



Page 24-8

DCRM SERIES

- Modular housing
- 2 steps
- Settings by front potentiometers
- 3 LED indications.



Page 24-9

DCRL SERIES (EXPANDABLE)

- Flush-mount housing:
 - DCRL 3 - DCRL 5 (96x96mm/3.78x3.78")
 - DCRL 8 (144x144mm/5.67x5.67")
- 3/5/8 steps, expandable with EXP series modules (step increment, digital outputs, communication ports, etc.)
- Backlit icon LCD
- Ethernet communication interface (only for DCRL 8)
- Alarm codes with scrolling texts, programmable in 6 languages (Italian, English, Spanish, French, German and Portuguese)
- Independent voltage measurement input
- Suitable for low and medium voltage systems
- Capacitor overload protection
- Internal panel temperature sensor
- Voltage and current harmonic-content measurement up to 15th order
- Front optical USB and Wi-Fi communication port for PC, smartphone and tablet connection
- Programmable alarms
- Protection via 2-level password to prevent all undesired access
- Compatible with **Synergy** supervision and energy management software, **Xpress** configuration and remote control software and with the **Sami1** application for Android/iOS.



Page 24-10

DCRG SERIES (EXPANDABLE)

- Flush-mount housing: DCRG 8 - DCRG 8IND (144x144mm/5.67x5.67")
- 8 steps, expandable with EXP series modules (step increment, inputs and outputs, communication ports, GPRS/GSM modem, data memory, etc.) and with Master-Slave function
- 128x80 backlit graphic LCD, facilitating data reading even in poor lighting conditions and the display of system information clearly and intuitively
- Ethernet communication interface
- Texts in 10 languages: Italian, English, Spanish, French, German, Czech, Polish, Russian, Portuguese and one customisable
- Voltage measurement input independent of supply input
- Suitable for low and medium voltage systems
- Capacitor overload protection
- Internal panel temperature sensor
- Voltage and current harmonic-content measurement up to 31st order
- Suitable for dynamic power factor correction.
- Power factor correction by single phase (SPPFC)
- Capacitive reactive power factor correction (DCRG 8IND version)
- Front optical USB and Wi-Fi communication port for PC, smartphone and tablet connection
- Programmable alarms
- Protection via 2-level password to prevent all undesired access
- Calendar-clock with backup reserve energy.
- Logging of up to 250 events
- Compatible with **Synergy** supervision and energy management software, **Xpress** configuration and remote control software and with the **Sami1** application for Android/iOS.



Page 24-13

THYRISTOR MODULES

- 30, 50, 100kvar
- Suitable for dynamic power factor correction
- Current flow zero-crossing controlled connection-disconnection
- Over-temperature protection
- Over-current protection capacitor switching.







- Microprocessor supervision and control
- Accurate TRMS measurement circuit
- Automatic intelligent adjustment system
- Versions from 2 to 24 steps and up to 32 with Master-Slave function
- Versions with static outputs
- Versions for capacitive reactive power factor correction
- Use in cogeneration and medium-voltage systems
- USB, serial, Ethernet communication interfaces
- Modbus-RTU and ASCII communication protocols
- Thyristor modules for dynamic correction.

Reactive current control relay

SEC. - PAGE

| | |
|---|----------------|
| DCRM series | 24 - 8 |
| Automatic power factor controllers | |
| DCRL series | 24 - 9 |
| DCRG series | 24 - 10 |
| Accessories | 24 - 12 |
| Communication devices | 24 - 12 |
| Thyristor modules | 24 - 13 |
| Dimensions | 24 - 14 |
| Wiring diagrams | 24 - 15 |
| Technical characteristics | 24 - 17 |




| |  |  |  |  |
|---|--|---|---|---|
| | DCRL 3 | DCRL 5 | DCRL 8 | DCRG 8 / DCRG 8IND |
| Steps | 3 (up to 6 with EXP10 07) | 5 (up to 8 with EXP10 07) | 8 (up to 14 with EXP10 07) | 8 (up to 18 relay outputs with EXP 1006 and EXP10 07) (up to 24 mixed relay and static outputs with EXP10 01) |
| ON FRONT/HOUSING | | | | |
| Display | Backlit icon LCD | | | 128x80 pixel backlit graphic LCD |
| Languages | 6 (scrolling text of alarm codes only) Italian, English, Spanish, French, German, Portuguese | | | 10 Italian, English, Spanish, French, German, Czech, Polish, Russian, Portuguese and 1 customisable |
| Dimensions | 96x96mm/ 3.78x3.78" | 96x96mm/ 3.78x3.78" | 144x144mm/ 5.67x5.67" | 144x144mm/ 5.67x5.67" |
| Protection rating | IP54 | IP54 | IP65 | IP65 |
| Expandable with EXP... modules | | ● | | ● |
| CONTROL/FUNCTIONS | | | | |
| Automatic recognition of current flow direction | | ● | | ● |
| 4-quadrant operation | | ● | | ● |
| Master-Slave function | | | | ● |
| Independent auxiliary supply input | | ● | | ● |
| Three-phase voltage control | | | | ● |
| Current inputs | 1 (by 5A or 1A CTs) | | | 3 (by 5A or 1A CTs) |
| Dynamic (FAST) power factor correction | | | | ● with EXP10 01 (maximum 16 static outputs) |
| Power factor correction by single phase | | | | ● |
| Possibility of connecting inductive steps | | | | ● (DCRG 8IND only) |
| Medium-voltage usage | | ● | | ● |
| Phase-neutral connection in three-phase systems | | ● | | ● |
| Analog inputs | | | | ● with EXP10 04 |
| Analog outputs | | | | ● with EXP10 05 |
| Input programmable as function or external temperature sensor | | | | ● with EXP10 04 |
| USB communication interface | | ● with EXP10 10 | | ● with EXP10 10 |
| RS232 communication interface | | ● with EXP10 11 | | ● with EXP10 11 |
| Opto-isolated RS485 communication interface | | ● with EXP10 12 | | ● with EXP10 12 |
| Ethernet communication interface | | ● with EXP10 13 (only for DCRL 8) | | ● with EXP10 13 and web server function |
| Opto-isolated Profibus-DP interface | | | | ● with EXP10 14 |
| GPRS/GSM modem | | | | ● with EXP10 15 |
| Optical USB communication port on front | | ● with CX 01 | | ● with CX 01 |
| Optical Wi-Fi communication port on front | | ● with CX 02 | | ● with CX 02 |
| Fast setting of current transformer | | ● | | ● |
| Compatible with Xpress configuration and remote control software | | ● | | ● |
| Compatible with Synergy supervision and energy management software | | ● | | ● |
| Compatible with Sam1 App | | ● | | ● |
| Calendar-clock with backup reserve power | | | | ● |
| Data logging memory | | | | ● with EXP10 30 |
| Event logging: alarms, setup changes, etc. | | | | ● |
| Customisable internal counters | | | | ● |



DCRL 3 DCRL 5 DCRL 8 DCRG 8 / DCRG 8IND

| MEASUREMENTS | | |
|---|--------------|------------------------------|
| Rated measurement voltage | 600VAC max | 600VAC max |
| Measurement voltage range | 50...720VAC | 50...720VAC |
| Instantaneous $\cos\varphi$ (power factor displacement) | ● | ● |
| Instantaneous and average weekly power factor values | ● | ● |
| Voltage and current | ● | ● |
| Reactive power to reach set-point and total values | ● | ● |
| Capacitor overload | ● | ● |
| Electrical panel temperature | ● | ● |
| Maximum voltage and current value | ● | ● |
| Maximum capacitor overload value | ● | ● |
| Maximum panel temperature value | ● | ● |
| Maximum capacitor temperature value | | ● with EXP10 04 and EXP10 15 |
| Active and apparent power value | | ● |
| Active, reactive, apparent energy | | ● |
| Current and voltage harmonic analysis | ● up to 15th | ● up to 31st |
| Var-measured value per step | ● | ● |
| Number of switches for each step | ● | ● |
| PROTECTIONS | | |
| Voltage too high and too low | ● | ● |
| Current too high and too low | ● | ● |
| Over compensation (capacitors disconnected and $\cos\varphi$ higher than set-point) | ● | ● |
| Under compensation (capacitors connected and $\cos\varphi$ lower than set-point) | ● | ● |
| Capacitor overload | ● | ● |
| Capacitor overload on all 3 phases | | ● |
| Over temperature | ● | ● |
| Mains micro-breaking | ● | ● |
| Capacitor bank failure | ● | ● |
| Over maximum n° of switches | ● | ● |
| Over maximum harmonic distortion level limit | ● | ● |
| Programmable alarm property (enable, trip delay, relay energising, etc.) | ● | ● |
| Capacitor protection | | ● with EXP10 16 |

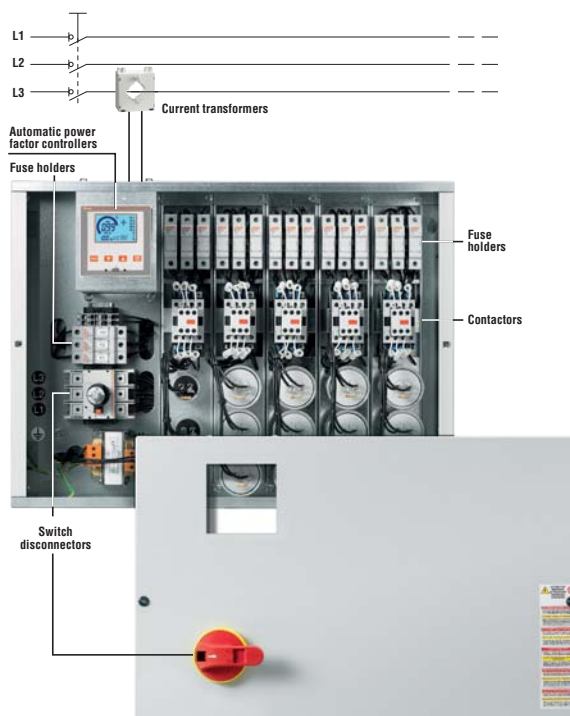


ESSENTIAL AND PERFORMANCE TOO!

DCRL 3 - DCRL 5



OPTICAL COMMUNICATION PORT

The optical port on the front permits communication with PCs, smartphones and tablets through the USB and Wi-Fi standards for carrying out programming, diagnostics and data download without disconnecting power to the electrical panel.

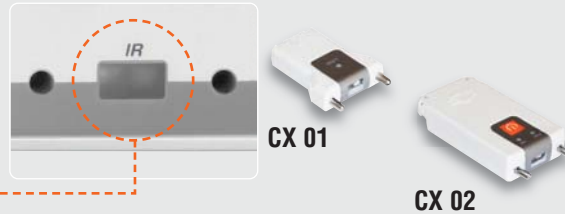

USER INTERFACE


The backlit icon LCD ensures excellent legibility as well as the texts for the display of measurements and description of alarms. The 4 navigation buttons are for settings and functions.

AN EXPANSION SLOT FOR EXP... SERIES MODULES

EXPANDABLE UP TO 8 STEPS

COMPACT SIZE

The space taken by the housing does not increase (96x96x73mm / 3.78x3.78x2.87") even with the expansion module fitted.

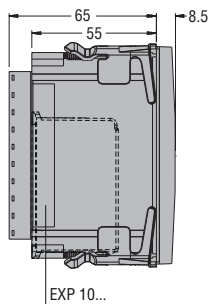

FIXING SYSTEM

The system of **fixing with clips** is simple, with a press to click into place and push to ensure hold over time. Correct application of the standard seal and clips in the panel ensures a front **IP54** protection degree.



EXPANSIBILITY

Basic controller functionality can be extended easily using the EXP series expansion modules:

- digital outputs
- relay outputs to increase number of steps
- opto-isolated USB interface
- opto-isolated RS232 interface
- opto-isolated RS485 interface.



SOFTWARE COMPATIBILITY

- **Sam1** Application for Android and iOS
- **Xpress** for configuration and remote control
- **Synergy** for supervision and energy management.

CHARACTERISTICS OF THE DCRL SERIES

WIDE RANGE OF VOLTAGE MEASUREMENTS

The wide measurement range between 50...720VAC L-L and between 50...415VAC L-N allows the controllers to be used in most applications.

SUITABLE FOR LOW- AND MEDIUM-VOLTAGE SYSTEMS

The controllers can be used in medium-voltage systems thanks to the ability to set a voltage transformer ratio, obtaining measurements regarding the transformer primary value both for adjustment and for the display.


ALARM MESSAGES IN 6 LANGUAGES

The alarm texts can be displayed in Italian, English, French, German, Portuguese and Spanish.

DEFECTIVE STEP

The DCRL measures the percentage of residual power for each step, comparing it with the value set in the main menu. The defective step alarm is generated if this value is below the set limit.

DCRL 8

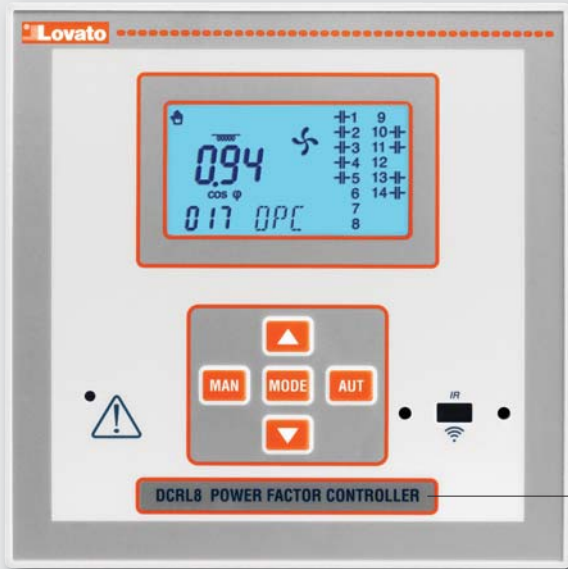

● USER INTERFACE

The backlit icon LCD ensures excellent legibility as well as the texts for the display of measurements and description of alarms. The 5 navigation buttons are for settings and functions, while an LED indicates the alarms and the optical port for communication via USB and Wi-Fi.

● EXPANDABLE UP TO 14 STEPS

● OPTICAL COMMUNICATION PORT

The optical port on the front permits communication with PCs, smartphones and tablets through the USB and Wi-Fi standards for carrying out programming, diagnostics and data download without disconnecting power to the electrical panel.

● TWO EXPANSION SLOTS FOR EXP... SERIES MODULES

● ETHERNET COMMUNICATION INTERFACE

By using the expansion module with EXP 1013.


● CUSTOMISATION

An insert for labels customised with text, logos, codes, etc. is available, to be fixed onto the controller frames.

● COMPACT SIZE

Reduced profile and depth simplify installation of the power factor controller even in very compact electrical panels.

The total depth of the controller is 73mm (2.87") inside the panel with the expansion modules installed.

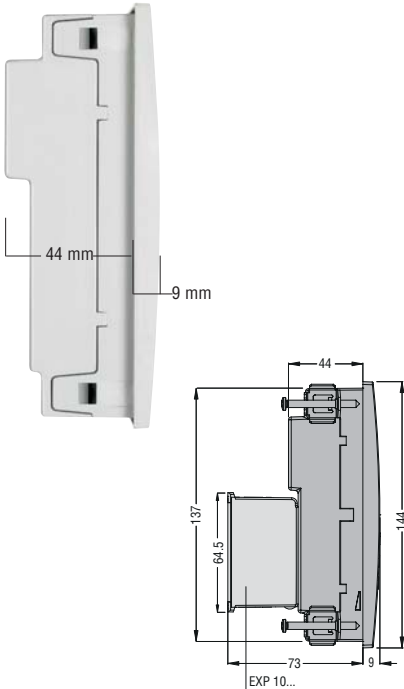

● FIXING SYSTEM

The fixing system with metal screws guarantees excellent, lasting hold over time.



● HIGH PROTECTION RATING

The front of the controller and seal have been designed to ensure a front protection rating of IP65.

● EXPANDABILITY

Basic controller functionality can be extended easily using the EXP series expansion modules:

- relay outputs to increase number of steps
- digital outputs
- opto-isolated RS232 interface
- opto-isolated RS485 interface
- opto-isolated ETHERNET interface.



MAX
2

● SOFTWARE COMPATIBILITY

- **Sam1** Application for Android and iOS
- **Xpress** for configuration and remote control
- **Synergy** for supervision and energy management.

● CHARACTERISTICS OF THE DCRL SERIES

- 5A OR 1A IN THE SAME CONTROLLER

A parameter can enable the controller for use with a 5A or 1A secondary current transformer.

- WHITE BACKLIT DISPLAY

It can be programmed to flash during alarm conditions.

- HARMONIC ANALYSIS

It includes voltage and current THD measurements and single harmonic measurement up to the 15th order and they can be shown on the display.

- MAINTENANCE INTERVALS

There are 2 counters: one to count the operating hours for the steps and the other for the number of interventions of each step. An alarm threshold can be set for both counters.

- BUILT-IN TEMPERATURE SENSOR

The internal temperature of the controller is monitored constantly by the built-in sensor. The user can program the thresholds to activate and stop the cooling fan and/or generate the temperature alarm.


THE SOLUTION FOR ALL APPLICATIONS!

DCRG 8

- **BACKLIT GRAPHIC LCD**
High-legibility 128x80 pixels, with adjustable brightness.




- **OPTICAL COMMUNICATION PORT**
The optical port on the front permits communication with PCs, smartphones and tablets through the USB and Wi-Fi standards for carrying out programming, diagnostics and data download without disconnecting power to the electrical panel.

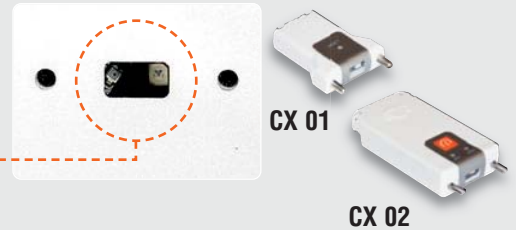


- **CUSTOMISATION**
There is a customisation slot available on the front panel for the description of the controller by adding texts, logos, codes, etc.

● COMPACT SIZE

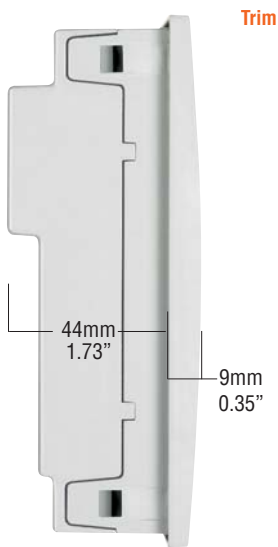

Frame profile and reduced total depth simplify installation of the controller also in very compact electric panels.

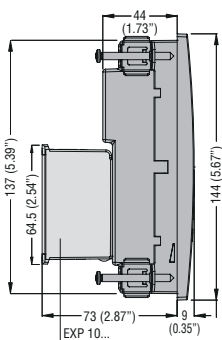

● FIXING SYSTEM



The fixing system with metal screws guarantees excellent adhesion over time.

- **HIGH PROTECTION DEGREE**
The controller front and the rear seal have been designed to warrant an IP54 protection degree.

● EXPANDABILITY



Basic controller functionality can be extended easily using the EXP series expansion modules:

- Relay outputs to increase the number of steps
- Opto-isolated static outputs (also for dynamic correction)
- Capacitor protection
- Digital and analog inputs and outputs
- Expandable up to 24 mixed outputs
- Opto-isolated RS232 interface
- Opto-isolated RS485 interface
- Opto-isolated ETHERNET interface with web server function
- Opto-isolated Profibus-DP interface
- GPRS/GSM modem
- Data memory, calendar-clock with backup reserve power for data logging.



- SUITABLE FOR POWER FACTOR CORRECTION USING CONTACTORS AND THYRISTOR MODULES
- INDEPENDENT POWER FACTOR CORRECTION FOR EACH SINGLE PHASE
- CAPACITIVE REACTIVE POWER FACTOR CORRECTION VIA INDUCTIVE STEP MANAGEMENT (WITH DCRG 8IND MODEL)
- SMS SENDING FOR ALARM CONDITIONS
- DATA SENDING BY EMAIL OR FTP SERVER
- WEB SERVER FOR DATA READING
- STREAMLINE DESIGN

The DCRG controller has an ergonomic design and, at the same time, particular care has been given to details.

● MASTER-SLAVE FUNCTION

The DCRG controller can control the outputs of other analog controllers in addition to its own steps. In this way, it offers a **Master-Slave** architecture. Up to 8 slaves can be controlled to create a system with a maximum of 32 steps.



Master



Slave 1



Slave 2



Slave 8

● WEB SERVER FUNCTION



By installing the **Ethernet** expansion module EXP10 13, the main measured values of the controller can be viewed by the most common web clients on the market compatible with Java, with no need to install any additional software on the PC.

● CAPACITOR PROTECTION

By adding the dedicated EXP10 16 expansion module, the DCRG controller can be equipped with additional capacitor protection functions. The module can measure the harmonic current values and the capacitor temperature on-site as well as detecting malfunction on any phase.

● 3 CURRENT INPUTS

- **Independent power factor correction** for each single phase
- Analysis of all electrical measurements in the system (multimeter).

● WIDE RANGE OF RATED VOLTAGE MEASUREMENTS

The wide measurement range between 100...600VAC allows the controller to be used in most applications.

● GSM/GPRS MODEM

With the EXP10 15 expansion module, the controller is equipped with a GSM/GPRS modem, which it automatically configures. This simplifies installation and wiring. Once a data-enabled SIM card is inserted, the controller can send alarm or event SMS and **e-mails** and data files can be transmitted to FTP servers.


● 5A AND 1A BOTH ON THE SAME CONTROLLER

By configuring a specific parameter, the controller can be enabled for use with either a 5A or 1A secondary current transformer.

● GRAPHS AND TEXTS IN 10 LANGUAGES



Display of waveforms, graphs and texts in 10 languages: Italian, English, Spanish, French, German, Czech, Polish, Russian, Portuguese and one customisable.

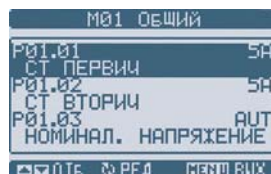

● SUITABLE FOR MEDIUM-VOLTAGE SYSTEMS

The controller can be used in medium-voltage systems thanks to the ability to set a voltage transformer ratio, obtaining measurements regarding the transformer primary value both for adjustment and for the display.

● SUITABLE FOR DYNAMIC (FAST) POWER FACTOR CORRECTION

Thanks to the EXP10 01 expansion modules with static outputs, thyristor-based dynamic power factor correction systems can be created where the reactive load varies rapidly over time. By taking advantage of the built-in relay outputs as well, a mixed traditional (relay) and dynamic system can be obtained.

● INDEPENDENT POWER FACTOR CORRECTION FOR EACH SINGLE PHASE (SPFFC)

In highly unbalanced three-phase systems, power factor correction by single phase can be implemented. The DCRG controller can monitor the $\cos\phi$ of each single phase and correct through the joint use of single- and three-phase capacitor banks.

● CAPACITIVE REACTIVE POWER FACTOR CORRECTION (DCRG 8IND).

The DCRG 8IND version can connect both capacitors and inductors to achieve the desired $\cos\phi$ should it be necessary to correct the capacitive reactive power factor as well.

● SOFTWARE COMPATIBILITY

- **Sam1** Application for Android and iOS
- **Xpress** for configuration and remote control
- **Synergy** for supervision and energy management.

DCRM series



DCRM 2

| Order code | Steps | Auxiliary supply voltage | Qty per pkg | Wt |
|---|-------|--------------------------|-------------|-------|
| | no. | [V] | n° | [kg] |
| Single and three-phase low-voltage systems. | | | | |
| DCRM 2 | 2 | 380...415VAC | 1 | 0.284 |

General characteristics

The DCRM allows the reactive current of a system to be controlled.

It can correct to the best $\cos\varphi$ value possible, reducing the request for reactive current from the mains.

It can control the connection of two capacitor banks. Each one can be individually enabled and its power can be set through a dedicated trimmer.

It is also possible to adjust the time for connection and disconnection of the capacitors, thereby modifying the reaction speed of the system.

The controller can be used both in three- and single-phase wiring.

Operational characteristics

- Auxiliary supply voltage:
 - 380...415VAC standard
 - 220...240VAC and 440...480VAC on request
- Rated frequency: 50/60Hz
- 80...528VAC voltage measurement input
- Current measurement input:
 - By CT /5A
 - Measuring range: 0.1...6A
 - Measurement type: true root mean square (TRMS)
 - Automatic identification of CT connection polarity (straight / inverted)
- Relay outputs:
 - 2 relays (steps), each with 1 changeover contact
 - Rated current: 8A 250VAC (AC1)
 - Individual enablement of control of the two relays
- Modular DIN 43880 housing (3 modules)
- IEC degree of protection: IP40 on front (if placed in IP40 housing and/or electrical panel), IP20 terminals.

ADJUSTMENTS

| | |
|------------------------|--|
| "C/K Step 1" | C/K ratio step 1 (0.15...2) |
| "C/K Step 2" | C/K ratio step 2 (0.15...2) |
| "Connection delay" | Step connection delay 1...60s |
| "Disconnection delay" | Step disconnection delay 0.1...60s |
| "System configuration" | Single- or three-phase wiring selection. |

INDICATIONS

- 1 green LED for power on and inhibition time
- 2 red LEDs for relay connection.

Certifications and compliance

Certifications obtained: EAC; UL Listed, for USA and Canada (File E93601), as Auxiliary Devices-Modular ampere monitoring relays (with 415VAC maximum only). Compliant with standards: IEC/EN 60255-5, IEC/EN 61010-1, IEC/EN 61000-6-2, IEC/EN 61000-6-3, UL508, CSA C22.2 n°14.

DCRL series



DCRL 3 - DCRL 5



DCRL 8



EXP80 00



EXP 10...

Snap-in fixing of EXP... expansion modules
DCRL 3 - DCRL 5 with 1 module




MAX
1

DCRL 8 with 2 modules



MAX
2

Backlit icon LCD

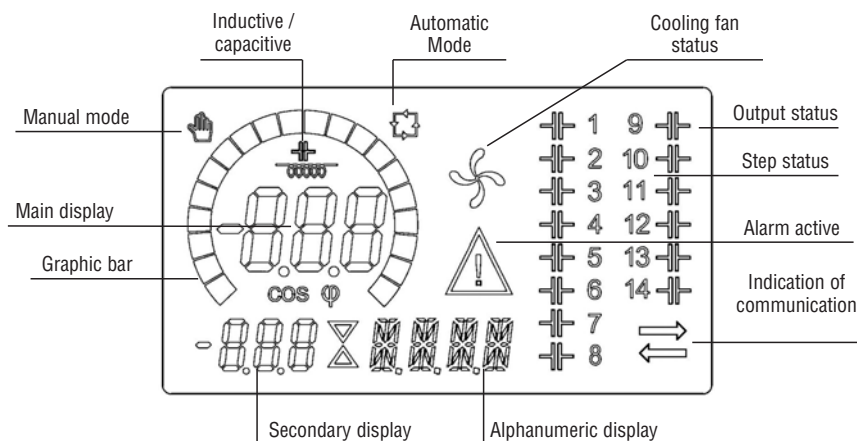

| Order code | Description | Qty per pkg | Wt |
|--|--|-------------|-------|
| | | n° | [kg] |
| Single and three-phase low and medium-voltage systems. | | | |
| DCRL 3 | 3 steps, expandable up to 6 steps, 100...440VAC | 1 | 0.340 |
| DCRL 5 | 5 steps, expandable up to 8 steps, 100...440VAC | 1 | 0.340 |
| DCRL 8 | 8 steps, expandable up to 14 steps, 100...440VAC | 1 | 0.640 |

new

| Order code | Description | Qty per pkg | Wt |
|------------|--|-------------|-------|
| Accessory. | | | |
| EXP80 00 | Plastic insert for customisation label (only for DCRL 8) | 10 | 0.050 |

| Order code | Description |
|------------|-------------|
|------------|-------------|

EXPANSION MODULES.
Additional steps.

new

| | |
|----------|---|
| EXP10 06 | 2 relay outputs to increase number of power factor correction steps |
| EXP10 07 | 3 relay outputs to increase number of power factor correction steps |

Inputs and outputs.

| | |
|----------|---------------------------|
| EXP10 03 | 2 relay outputs 5A 250VAC |
|----------|---------------------------|

Communication ports.

| | |
|----------|--|
| EXP10 10 | Opto-isolated USB interface |
| EXP10 11 | Opto-isolated RS232 interface |
| EXP10 12 | Opto-isolated RS485 interface |
| EXP10 13 | Opto-isolated ETHERNET interface (only for DCRL 8) |

General characteristics

The DCRL series was developed with advanced functionality and produced with a dedicated ultra-compact housing. It combines modern front design with practical mounting and expandability (EXP... modules). Its main features are:

- Backlit icon LCD with excellent information display
- Alarm codes with scrolling texts, programmable in 6 languages (Italian, English, Spanish, French, German and Portuguese)
- Connection in single or three phase lines and co-generation systems with 4-quadrant operation
- Voltage measurement input independent of supply and which can be used in medium-voltage lines with VTs
- Drastic reduction in the number of switching operations
- Balanced use of steps with same power rating
- Measurement of reactive power installed for each step
- Capacitor over-current protection
- Panel over-temperature protection via internal sensor
- Accurate micro-breaking protection
- Vast choice of measurements available, including voltage and current THD with single harmonic analysis up to the 15th order.
- Wide voltage measurement range
- High accuracy of true root mean square (TRMS) measurements
- Front optical USB (CX 01 dongle) and Wi-Fi (CX 02 dongle) communication port for PC, smartphone and tablet connection
- Compatible with Ethernet communication modules EXP10 13 (only for DCRL 8)
- Compatible with Synergy supervision and energy management software, Xpress configuration and remote control software and with the Sam1 application for Android/iOS.
- Customisation with label on front (only for DCRL 8).

Operational characteristics

- Supply:
 - Auxiliary voltage: 100...440VAC
 - Frequency: 50/60Hz ±10%
- Voltage input:
 - Rated voltage: 600VAC L-L (346VAC L-N)
 - Frequency range: 45...65Hz
- Current input:
 - Single-phase connection
 - Rated current: 1A or 5A, configurable
- Measurements and control:
 - Power factor adjustment: 0.5ind...0.5cap.
 - Voltage measurement range: 50...720VAC L-L; 50...415VAC L-N
 - Current measurement range: 0.025...1.2A for 1A full scale; 0.025...6A for 5A full scale
 - Type of voltage and current measurement: true root mean square (TRMS).
- Relay outputs (steps):
 - DCRL 3: 3 outputs
 - DCRL 5: 5 outputs
 - DCRL 8: 8 outputs
 - Contact arrangement: NO; the last is a changeover
 - Rated current: 5A 250VAC AC1
- Flush-mount housing:
 - DCRL 3, DCRL 5 (96x96mm / 3.78x3.78"); DCRL 8 (144x144mm / 5.67x5.67")
- IEC degree of protection:
 - DCRL 3, DCRL 5 IP54 and DCRL 8 IP65 on front; IP20 on terminals for all.

Certifications and compliance:

Certifications obtained: UL Listing for USA and Canada (cULus - File E93601), as Auxiliary Devices - Power factor controllers, EAC, RCM. Compliant with standards: IEC/EN 61010-1, IEC/EN 61000-6-2, IEC/EN 61000-6-3, UL508, CSA C22.2 n°14.

Contactors for power factor correction

See section 2, page 2-14.

Software: Synergy, Xpress and Sam1

See section 27.

EXP expansion modules

See section 28.

DCRG series



DCRG 8

new

| Order code | Description | Qty per pkg | Wt |
|------------------|---|-------------|-------|
| | no. | n° | [kg] |
| DCRG 8 | 8 steps, expandable up to 24 steps, 100...440VAC | 1 | 0.980 |
| DCRG 8IND | 8 steps, expandable up to 24 steps, 100...440VAC, for capacitive reactive power factor correction | 1 | 0.980 |

Accessories.

| Order code | Description | Qty per pkg | Wt |
|---------------|--|-------------|-------|
| NTC 01 | Remote temperature sensor, length 3m/3.3yd | 1 | 0.150 |

| Order code | Description |
|------------|-------------|
|------------|-------------|

EXPANSION MODULES

Additional steps.

| | |
|-----------------|---|
| EXP10 06 | 2 relay outputs to increase number of power factor correction steps |
| EXP10 07 | 3 relay outputs to increase number of power factor correction steps |

Inputs and outputs.

| | |
|-----------------|--|
| EXP10 00 | 4 opto-isolated digital inputs |
| EXP10 01 | 4 opto-isolated static outputs to increase number of static steps |
| EXP10 02 | 2 digital inputs and 2 opto-isolated static outputs |
| EXP10 03 | 2 relay outputs 5A 250VAC |
| EXP10 04 | 2 PT100 opto-isolated analogue inputs, either 0/4...20mA, 0...10V or 0...±5V |
| EXP10 05 | 2 opto-isolated analogue inputs 0/4...20mA, 0...10V or 0...±5V |
| EXP10 08 | 2 opto-isolated digital inputs and 2 relay outputs 5A 250VAC |
| EXP10 16 | Capacitor protection with 2 inputs for temperature measurement with NTC sensors and 2 three-phase measurement inputs |

Communication ports.

| | |
|-----------------|---|
| EXP10 10 | Opto-isolated USB interface |
| EXP10 11 | Opto-isolated RS232 interface |
| EXP10 12 | Opto-isolated RS485 interface |
| EXP10 13 | Opto-isolated ETHERNET interface with web server function |
| EXP10 14 | Opto-isolated Profibus-DP interface |
| EXP10 15 | GPRS/GSM modem, without antenna |

Other functions.

| | |
|-----------------|--|
| EXP10 30 | Data memory, calendar-clock with backup reserve power for data logging |
|-----------------|--|

❶ For configuration via software, contact our Customer Service Office (Tel. +39 035 4282422; E-mail: service@LovatoElectric.com).



EXP 10...

new

Maximum expandability DCRG 8 / DCRG 8IND

| DCRG 8 / DCRG 8IND | EXP10 06 | EXP10 07 | EXP10 01 | TOTAL STEPS | |
|--------------------|-----------------------------|-----------------------------|------------------------------|-------------|--------|
| | | | | Relay | Static |
| Controller | Module with 2 relay outputs | Module with 3 relay outputs | Module with 4 static outputs | | |
| Steps | no. of modules | no. of modules | no. of modules | | |
| 8 | 4 (2 steps) | – | – | 16 | – |
| 8 | 2 (2 steps) | max. 2 (3 steps) | – | 18 | – |
| 8 | – | – | max. 4 (4 steps) | 8 | 16 |

Snap-in fixing of 4 EXP... expansion modules DCRG 8 / DCRG 8IND



MAX 4

General characteristics

The DCRG automatic power factor controller satisfies the technical requirements of modern electrical systems in industry.

It is designed to satisfy them, with the option of extending its functionality by using specific EXP series expansion modules. Mention should also be made of the optical communication port as standard, for programming the controller, diagnostics and data download.

The backlit graphic LCD facilitates data reading even in poor lighting conditions and permits the display of system information clearly and intuitively.

Its main features are:

- 128x80-pixel backlit graphic LCD with texts in 10 languages: Italian, English, Spanish, French, German, Czech, Polish, Russian, Portuguese and one customisable
- Connection in single and three-phase lines as well as three-phase lines with neutral control and cogeneration systems (4 quadrants)
- Capacitive reactive power factor correction (DCRG 8IND)
- Independent power factor correction for each single phase (SPPFC)
- Use with medium-voltage lines with VTs
- Capability for correct operation even in systems characterised by high harmonic content
- Drastic reduction in the number of switching operations
- Balanced use of steps with same power rating
- Measurement of reactive power installed for each step
- Recording of the number of connections for each step
- Capacitor over-current protection on all three phases
- Panel over-temperature protection via internal sensor and external sensor
- Accurate micro-breaking protection
- Current and voltage harmonic analysis
- Quick CT programming function
- USB (CX 01 dongle) and Wi-Fi (CX 02 dongle) communication port for PC, smartphone and tablet connection
- Modbus-RTU TCP and ASCII communication protocol
- Compatible with Synergy supervision and energy management software, Xpress configuration and remote control software and with the Sam1 application for Android/iOS
- Sending and reception of SMS, sending of e-mails with alarm diagnosis and data files, FTP Client function (with EXP10 15 module).

Operational characteristics

- Voltage measurement circuit:
 - Auxiliary supply voltage: 100...415VAC
 - Rated frequency: 50/60Hz (±10%)
- Current measurement circuit:
 - Single and three-phase input
 - Rated current: 5A (1A programmable)
- Measurements and control:
 - Power factor adjustment: 0.5ind...0.5cap.
 - Voltage measurement range: 50...720VAC
 - Current measurement range: 0.025...6A
 - Temperature measurement range: -30...+85°C
 - Capacitor overload current measurement range: 0...250%
 - Type of voltage and current measurement: true root mean square (TRMS).
- Relay outputs:
 - 7 each with NO contact and the last as changeover
 - Rated current: 5A 250VAC AC1
- Flush-mount housing (144x144mm / 5.67x5.67")
- IEC degree of protection: IP65 on front; IP20 on terminals.

Certifications and compliance

Certifications obtained: UL Listing for USA and Canada (cULus - File E93601), as Auxiliary Devices - Electronic power factor regulator, EAC, RCM (only for DCRG 8). Compliant with standards: IEC/EN 61010-1, IEC/EN 61000-6-2, IEC/EN 61000-6-3, UL508, CSA C22.2 n°14.

Contactors for power factor correction

See section 2, page 2-14.


Software: Synergy, Xpress and Sam1

See section 27.

EXP expansion modules

See section 28.

“Master-Slave” power factor correction system with DCRG 8

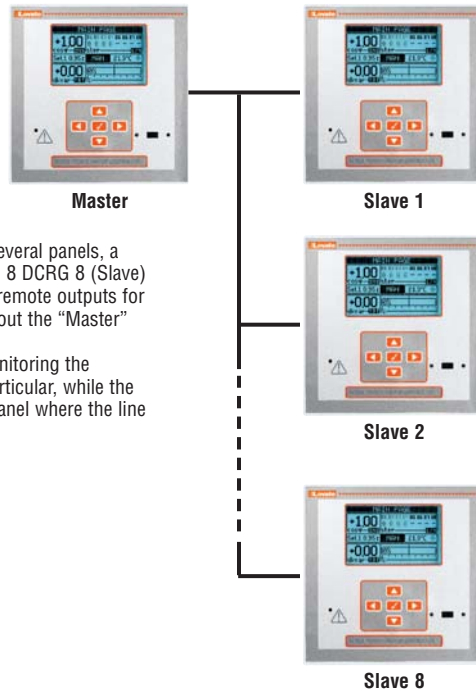

When the correction system is divided into several panels, a DCRG 8 (Master) controller can control up to 8 DCRG 8 (Slave) controllers. The “Slave” controllers serve as remote outputs for the connection of capacitor banks that carry out the “Master” controller’s commands.

The single controllers are responsible for monitoring the electrical panel and the capacitor banks in particular, while the $\cos\phi$ reading is centralised in the “Master” panel where the line arrives.

Software and APP


Xpress configuration and remote control software



Synergy Supervision and energy management software



Sami APP

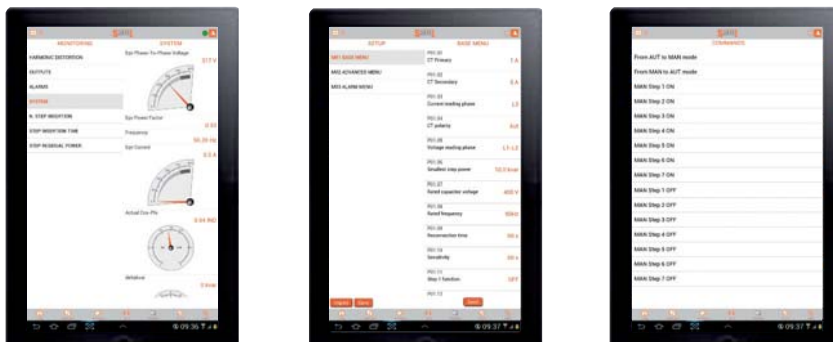

General characteristics

By using the **Xpress** software, the quick setup of the controllers can be carried out via PC, avoiding parameter programming errors.

The parameter programming of a DCRL... or DCRG 8 controller can also be saved on PC and quickly loaded into another device requiring the same programming.

It permits the following operations:

- System operation monitoring:
 - Graphical and numerical display of measurements
 - Controller status
- Capacitor efficiency control
 - Current kvar measurement for each step
 - Counters for the number of connections for each step
 - Total hour counter for connection time for each individual step
 - Access all setup parameters
 - Saving / loading parameters
 - Highlighting of changed values
 - Resetting to default values.

The **Synergy** software permits remote control and supervision of the DCRL... and DCRG 8 controllers. See section 27 for details.

This software has structures and applications based on MS SQL relational databases, and the data can be consulted using the most popular browsers.

It is a highly versatile system, simultaneously accessible to a large number of users/workstations via intranets, VPN or Internet.

APP for smartphone and tablet

The **Sami** application allows the user to program the controller, view alarms, send commands, read measurements, download statistical data and events and send retrieved data by e-mail. The connection is made by Wi-Fi with a smartphone or tablet using the CX 02 device. It is iOS and Android compatible.

For details, consult section 27 or our Customer Service office; see contact details on inside front cover.



Accessories for DCRL and DCRG



51 C4

| Order code | Description | Qty per pkg | Wt |
|------------|--|-------------|-------|
| | | n° | [kg] |
| 51 C2 | Connection cable PC↔DCRL/DCRG+ EXP10 11 length 1.8m/2yd | 1 | 0.090 |
| 51 C4 | Connection cable PC↔converter 4 PX1, length 1.8m/2yd | 1 | 0.147 |
| 51 C5 | Connection cable DCRL/DCRG+ EXP1011↔Modem length 1.8m/2yd | 1 | 0.111 |
| 51 C6 | Connection cable DCRG+EXP10 11↔ converter 4 PX1, length 1.8m/2yd | 1 | 0.102 |
| 51 C9 | Connection cable PC↔Modem, length 1.8m/2yd | 1 | 0.137 |
| EXC CON 01 | RS485/ Ethernet converter, 12...48VDC, including DIN rail fixing kit | 1 | 0.400 |
| 4 PX1 | RS232/RS485 converter drive, galvanically isolated, 220...240VAC (110...120VAC on request) | 1 | 0.600 |
| EXC M3G 01 | RS485 Gateway/3G modem, 9.5...27VAC/9.5...35VDC, including antenna and programming cable | 1 | 0.340 |

❶ Consult our Customer Service for modem details; see contact details on inside front cover.

❷ Opto-isolated RS232/RS485 analog modem, 38,400 Baud-rate maximum, automatic or manual TRANSMIT line supervision, 220...240VAC ±10% power supply (110...120VAC on request).

Communication devices



CX 01



CX 02



CX 03

| Order code | Description | Qty per pkg | Wt |
|----------------------|--|-------------|-------|
| | | n° | [kg] |
| CX 01 | USB/optical dongle PC↔DCRL/DCRG, for programming, data download, diagnostics and updating firmware | 1 | 0.090 |
| CX 02 | Wi-Fi connection device for PC↔DCRL/DCRG, for downloading data, programming, diagnostics and cloning | 1 | 0.090 |
| For DCRG8 type only. | | | |
| CX 03 | GSM penta-band antenna (850/900/1800/1900/2100MHz) for EXP10 15 expansion. | 1 | 0.090 |

General characteristics

Communication and connection devices to connect the DCRL and DCRG power factor controllers to personal computers, smartphones and tablets.

CX 01

This USB dongle, complete with cable, permits connection of the power factor controller with a PC without needing to disconnect the electrical panel supply, in order to:

- Program parameters
- Copy the settings to external units
- Download data and events
- Carry out diagnostics
- Update the firmware.

The PC identifies the connection as a standard USB.

CX 02

Via Wi-Fi connection, the power factor controllers can be viewed from PCs, smartphones and tablets without having to connect cables, in order to:

- Program parameters
- Download data and events
- Carry out diagnosis and cloning of the device.

CX 03

Compatible with major worldwide mobile phone networks, thanks to the use of 850/900/1800/1900/2100MHz frequencies.

IEC degree of protection: IP67.

Fixing hole Ø10mm (0.40").

Cable length 2.5m/2.73yd.

For dimensions, wiring diagrams and technical characteristics, consult the manuals available online in the Download section of the following website:

www.LovatoElectric.com



DCTM3 400...

| Order code | Step power | Qty per pkg | Wt |
|---------------|--------------------------------------|-------------|-------|
| | [kvar] | n° | [kg] |
| DCTM3 400 030 | Module for 30kvar step, 400...480VAC | 1 | 4.300 |
| DCTM3 400 050 | Module for 50kvar step, 400...525VAC | 1 | 4.300 |
| DCTM3 400 100 | Module for 100kvar step 400...525VAC | 1 | 5.600 |

Power rating available depending on voltage

| | DCTM3 400 030 | DCTM3 400 050 | DCTM3 400 100 |
|----------------|---------------|---------------|---------------|
| Current Ie [A] | 43A | 72A | 144A |
| Voltage [VAC] | Power [kvar] | Power [kvar] | Power [kvar] |
| 400 | 30 | 50 | 100 |
| 440 | 33 | 55 | 110 |
| 480 | 36 | 60 | 120 |
| 525 | — | 66 | 131 |

General characteristics

- suitable for dynamic (fast) power factor correction
- connection at current flow zero-crossing
- capacitor over-current protection on connection
- over-temperature protection via built-in sensor.

Operational characteristics

- 30kvar, 50kvar and 100kvar steps
- Rated operating voltage:
 - 400...480VAC for DCTM3 400 030
 - 400...525VAC for DCTM3 400 050 and DCTM3 400 100
- Auxiliary fan supply voltage: 230VAC (only for DCTM3 400 100)
- Rated frequency: 50/60Hz
- Control circuit: 8...30VDC
- Controlled voltages: 2
- Forced ventilation: DCTM3 400 100 only
- Ambient conditions:
 - Operating temperature: -10...+45°C
 - Use at higher temperatures with power derating (see page 24-19)
- IEC degree of protection: IP10.

INDICATIONS


- Auxiliary power on
- Over-temperature alarm
- Trigger LED.

Compliance:

Compliant with standards: EN 50178.

REACTIVE CURRENT CONTROL RELAY


DCRM 2

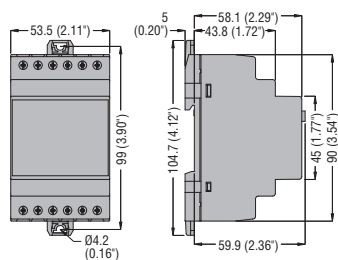

AUTOMATIC POWER FACT CONTROLLERS


DCRL 3 - DCRL 5

Cutout

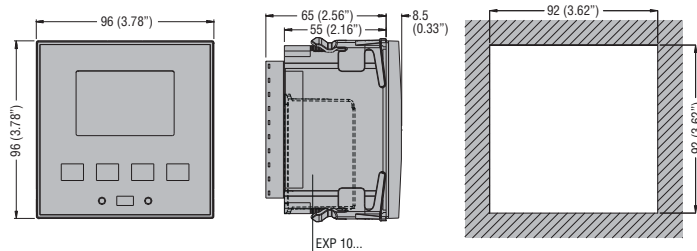

DCRL 8 - DCRG 8...




Cutout

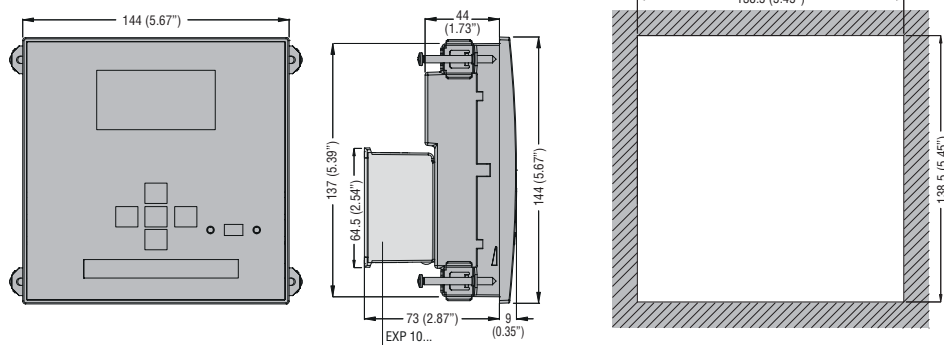

THYRISTOR MODULES

DCTM3 400 030 - DCTM3 400 050


DCTM3 400 100

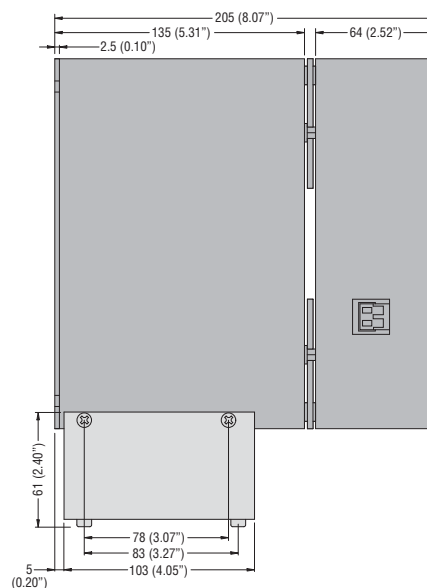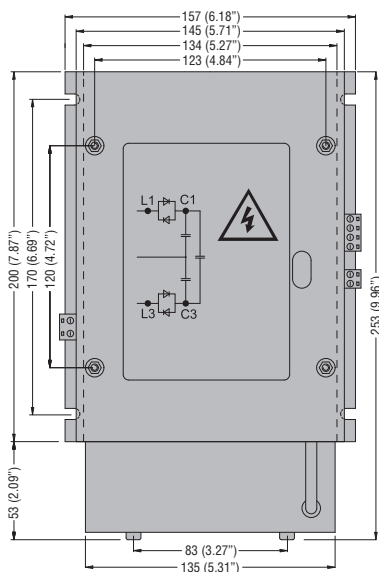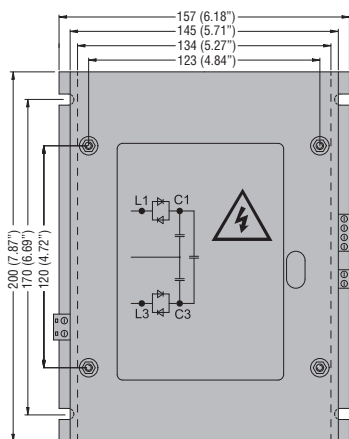


REACTIVE CURRENT CONTROL RELAY

DCRM 2

Single-phase connection

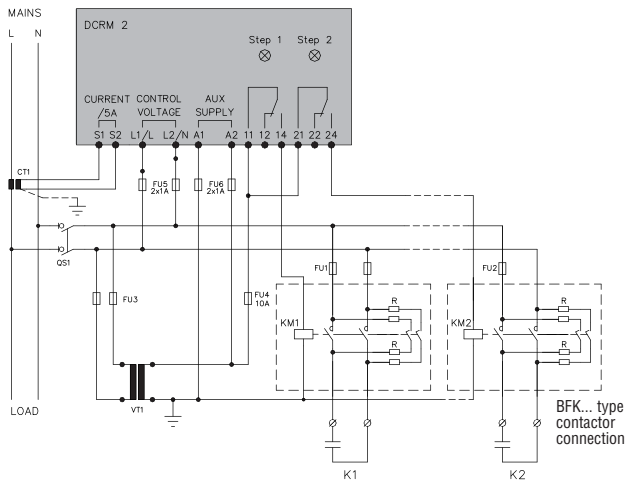

Three-phase connection

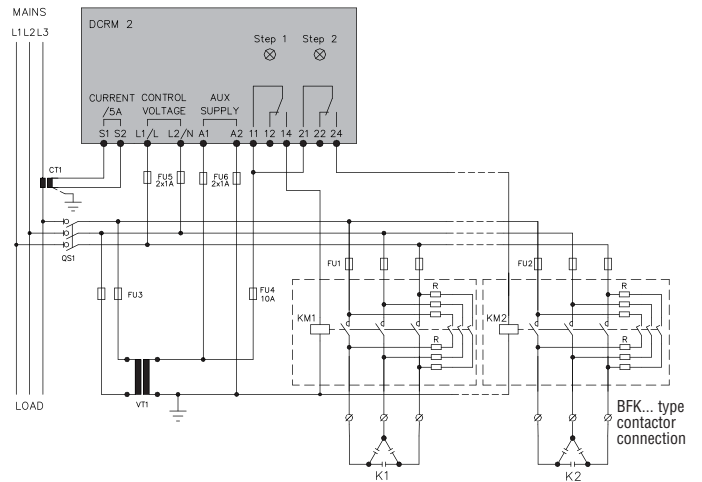


IMPORTANT

- For three-phase connection, the voltage measurement input must be connected between two phases; the line CT must be connected on the remaining phase.
- The polarity of the current measurement input is irrelevant.

CAUTION! Always disconnect the power supply when operating on the terminals.

AUTOMATIC POWER FACTOR CONTROLLERS

DCRL... with BFK... type contactors

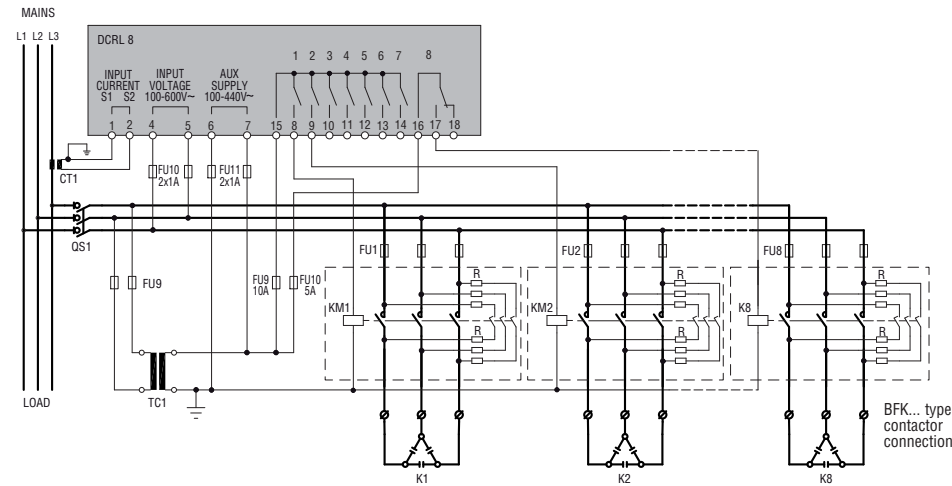


IMPORTANT

- For three-phase connection, the voltage measurement input must be connected between two phases; the line CT must be connected on the remaining phase.
- The polarity of the current measurement input is irrelevant.

CAUTION! Always disconnect the power supply when operating on the terminals.

AUTOMATIC POWER FACTOR CONTROLLERS

DCRG 8 with BF...K type contactors

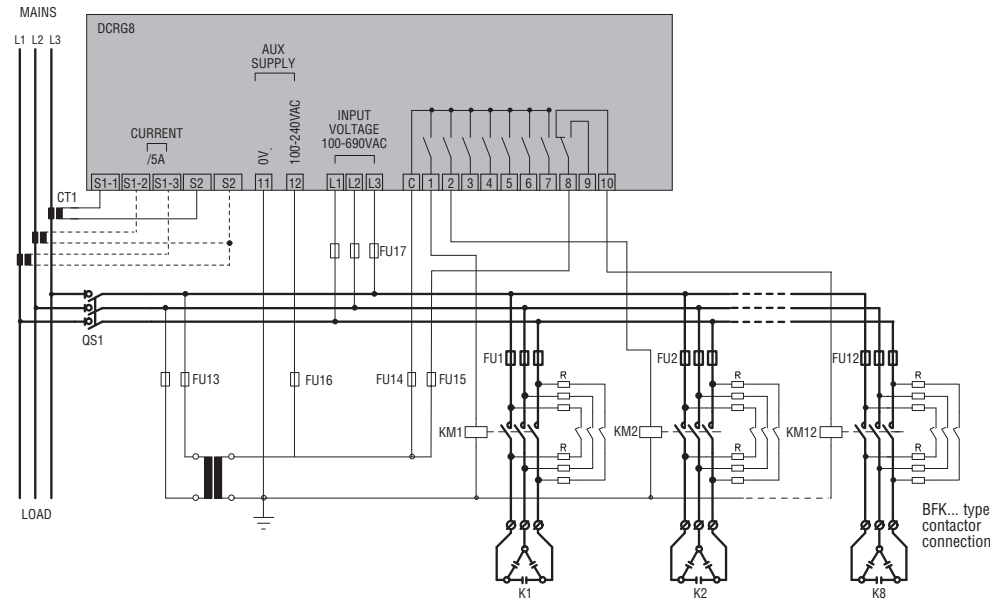


IMPORTANT

- For three-phase connection, the voltage measurement input must be connected between two phases; the line CT must be connected on the remaining phase.
- The polarity of the current measurement input is irrelevant.


CAUTION! Always disconnect the power supply when operating on the terminals.

DCRG 8IND

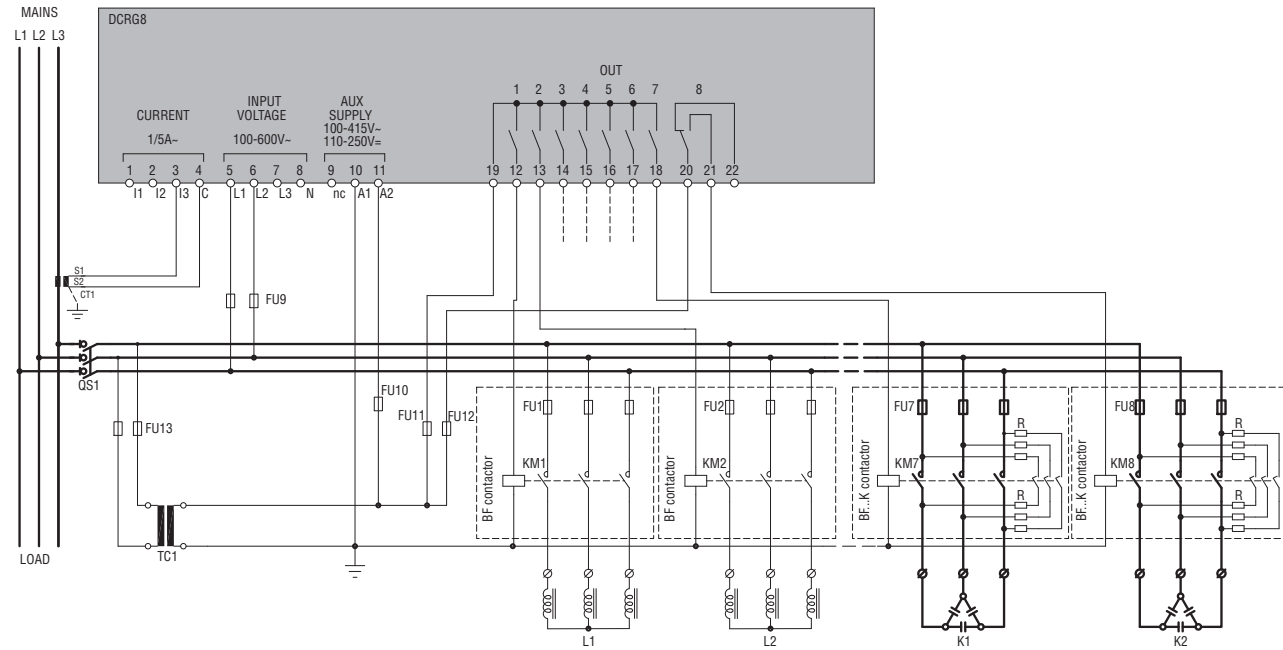

THYRISTOR MODULES

DCTM3 400...

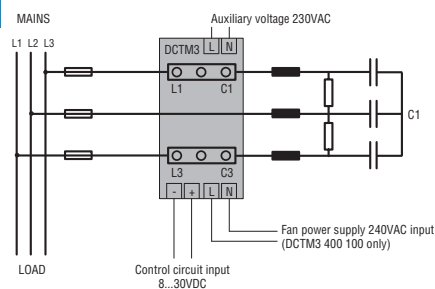

| TYPE | DCRM 2 |
|---|--|
| AUXILIARY SUPPLY CIRCUIT | |
| Rated auxiliary voltage (Us) | 380...415VAC standard 220...240VAC and 440...480VAC on request ^① |
| Operating range | 0.85...1.1 Us |
| Rated frequency | 50/60Hz ±5% |
| Maximum power consumption/dissipation | 4.4VA / 2.4W |
| Micro-breaking immunity | ≤17ms |
| No-voltage release | ≥8ms |
| VOLTAGE INPUT | |
| Maximum rated voltage Ue | 480VAC ^① |
| Measuring range | 80...528VAC |
| Frequency range | 50 or 60Hz ±1% self configurable |
| Measurement input impedance | >1MΩ |
| Type of connection | L1-L2 or -N |
| CURRENT INPUT | |
| Type of connection | By current transformer (CT) |
| Rated current Ie | 5A AC |
| Measurement range | 0.1...6A |
| Type of input | Shunt supplied by external current transformer (low voltage). Max. 5A |
| Measurement method | True RMS value |
| Overload capacity | +20% Ie |
| Overload peak | 10In for 1s |
| Dynamic limit | 160A for 10ms |
| Burden | ≤0.6W |
| ADJUSTMENTS | |
| C/K step 1 and 2 | OFF / 0.15...2 |
| Connection / disconnection | 1...60s |
| System configuration | 3-phase - 1-phase |
| RELAY OUTPUTS | |
| Number of relays | 2 (each with 1 changeover) |
| Rated operational voltage | 250VAC |
| Maximum switching voltage | 400VAC |
| IEC conventional free air thermal current (Ith) | 8A |
| IEC/EN 60947-5-1 and UL/CSA designation | B300 |
| Electrical life with rated load | 10 ⁵ cycles |
| Mechanical life | 30x10 ⁶ cycles |
| INSULATION (input-output) | |
| Rated insulation voltage | 480VAC |
| CONNECTIONS | |
| Maximum tightening torque | 0.8Nm (7 lbin; 7-9 lbin according to UL/CSA) |
| Conductor section min....max. | 0.2...4.0mm ² (24...12 AWG; 18...12 AWG according to UL/CSA) |
| AMBIENT CONDITIONS | |
| Operating temperature | -20...+60°C |
| Storage temperature | -30...+80°C |
| HOUSING | |
| Material | Self-extinguishing polyamide |

① UL/CSA certification obtained with 415VAC maximum.

| TYPE | DCRL 3 | DCRL 5 | DCRL 8 | DCRG 8 / DCRG 8IND |
|--|---|---------------------------------------|--|---------------------------------------|
| AUXILIARY SUPPLY CIRCUIT | | | | |
| Rated supply voltage (Us) | 100...440VAC | | 100...415VAC | |
| Operating range | 90...484VAC | | 90...456VAC | |
| Rated frequency | 50Hz; 60Hz | | 50Hz; 60Hz | |
| Maximum power consumption | 9.5VA | | 7VA | 27VA |
| Maximum power dissipation (excluding power dissipation from the output contacts) | 3.5W | | 2.5W | 105W |
| VOLTAGE CIRCUIT | | | | |
| Control voltage | 100...600VAC L-L; 100...346VAC L-N | | 100...600VAC L-L; 100...346VAC L-N | |
| Operating range | 50...720VAC L-L; 50...415VAC L-N | | 50...720VAC L-L; 50...415VAC L-N | |
| Frequency range | 45...65Hz | | 46...65Hz; 360...440Hz | |
| Immunity time for microbreaking | <25ms | | 35ms (110VAC) - 80ms (220...415VAC) | |
| No-voltage relay release | ≥8ms | | ≥8ms | |
| CURRENT CIRCUIT | | | | |
| Rated current Ie | Programmable 5A or 1A | | | |
| Operating range | 0.025...6A for 5A full scale; 0.025...1.2A for 1A full scale | | | |
| Constant overload | 1.2Ie | | | |
| Overload peak | 50A for 1 second | | | |
| Power consumption | 0.6VA | | | |
| MEASUREMENT DATA | | | | |
| Type of voltage and current measurement | True RMS value | | | |
| Power factor adjustment | 0.5ind...0.5cap. | | | |
| Type of temperature sensor type | Internal | | Internal + PT100 with EXP10 04 + NTC with EXP10 16 | |
| Temperature measurement range | 0...+212°C | | 0...+212°C | |
| RELAY OUTPUTS | | | | |
| Number of outputs | 3/5/8 (up to 14 with EXP10 06 - EXP10 07) | | 8 (up to 18 with EXP10 06 - EXP10 07) | |
| Contact arrangement | 2/4/7 NO contacts + 1 changeover | | 7 NO contacts + 1 changeover | |
| IEC rated current | 5A 250V AC1 | | 5A 250V AC1 | |
| Maximum current at common contact terminal | 10A | | | |
| Maximum switching voltage | 415VAC | | | |
| IEC/EN 60947-5-1 and UL/CSA designation | B300 | | | |
| Electrical life with rated load | 10 ⁵ cycles | | | |
| Mechanical life | 30x10 ⁶ cycles | | | |
| STATIC OUTPUTS | | | | |
| Number of outputs | — | | 4 or 8 with EXP10 01 | |
| INSULATION | | | | |
| Rated insulation voltage Ui | 600VAC | | | |
| Rated impulse withstand voltage Uimp | 9.5kV | | | |
| Power frequency withstand voltage | 5.2kV | | | |
| CONNECTIONS | | | | |
| Type of terminal | Removable | | | |
| Conductor section min...max | 0.2...2.5mm ² (24...12 AWG; 18...12 AWG according to UL) | | | |
| AMBIENT CONDITIONS | | | | |
| Operating temperature | -20...+60°C | | -20...+70°C | |
| Storage temperature | -30...+80°C | | -30...+80°C | |
| HOUSING | | | | |
| Version | Flush-mount 96x96mm (3.78x3.78") | Flush-mount 144x144mm (5.67x5.67") | Flush-mount 144x144mm (5.67x5.67") | Flush-mount 144x144mm (5.67x5.67") |
| Material | Polycarbonate | | Polycarbonate | |
| IEC degree of protection | IP54 | | IP65 | |

Automatic power factor controllers and thyristor modules

Technical characteristics

Thyristor modules DCTM3...

| TYPE | DCTM3 400 30 | DCTM3 400 50 | DCTM3 400 100 |
|------------------------------|--|---|---|
| VOLTAGE CIRCUIT | | | |
| Rated auxiliary voltage (Us) | 400...480VAC ±10% | 400...525VAC ±10% | 400...525VAC ±10% |
| Rated current Ie | 43A | 72A | 144A |
| Step power at 400 VAC | 30kvar | 50kvar | 100kvar |
| Maximum inverse voltage | 2200VAC | 2800VAC | 2800VAC |
| Number of controlled phases | 2 | 2 | 2 |
| Auxiliary voltage | 230VAC ±10% | 230VAC ±10% | 230VAC ±10% |
| Fan supply | — | — | 230VAC ±10% |
| Maximum power consumption | 9VA | | |
| Control circuit | 8...30VDC (2mA at 12VDC) | | |
| Over-temperature protection | Yes | | |
| Cooling system | Natural | Natural | Forced ventilation |
| IEC degree of protection | IP10 | | |
| AMBIENT CONDITIONS | | | |
| Operating temperature | -10...+45°C (Ie<50A) -10...+50°C (Ie<48A) -10...+55°C (Ie<46A) | -10...+45°C (Ie<100A) -10...+50°C (Ie<90A) -10...+55°C (Ie<85A) | -10...+45°C (Ie<190A) -10...+50°C (Ie<180A) -10...+55°C (Ie<170A) |
| Storage temperature | -30...+80°C | | |
| Altitude | 1000 m with no derating; higher up derating 10%/1000m up to 4000m | | |
| HOUSING | | | |
| Material | Metal | | |

HELSINKI

tel. +358 9 540 4940
info@klinkmann.fi

ST. PETERSBURG

tel. +7 812 327 3752
klinkmann@klinkmann.spb.ru

MOSCOW

tel. +7 495 641 1616
moscow@klinkmann.spb.ru

YEKATERINBURG

tel. +7 343 287 19 19
yekaterinburg@klinkmann.spb.ru

SAMARA

tel. +7 846 273 95 85
samara@klinkmann.spb.ru

UFA

tel. +7 347 293 70 04
klinkmann@klinkmann.ru



www.klinkmann.com

KIEV

tel. +38 044 495 33 40
klinkmann@klinkmann.kiev.ua

KAZAKHSTAN

tel. +7779994825
sales@klinkmann.kz

MINSK

tel. +375 17 200 0876
minsk@klinkmann.com

RIGA

tel. +371 6738 1617
klinkmann@klinkmann.lv

VILNIUS

tel. +370 5 215 1646
post@klinkmann.lt

TALLINN

tel. +372 668 4500
klinkmann.est@klinkmann.ee