



V9 (Under Voltage Release for NB1, NBH8, NB1L, NBH8LE)

1. General

1.1 Protection of the load in the event of a voltage drop (between 70% and 35% of its rated value)


1.2 Positive safety (device's tripping when the voltage is disconnected) emergency stop by means of a button.

1.3 To be mounted on the left side of the MCBs/RCBOs thanks to the special pin.

2. Technical data

	Standard		IEC/EN 60947-5-1
Electrical features	Rated voltage U_s	V	AC230 50/60Hz
	Optional voltage of release		70-35% U_e , reliable operation
			<35% U_e , prevent breaker from making
			85~110% U_e , reliable operation
	Rated impulse withstand voltage (1.2/50) U_{imp}	V	4,000
	Dielectric TEST voltage at ind. Freq. for 1min	kV	2
	Insulation voltage U_i	V	500
Pollution degree		2	
Mechanical features	Electrical life		4,000
	Mechanical life		4,000
	Protection degree		IP20
	Ambient temperature (with daily average $\leq 35^\circ\text{C}$)	$^\circ\text{C}$	-5...+40
	Storage temperature	$^\circ\text{C}$	-25...+70
Installation	Terminal connection type		Cable
	Terminal size top/bottom for cable	mm ²	2.5
		AWG	18-14
	Tightening torque	N·m	0.8
In-lbs.		7	

3. Overall and mounting dimensions (mm)

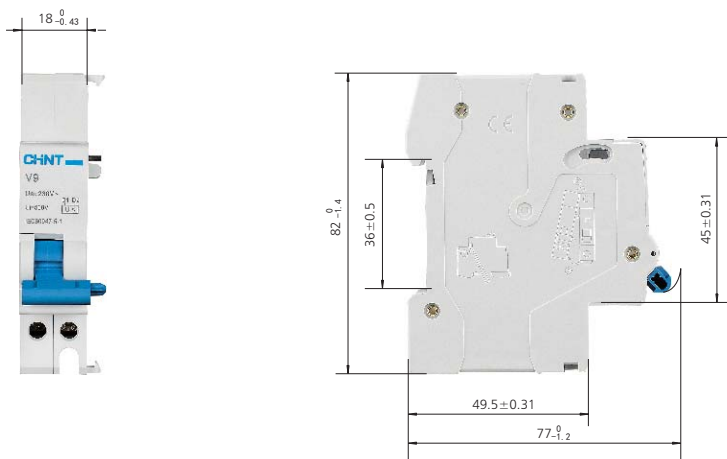

KLINKMANN

Helsinki
tel. +358 9 540 4940
info@klinkmann.fi

St. Petersburg
tel. +7 812 327 3752
klinkmann@klinkmann.spb.ru

Moscow
tel. +7 495 641 1616
moscow@klinkmann.spb.ru

Yekaterinburg
tel. +7 343 287 19 19
yekaterinburg@klinkmann.spb.ru

Samara
tel. +7 846 273 95 85
samara@klinkmann.spb.ru

Kiev
tel. +38 044 495 33 40
klinkmann@klinkmann.kiev.ua

Riga
tel. +371 6738 1617
klinkmann@klinkmann.lv

Vilnius
tel. +370 5 215 1646
post@klinkmann.lt

Tallinn
tel. +372 668 4500
klinkmann.est@klinkmann.ee

Minsk
tel. +375 17 200 0876
minsk@klinkmann.com