



---

# HAND-HELD ENCLOSURES

---



A Phoenix Mecano Company



## ROSE Systemtechnik GmbH

The company was founded in 1969 and specializes in the development and production of high quality industrial enclosures, which are used in a variety of environmental conditions.

Phoenix Mecano AG / Switzerland is a global company.

The basis of our business success are systems from a wide range of high quality products, innovative design and first class customer service.

For more informations please visit our homepage

[www.rose-pw.de](http://www.rose-pw.de) [www.rose-ex-enclosures.com](http://www.rose-ex-enclosures.com)



A Phoenix Mecano Company

ROSE Systemtechnik GmbH  
Erbeweg 13 - 15  
32457 Porta Westfalica  
Fon +49 571 5041 0  
Fax +49 571 5041 6  
E-Mail [rose@rose-pw.de](mailto:rose@rose-pw.de)  
Web [www.rose-pw.de](http://www.rose-pw.de)



# Contents

	Page
	<b>Taguan 130</b> ABS hand held enclosure for data acquisition and instrumentation 5 - 8
	<b>Taguan 180/230</b> ABS hand held enclosure for data acquisition and instrumentation 9 - 16
	<b>Beluga 180/220</b> Polyamide hand held enclosure for MCR- and automation engineering 17 - 22
	<b>Beluga 380</b> Polyamide hand held enclosure for MCR- and automation engineering 23 - 26
	<b>Norvent</b> Design plastic enclosure for communication and automation engineering 27 - 30
	<b>Pilot 250</b> Polyamide hand held enclosure for MCR- and automation engineering 31 - 34
	<b>Pilot 50</b> Polyamide/PVC hand held enclosure for MCR- and automation engineering 35 - 38
	<b>Pilot 10/20/30</b> Hand held enclosure for MCR- and automation engineering 39 - 42
	<b>Pilot 110-150</b> Polyamide hand held enclosure for automation and control engineering 43 - 46
	<b>Limanda</b> Polyamide hand held enclosure for data acquisition, MCR- and automation engineering 47 - 52
	<b>Electro-mechanical components</b> 53 - 58
	<b>General technical informations</b> 59 - 63
	Technical modifications reserve!



- ABS hand held enclosure for data acquisition and measurement
- With integrated battery compartment
- Version with or without display opening
- Optional EMC version with internal coating

### Technical data

**Material:**

ABS

**Ingress protection:**

IP 40 to EN 60529

**Surface resistance:**

4 x 10<sup>14</sup> Ohm, IEC 60093

**Flammability:**

UL 94 HB

**Colour:**

top and base, battery compartment cover, head/shaft panel: RAL 5020, ocean blue

keyboard cover, battery compartment/battery pack: RAL 7024, graphite grey

**Temperature range:**

-40°C to +80°C

#### Included in delivery

5-part enclosure with top and base, battery compartment, battery compartment cover, head and shaft cover, fixing and enclosure screws. Open version incl. display screen and punched seal.

# Taguan 130

## Product range

Type	Order No.	Version	Dimensions W x L x H (mm)	Weight (g)
Taguan 130 FO	<b>27.01 02 00</b>	flat, open	80/70 x 125 x 36,7 / 28,5	130
Taguan 130 FG	<b>27.01 02 01</b>	flat, closed	80/70 x 125 x 36,7 / 28,5	110
Taguan 130 TO	<b>27.01 02 10</b>	deep, open	80/70 x 125 x 46,7 / 28,5	123
Taguan 130 TG	<b>27.01 02 11</b>	deep, closed	80/70 x 125 x 46,7 / 28,5	140



### Electromechanical and electronic components

Upon request we can supply enclosures ready equipped with electromechanical and electronic components such as display, chipcard-acceptor, interface modules etc.

## Accessories

Battery holder for 4 micro-cells (AAA)	<b>27.01 02 80</b>
Battery holder for 9 V monobloc	<b>27.01 02 81</b>
Clip	<b>27.01 02 82</b>
Keypad FT 130b, 12 keys, printed (common connection)	<b>82.10 00 01</b>
Keypad FT 130e, 12 keys, with insert (matrix)	<b>82.10 00 02</b>
Connector 13-pole	<b>82.20 00 13</b>
Shaft cover in enclosure colour	<b>27.01 02 85</b>
Shaft cover transparent	<b>27.01 02 86</b>
Shaft cover for infrared	<b>27.01 02 87</b>
Spare display screen set	<b>27.01 02 88</b>
Spare screw set	<b>27.01 00 90</b>
Scratch resistant display screen	on request
Push-button and switches see page 53 - 58	

## Component mounting options

Component options	Type T130 FO	Type T130 FG	Type T130 TO	Type T130 TG
Display max. view area 45 x 17,4 mm max. mounting dimensions 65 x 29 mm	•		•	
Chipcard reader in head section	•	•	•	•
Scanner	•	•	•	•
PCMCIA slot	•	•	•	•
D-Sub interface 9-pin	•	•	•	•
D-Sub interface 15-pin	•	•	•	•
9 V monobloc	•	•	•	•
4 R3 micro-cells (AAA)	•	•	•	•
1. PCB (main board)	•	•	•	•
2. PCB (adapter board)	•	•	•	•
Membrane keypad	•	•	•	•





Dimensions



Type	Version	Order No.
Taguan 130 FO	flat, open	<b>27.01 02 00</b>
Taguan 130 FG	flat, closed	<b>27.01 02 01</b>

(max. PCB size of displays ca. 65 x 29 mm)





\* = Open version  
\*\* = PCB mounting boss (screw 2.5 x 5)

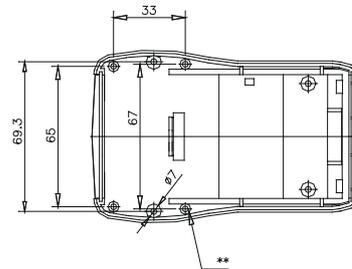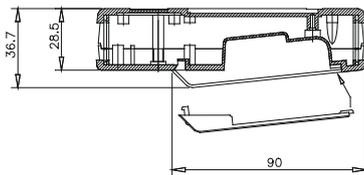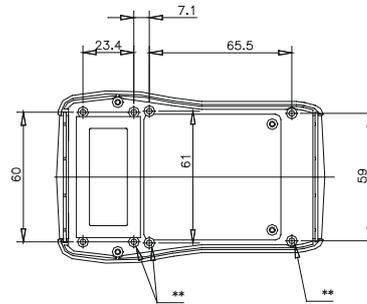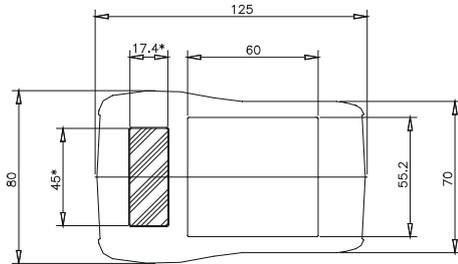

Type	Version	Order No.
Taguan 130 TO	deep, open	<b>27.01 02 10</b>
Taguan 130 TG	deep, closed	<b>27.01 02 11</b>

(max. PCB size of displays ca. 65 x 29 mm)

\* = Open version  
\*\* = PCB mounting boss (screw 2.5 x 5)

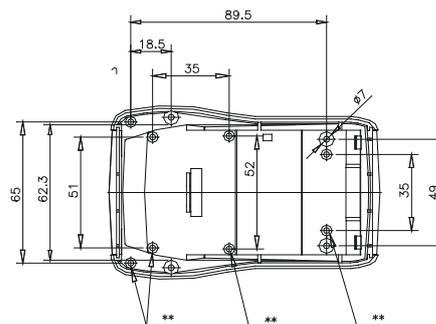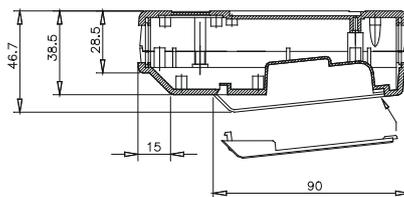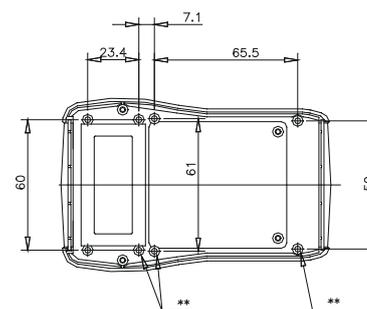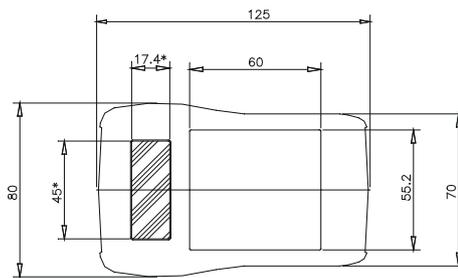

# Taguan 130



## Accessories



**Cover**  
for use as head or shaft cover

Version	Order No.
in enclosure colour	<b>27.01 02 85</b>
transparent	<b>27.01 02 86</b>
for infrared	<b>27.01 02 87</b>


Units per pack: 1 pc

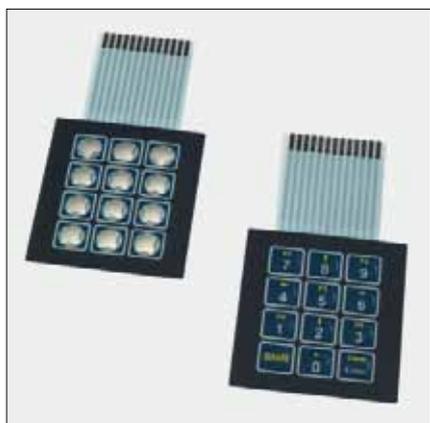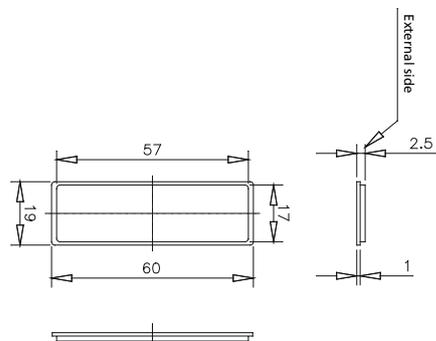

**Keypads**  
12 keys, printed version or plain with insertion facility for custom inscription

Type	Version	Order No.
FT 130b	12 keys, printed (common connection)	<b>82.10 00 01</b>
FT 130e	12 keys, with insert (matrix)	<b>82.10 00 02</b>
	Connector 13-pole	<b>82.20 00 13</b>

Customized keypads on request.

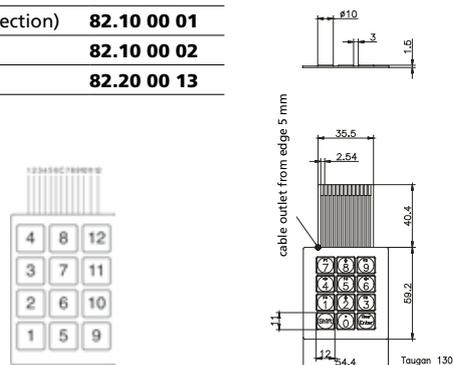

**Clip**  
Metal clip to snap onto battery compartment lid  
Order No. **27.01 02 82**



**Battery holder**  
for mounting in the bottom part, for 4 micro-cells (AAA) side by side or connection contact for 9 V monobloc

Version	Order No.
for 4 micro-cells (AAA)	<b>27.01 02 80</b>
for 9 V monobloc	<b>27.01 02 81</b>



- ABS hand held enclosure for data acquisition and measurement
- With integrated battery compartment
- Version with or without display openings
- Optional EMC version with internal coating

### Technical data

**Material:**

ABS

**Ingress protection:**

IP 40 to EN 60529

**Surface resistance:**

$4 \times 10^{14}$  Ohm, IEC 60093

**Flammability:**

UL 94 HB

**Colour:**

top and base, battery compartment cover, head/shaft cover: RAL 5020, ocean blue

keyboard cover, battery compartment/battery pack: RAL 7024, graphite grey

**Temperature range:**

-40°C to +80°C

#### Included in delivery

Enclosure with top and base, keyboard cover, head and shaft cover, fastening and enclosure screws. Open version incl. display screen and punched seal.  
Please order battery compartment separately.

# Taguan 180/230

## Product range

Type	Order No.	Version	Dimensions W x L x H (mm)	Weight (g)
Taguan 180 O	<b>27.01 04 00</b>	open	84/70 x 180 x 52,5/37,5	140
Taguan 180 G	<b>27.01 04 01</b>	closed	84/70 x 180 x 52,5/37,5	170
Taguan 230 O	<b>27.01 06 00</b>	open	97/70 x 229 x 52,5/37,5	230
Taguan 230 G	<b>27.01 06 01</b>	closed	97/70 x 229 x 52,5/37,5	400



**Electromechanical and electronic components**  
Upon request we can supply enclosures ready equipped with electromechanical and electronic components such as display, chipcard-acceptor, interface modules etc.

## Accessories

Battery holder 9 V monobloc	<b>27.01 00 94</b>	Hand strap (T 180)	<b>27.01 04 84</b>
Shaft cover in enclosure colour	<b>27.01 02 85</b>	Hand strap (T 230)	<b>27.01 06 84</b>
Shaft cover transparent	<b>27.01 02 86</b>	Spare display screen set (T 180)	<b>27.01 04 88</b>
Shaft cover for infrared	<b>27.01 02 87</b>	Spare display screen set (T 230)	<b>27.01 06 88</b>
Battery compartment empty, 30 g	<b>27.01 00 80</b>	Spare screws set	<b>27.01 00 90</b>
Rechargeable battery pack NiMH 4.8 V / 2100 mAh	<b>27.20 00 03</b>	Head cover, stepped, in enclosure colour	<b>27.01 00 85</b>
Connector charger	<b>27.20 00 02</b>	Head cover, stepped, for infrared	<b>27.01 00 87</b>
Battery charging station	<b>27.20 00 01</b>	Head cover, stepped, transparent	<b>27.01 00 89</b>
Spring contact, 2-pole	<b>27.01 00 82</b>	Head cover, straight, in enclosure colour	<b>27.01 00 91</b>
Wrist strap	<b>27.01 00 83</b>	Head cover, straight, transparent	<b>27.01 00 92</b>
Display fixing set (T 180)	<b>27.01 04 80</b>	Head cover, straight, for infrared	<b>27.01 00 93</b>
Display fixing set (T 230)	<b>27.01 06 80</b>	Scratch resistant display screen	auf Anfrage
Switch mat set 12 keys	<b>27.01 00 95</b>	Push-button and switches see page 53 - 58	
Switch mat set 24 keys (T 180)	<b>27.01 04 81</b>		
Switch mat set 36 keys (T 230)	<b>27.01 06 81</b>		

## Components mounting options

Component options	Type T180 O	Type T180 G	Type T230 O	Type T230 G
Display (max. view area 56 x 33 mm; max. mounting dimensions 66 x 46 mm) •				
Display (max. view area 66 x 43 mm; max. mounting dimensions 78 x 56 mm)			•	
Chipcard reader in head section	•	•	•	•
Chipcard reader in shaft section	•	•	•	•
Magnetic card reader	•	•	•	•
Scanner	•	•	•	•
PCMCIA slot	•	•	•	•
D-Sub interface 9-pin	•	•	•	•
D-Sub interface 15-pin	•	•	•	•
D-Sub interface 25-pin	•	•	•	•
Battery pack	•	•	•	•
4 micro-cells R6 (AA)	•	•	•	•
9 V monobloc	•	•	•	•
1st board (main board)	•	•	•	•
2nd board (adapter board)	•	•	•	•
Membrane keypad	•	•	•	•
Switching mat, 12 keys, in combination with keypad plate	•	•	•	•
Switching mat, 24 keys	•	•		
Switching mat, 36 keys			•	•





Abmessungen



Type	Version	Order No.
Taguan 180 O	open	<b>27.01 04 00</b>
Taguan 180 G	closed	<b>27.01 04 01</b>

(max. PCB size of displays ca. 66 x 46 mm)





\* = Open version  
\*\* = PCB mounting boss (screw 2.5 x 5)

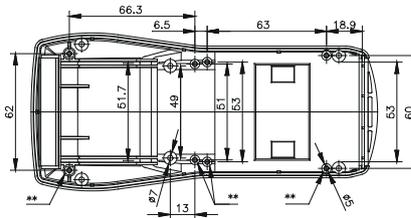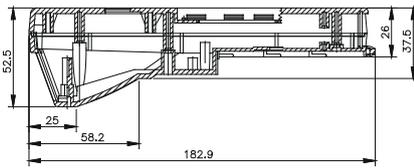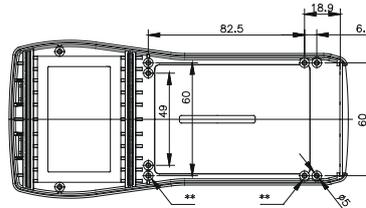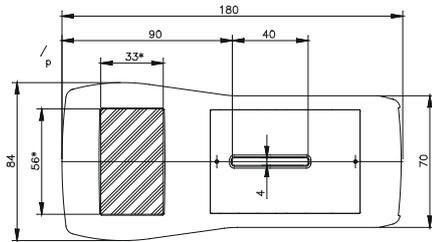

Type	Version	Order No.
Taguan 230 O	open	<b>27.01 06 00</b>
Taguan 230 G	closed	<b>27.01 06 01</b>

(max. PCB size of displays ca. 78 x 56 mm)

\* = Open version  
\*\* = PCB mounting boss (screw 2.5 x 5)

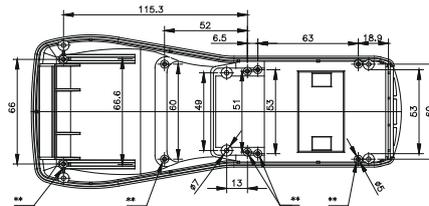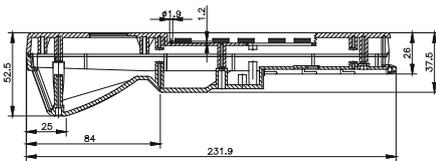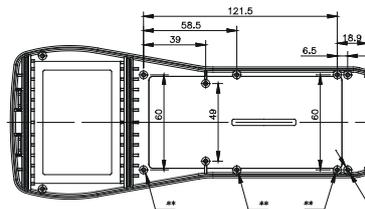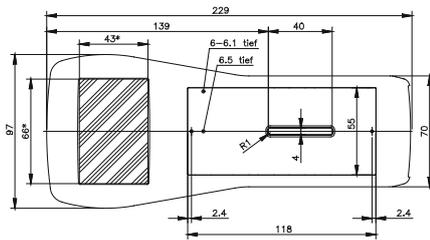


## Accessories




**Battery compartment empty**  
consisting of battery compartment and lid space for 4 micro-cells R6 (AA) side by side

Order No. **27.01 00 80**

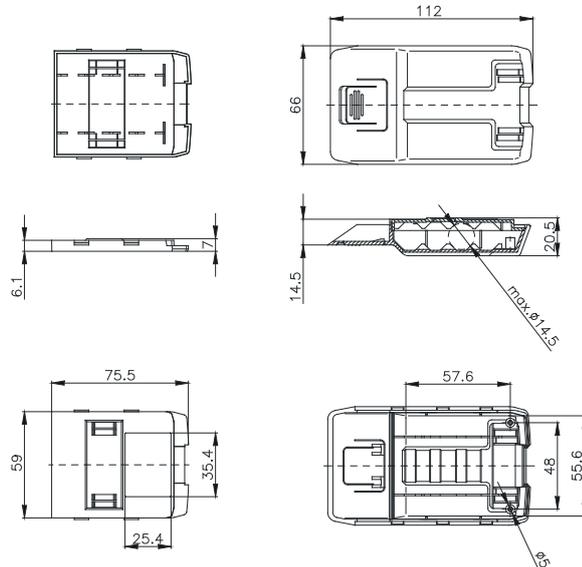

**Rechargeable battery pack**  
NiMH 4.8 V / 2100 mAh

Order No. **27.20 00 03**

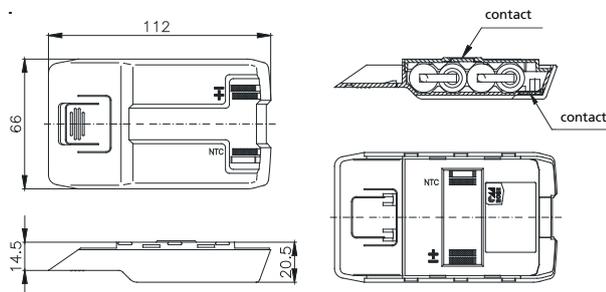

**Battery holder**  
for mounting in the bottom part for 9 V monobloc



Order No. **27.01 00 94**

Accessories




**Connector charger**  
with primary adapter

Order No. **27.20 00 02**

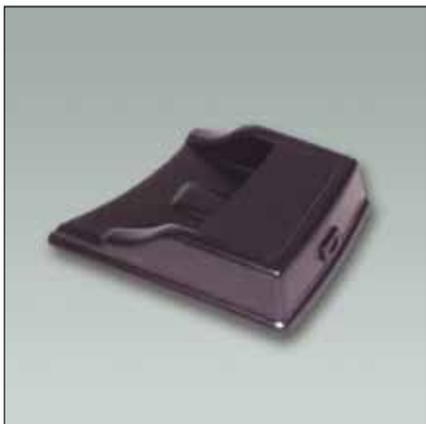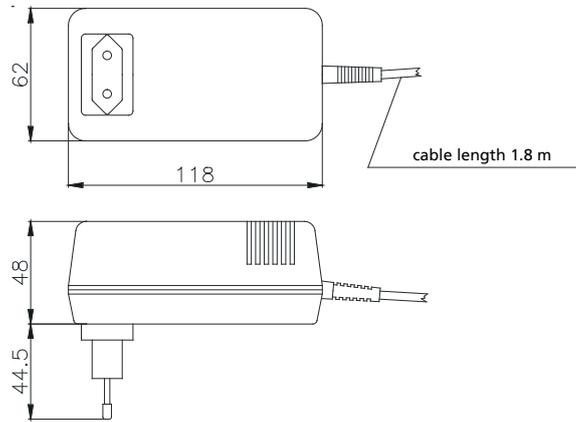

**Battery charging station**

Order No. **27.20 00 01**

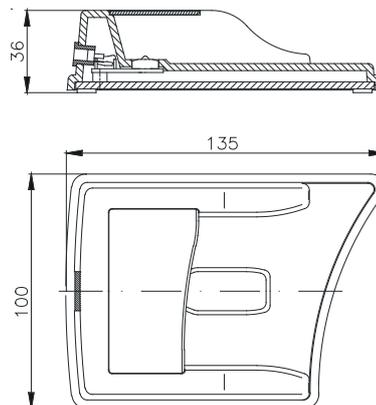


## Accessories



### Spring contact 2-pole

Counter-contacts for the battery pack (Company Bourns, type 70ADJ002ML1), for mounting in enclosure bottom part

Order No. **27.01 00 82**

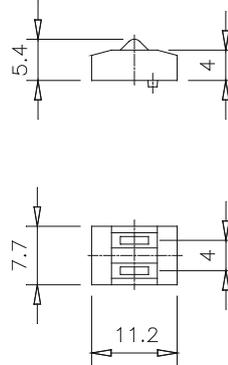


### Head cover


Version	Order No.
stepped in enclosure colour	<b>27.01 00 85</b>
stepped transparent	<b>27.01 00 89</b>
stepped for infrared	<b>27.01 00 87</b>
straight in enclosure colour	<b>27.01 00 91</b>
straight transparent	<b>27.01 00 92</b>
straight for infrared	<b>27.01 00 93</b>

units per pack: 1 pc

even

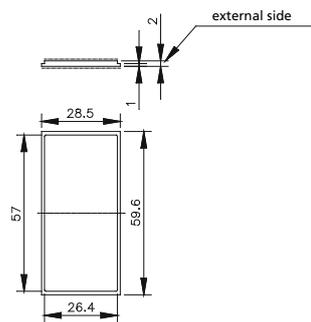

stepped

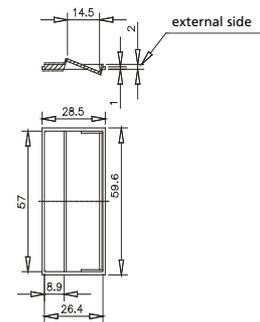


Accessories



Shaft cover

Version	Order No.
in enclosure colour	<b>27.01 02 85</b>
transparent	<b>27.01 02 86</b>
for infrared	<b>27.01 02 87</b>

units per pack: 1 pc

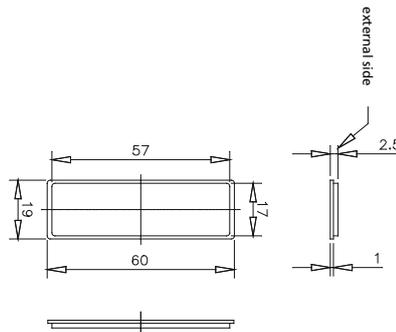


Switch mat set

consisting of keypad plate, silicone switching mat and keypad circuit board with connecting cable

for type	No. of keys	Order No.
Taguan 180/230	12*/**	<b>27.01 00 95</b>
Taguan 180	24**	<b>27.01 04 81</b>
Taguan 230	36	<b>27.01 06 81</b>

\* Please remember the modification of the toppart for the flat cable  
 \*\* Please not different heights by combination with closed cover

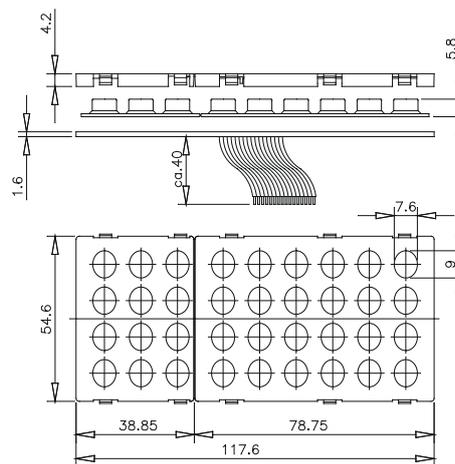

# Taguan 180/230

## Accessories



**Display fixing set**  
for variable display mounting

Version for	Order No.
Taguan 180	<b>27.01 04 80</b>
Taguan 230	<b>27.01 06 80</b>



**Hand strap**  
with Velcro fastener for adjustment, consisting of holding strap, adapter and screws

Version for	Order No.
Taguan 180	<b>27.01 04 84</b>
Taguan 230	<b>27.01 06 84</b>



**Wrist strap**  
to prevent falling down, or as carrying aid

Order No. **27.01 00 83**



- Polyamide hand held enclosure for MCR- and automation engineering
- Version with or without display opening
- Prepared for acceptance of keypads/silicone switch mats
- Optional EMC version with internal coating and EMC seal

#### Included in delivery

Double-skinned enclosure with top and base unit, each with fixing domes, fastening and enclosure screws.  
Open version incl. display screen and punched seal.

#### Technical data

**Material:**

Polyamide

**Ingress protection:**

IP 65 to EN 60529

**Surface resistance:**

$10^{12}$  Ohm, IEC 60093

**Flammability:**

UL 94 V-2

**Colour:**

RAL 7021, black grey

**Temperature range:**

-40°C to +60°C

# Beluga 180/220

## Product range

Type	Order No.	Version	Dimensions W x L x H (mm)	Weight (g)
Beluga 180 O	<b>27.02 02 00</b>	open	106/75 x 187 x 50	290
Beluga 180 G	<b>27.02 02 01</b>	closed	106/75 x 187 x 50	228
Beluga 220 O	<b>27.02 04 00</b>	open	116/85 x 220 x 51	262
Beluga 220 G	<b>27.02 04 01</b>	closed	116/85 x 220 x 51	254

## Accessories

Hook set without magnet	<b>27.02 00 80</b>
Hook set with magnet	<b>27.02 00 81</b>
Keypad FT 180b, 15 keys, printed (Matrix) (B 180)	<b>82.10 00 03</b>
Keypad FT 180e, 15 keys, with insert (Matrix) (B 180)	<b>82.10 00 04</b>
Keypad FT 220b, 18 keys, printed (Matrix) (B 220)	<b>82.10 00 05</b>
Keypad FT 220e, 18 keys, with insert (Matrix) (B 220)	<b>82.10 00 06</b>
Keypad FT 180ge, 12 keys, with insert (common connection) (B 180)	<b>82.10 00 07</b>
Connector (B 180)	<b>82.20 00 08</b>
Connector (B 220)	<b>82.20 00 09</b>
Display fixing set (B 180)	<b>27.01 06 80</b>
Display fixing set (B 220)	<b>27.02 04 82</b>
Cable gland with bending protection M 16 x 1,5	<b>08.10 01 16</b>
Cable gland with bending protection M 20 x 1,5	<b>08.10 01 20</b>
Hand strap	<b>27.02 00 83</b>
Spare screw set	<b>27.02 00 82</b>
Spare display screen set (B 180)	<b>27.01 06 88</b>
Spare display screen set (B 220)	<b>27.02 04 83</b>
Battery compartment without contacts	<b>27.02 00 85</b>
Battery holder for 4 round cells for battery compartment	<b>27.02 00 86</b>
Battery holder for 9 V monobloc for battery compartment	<b>27.02 00 87</b>
Wall holder set (B 180/220)	<b>27.02 00 84</b>
Enabling switch 2-step, blue	<b>83.50 00 10</b>
Scratch resistant display screen	on request
Push-button and switches see page 53 - 58	



### Electromechanical components

On request, we offer the enclosures ready equipped with electromechanical components such as emergency stop button, confirm keys, hand wheel, step switch, display.

## Components mounting options


Component options	Type B180 O	Type B180 G	Type B220 O	Type B220 G
Display max. view area 42 x 65 mm max. mounting dimensions 56,4 x 74 mm or 54 x 80 mm	•			
Display max. view area 49 x 78 mm max. mounting dimensions 71,5 x 84 mm or 70,5 x 86 mm			•	
Emergency stop button	•	•	•	•
Confirm key	•	•	•	•
Hand wheel		•		•
Step switch		•		•
Joy stick	•		•	
Cable outlet up to M 16	•	•	•	•
Cable outlet up to M 20			•	•
1st board (main board)	•	•	•	•
Other boards	•	•	•	•

Dimensions



Type	Version	Order No.
Beluga 180 O	open	<b>27.02 02 00</b>
Beluga 180 G	closed	<b>27.02 02 01</b>

(max. PCB size of displays ca. 74 x 56,4 mm or 80 x 54 mm)

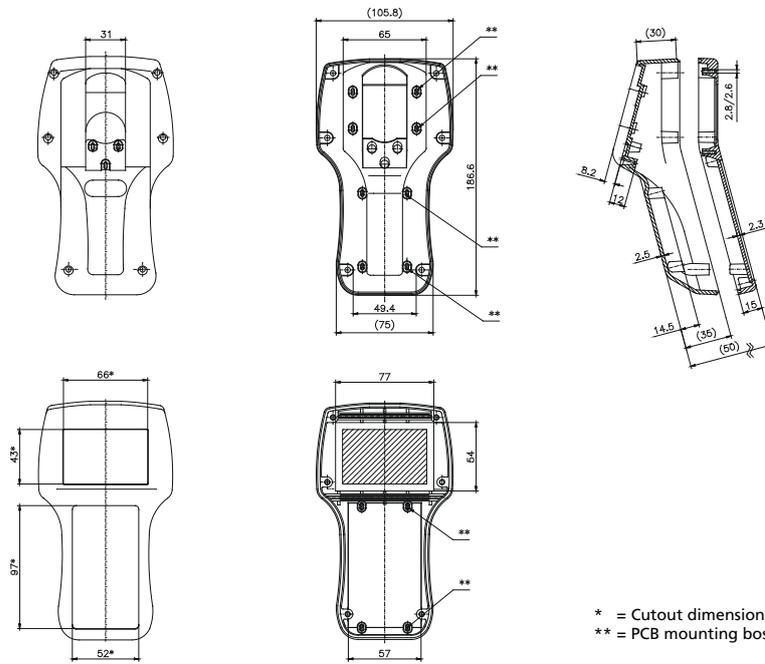


\* = Cutout dimension  
 \*\* = PCB mounting boss (screw 3 x 8)



Type	Version	Order No.
Beluga 220 O	open	<b>27.02 04 00</b>
Beluga 220 G	closed	<b>27.02 04 01</b>

(max. PCB size of displays ca. 84 x 71,5 mm or 86 x 70,5 mm)

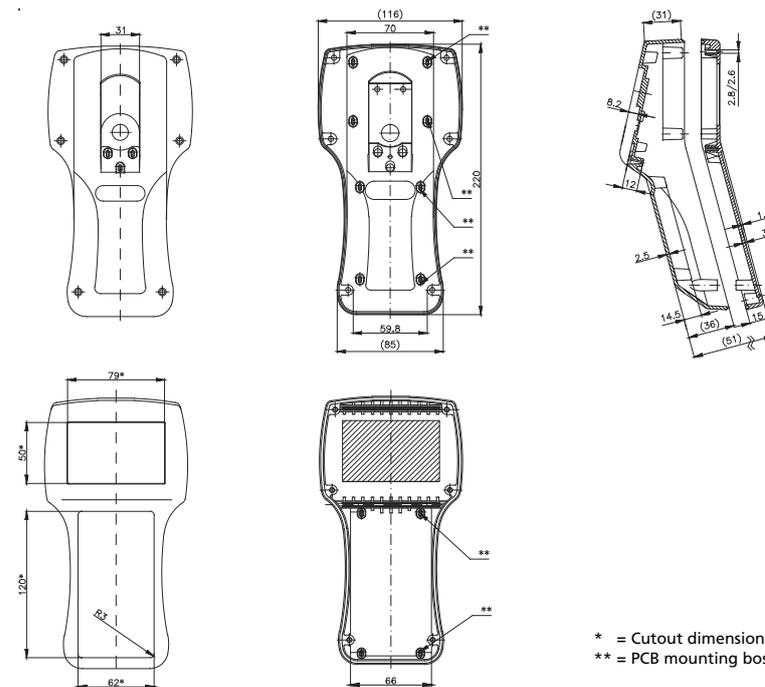

\* = Cutout dimension  
 \*\* = PCB mounting boss (screw 3 x 8)

# Beluga 180/220



## Accessories



### Keypads for Beluga 180

Standard membrane keypad with 15 keys as printed version or plain. Insertion facility for custom inscription



Type	Version	Order No.
FT 180b	15 keys, Matrix printed	<b>82.10 00 03</b>
FT 180e	15 keys, Matrix with insert	<b>82.10 00 04</b>
Connector		<b>82.20 00 08</b>

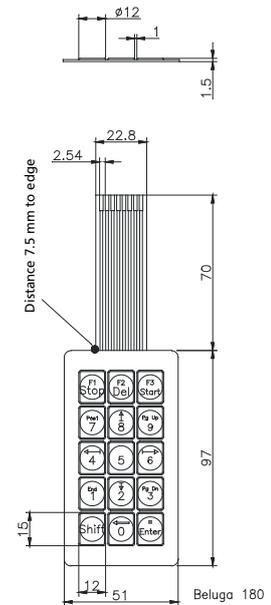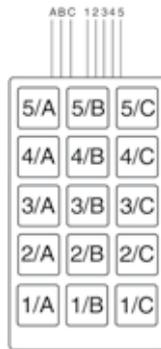


### Keypads for Beluga 220

Standard membrane keypad with 18 keys as printed version or plain. Insertion facility for custom inscription

Type	Version	Order No.
FT 220b	18 keys, Matrix printed	<b>82.10 00 05</b>
FT 220e	18 keys, Matrix with insert	<b>82.10 00 06</b>
Connector		<b>82.20 00 09</b>

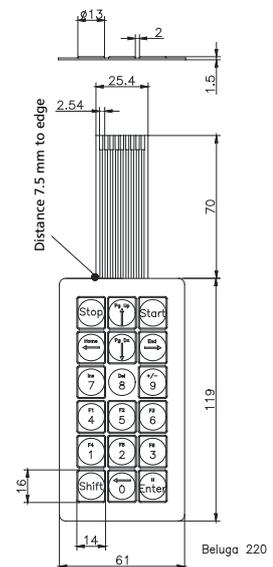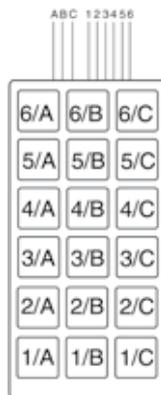


Accessories

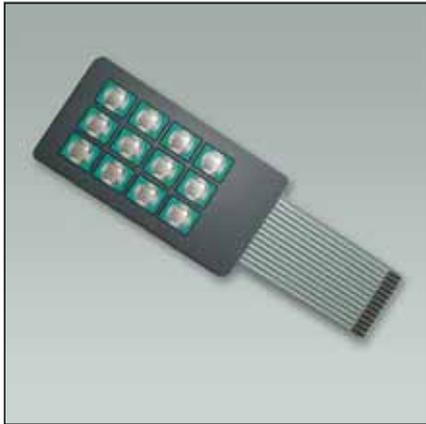

Keypads for Beluga 180

Standard membrane keypad with 12 keys as plain version. Insertion facility for custom inscription

Type	Version	Order No.
FT 180ge	12 keys, with insert (common connection)	<b>82.10 00 07</b>

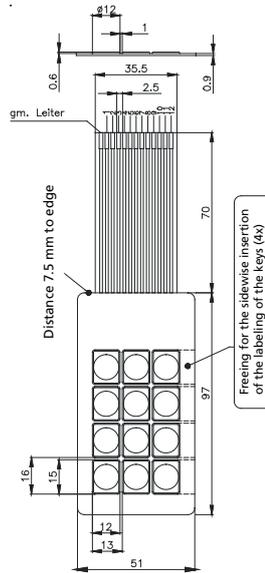

**Hook set**  
consisting of mounted hook and fixing screws

Version	Order No.
without magnet	<b>27.02 00 80</b>
with magnet	<b>27.02 00 81</b>

Adhesion by version with magnet	
plate thickness	force
2 mm	20 N
5 mm	30 N



**Display fixing set**  
for variable display mounting

Version for	Order No.
Beluga 180	<b>27.01 06 80</b>
Beluga 220	<b>27.02 04 82</b>



**Battery compartment**  
without contacts

Order No. **27.02 00 85**

Applications





- Polyamide hand held enclosure for MCR- and automation engineering
- Version with or without display opening
- Prepared for acceptance of keypads/silicone switch mats
- Optional EMC version with internal coating and EMC seal

### Technical data

**Material:**

Polyamide

**Ingress protection:**

IP 65 to EN 60529

**Surface resistance:**

$10^{12}$  Ohm, IEC 60093

**Flammability:**

UL 94 V-2

**Colour:**

RAL 7021, black grey

**Temperature range:**

-40°C to +60°C

#### Included in delivery

Double-skinned enclosure with top and base unit, each with fixing domes, mounting / hook set, fastening and enclosure screws.

# Beluga 380

## Product range

Type	Order No.	Version	Dimensions W x L x H (mm)	Weight (g)
Beluga 380	<b>27.02 05 01</b>	closed	380 x 117 x 68	670

## Accessories

Cable gland with bending protection M 16 x 1,5	<b>08.10 01 16</b>
Cable gland with bending protection M 20 x 1,5	<b>08.10 01 20</b>
Carrying strap	<b>27.02 05 80</b>
Hand strap	<b>27.02 05 81</b>
Wall holder set, stainless steel	<b>27.02 05 82</b>
Spare screw set	<b>27.02 05 83</b>
Push-button and switches see page 53 - 58	



### Wall holder set

stainless steel angle bracket set,  
+/- 45° inclination slope adjustable by means of  
knurled screws.

Order No. **27.02 05 82**



### Electromechanical components

On request, we can supply equipment fitted  
with electro-mechanical components such as  
emergency stop button, acknowledge keys,  
hand wheel, switches, display






## Component mounting options

Component options	Type B380
Display (max. view area / max. mounting dimensions see drawing on page 53 - 58)	•
Emergency stop button	•
Confirm key	•
Enabling switch	•
Hand wheel	•
Step switch	•
Joy stick	•
Cable outlet up to M 20	•
1st board (main board)	•
Other boards	•

Dimensions



Type	Version	Order No.
Beluga 380	closed	27.02 05 01

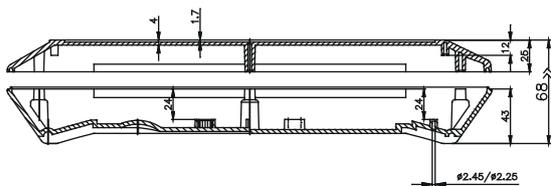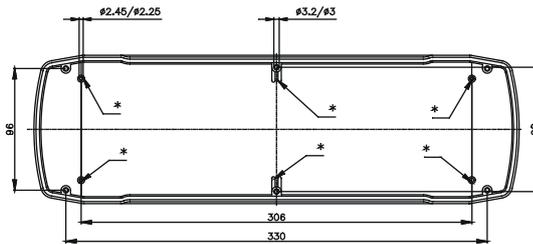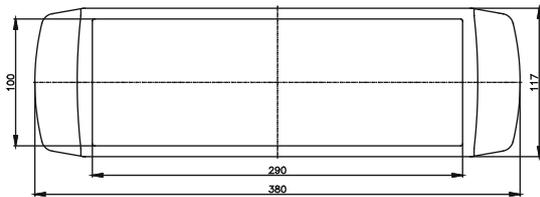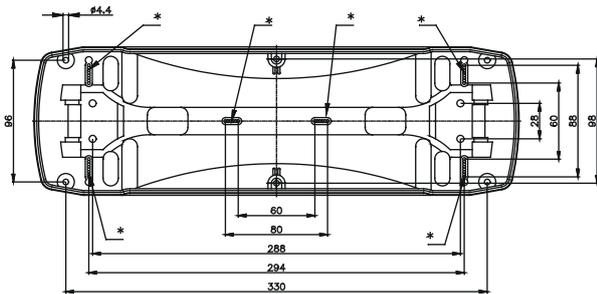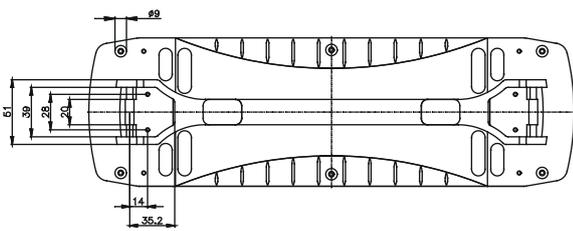

\* = PCB mounting boss (screw 3 x 8)

---

## Beluga 380

---



Large displays mounted (1/4 VGA)



Integrated hook set



Large mounting space for electronic devices



Hook set, can be used as a stand



- Design plastic enclosure for communication and automation engineering
- Optional with recess for membrane keypads
- Space for automation components

**Included in delivery**

Enclosure with top, base and side elements

**Technical data**

**Material:**

PC / ABS

**Ingress protection:**

IP 65 to EN 60529

**Colour:**


black (side part silver)

**Temperature range:**

-20°C to +60°C




Dimensions

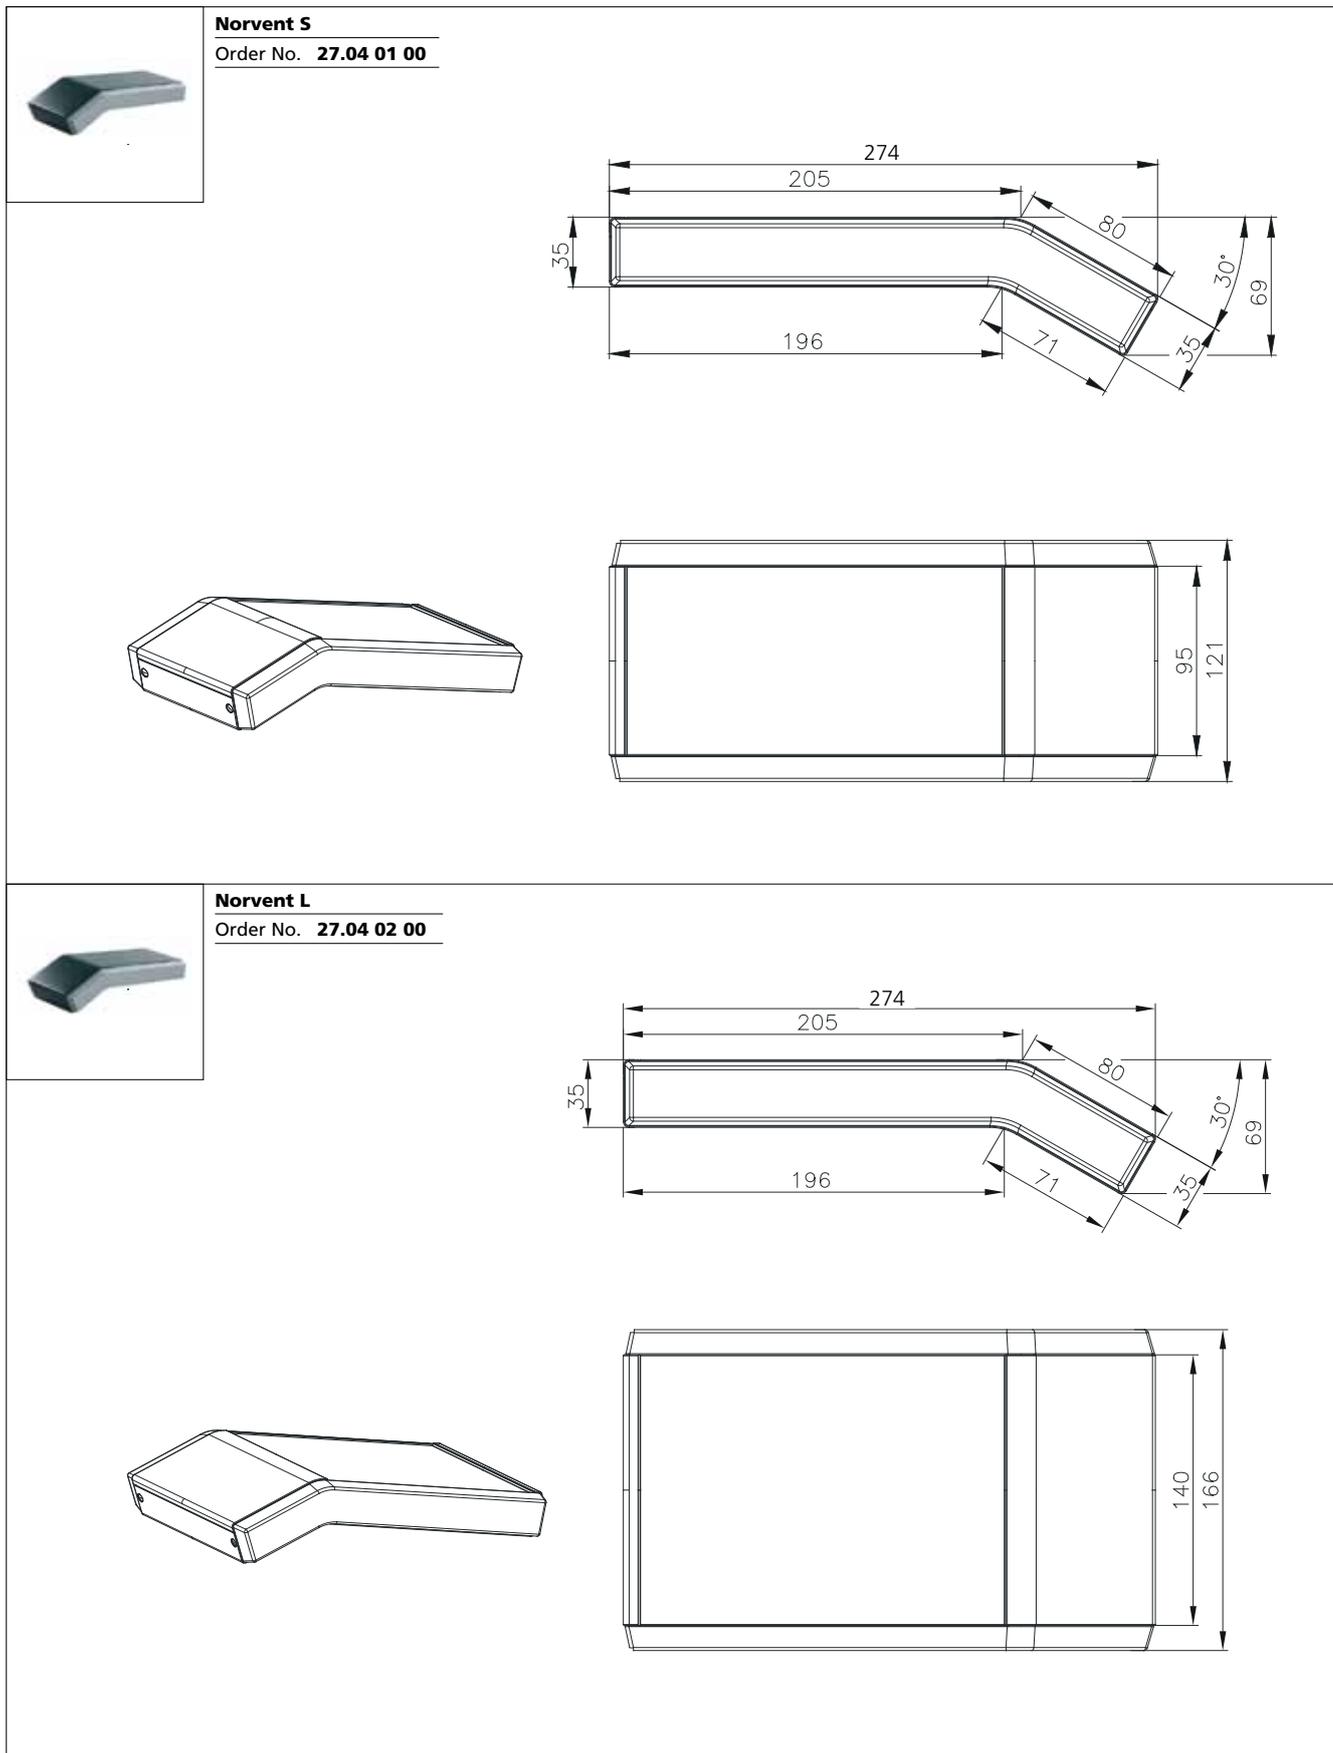

# Norvent

## Dimensions

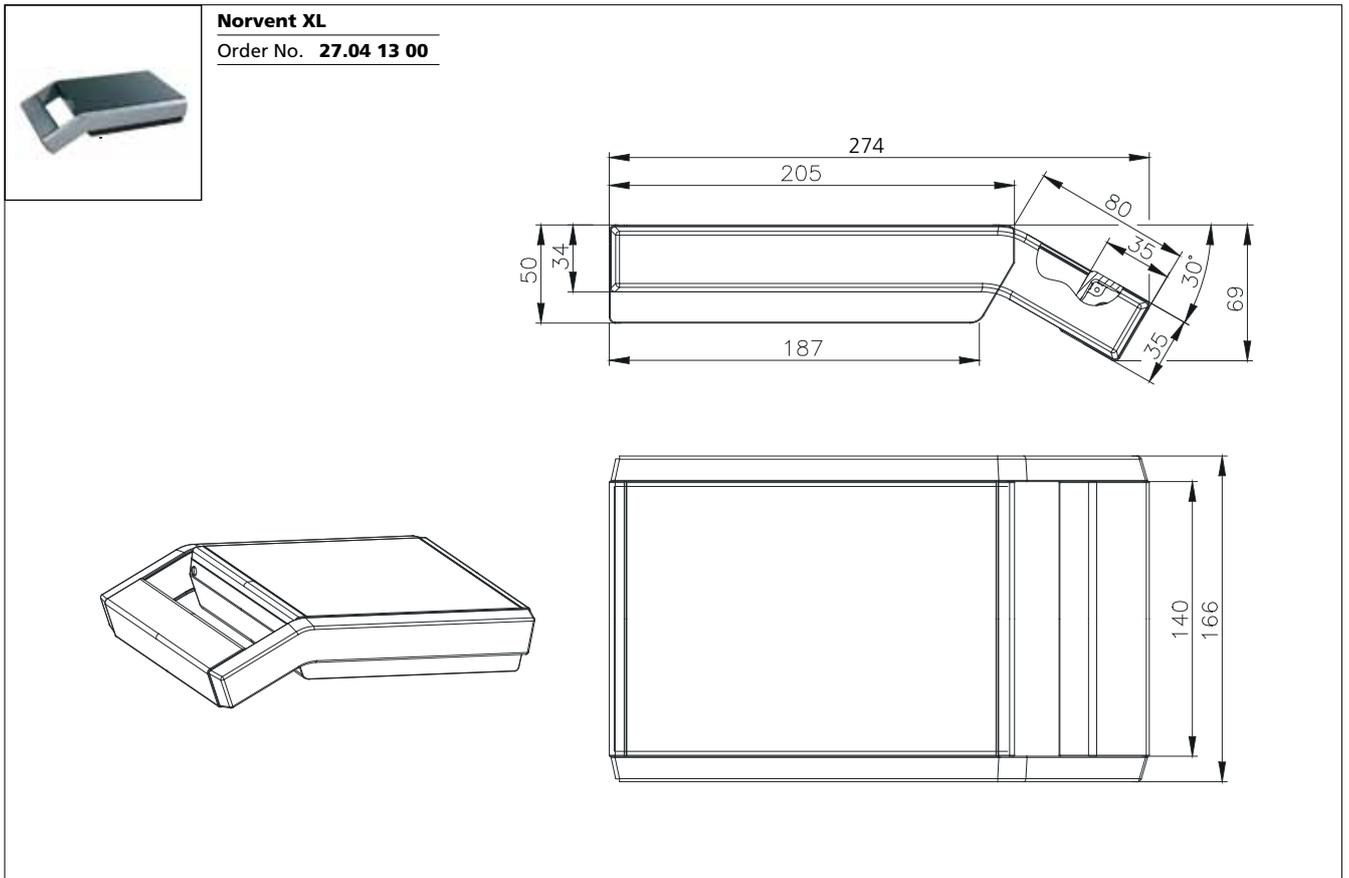



- Polyamide hand held enclosure for MCR- and automation engineering
- Version with closed or front frame lid
- Rear battery compartment
- Optional EMC version with internal coating and EMC seal

#### Included in delivery

Double-skinned enclosure with top and base unit, each with fixing domes, battery compartment lid, fastening and enclosure screws

#### Technical data

**Material:**

Polyamide

**Ingress protection:**

IP 65 to EN 60529

**Impact resistance:**

7 Joule to EN 60079-0

**Flammability:**

UL 94 HB

**Colour:**

Base and lid: RAL 7021, black grey

Rear cover: RAL 5003, sapphire blue

**Temperature range:**

-40°C to +60°C

# Pilot 250

## Product range

Type	Order No.	Version top part	Dimensions W x L x H (mm)	Weight (g)
Pilot 250/1	<b>29.25 00 01</b>	closed	140/120 x 280 x 86	700
Pilot 250/2	<b>29.25 00 02</b>	lid frame	140/120 x 280 x 86	460

## Accessories

Front panel, aluminium for Pilot 250/2	<b>29.25 01 01</b>
Magnet holder round	<b>29.25 01 02</b>
Battery holder for fixing in the enclosure base for 4 micro-cells	<b>29.25 01 03</b>
Battery holder for fixing in the enclosure base for 9V monobloc	<b>29.25 01 04</b>
Wall holder (2 hooks, 2 bolts with screws)	<b>29.25 01 05</b>
Cable gland with bending protection M 16 x 1,5	<b>08.10 01 16</b>
Cable gland with bending protection M 20 x 1,5	<b>08.10 01 20</b>
Enabling switch (3-steps)	on request



### Electromechanical components

On request, we can supply equipment fitted with electro-mechanical components such as emergency stop button, acknowledge keys, hand wheel, switches, display



### Battery holder


for fixing in enclosure base for 4 micro-cells or 9 V monobloc

Version	Order No.
for 4 micro-cells	<b>29.25 01 03</b>
for 9 V monobloc	<b>29.25 01 04</b>

Dimensions




Type	Version	Order No.
Pilot 250/1	closed	29.25 00 01
Pilot 250/2	lid frame	29.25 00 02

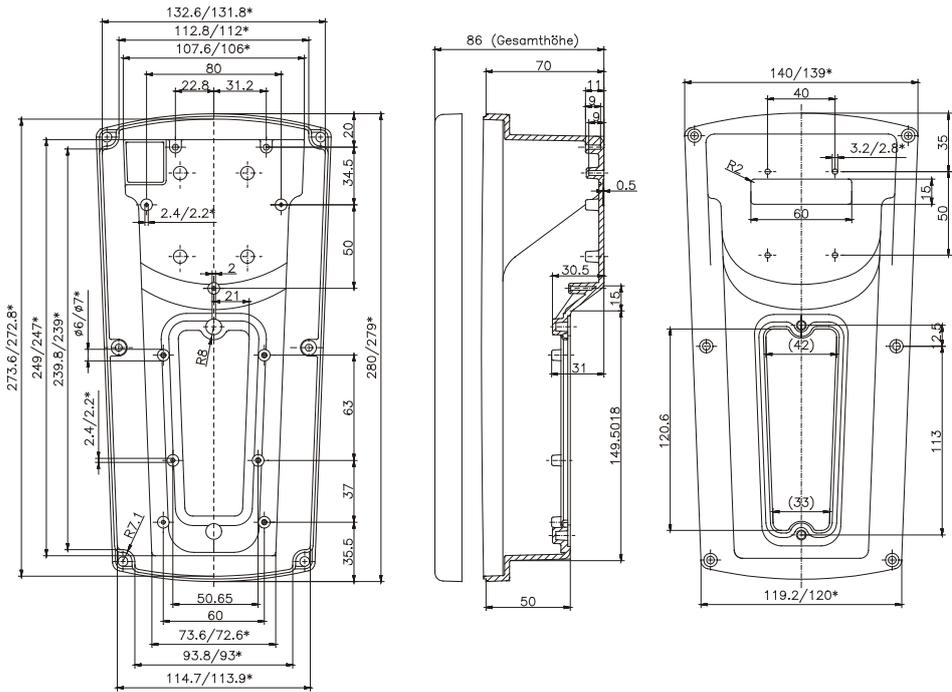

\* = Conical form tapering downwards

Closed lid

Lid frame

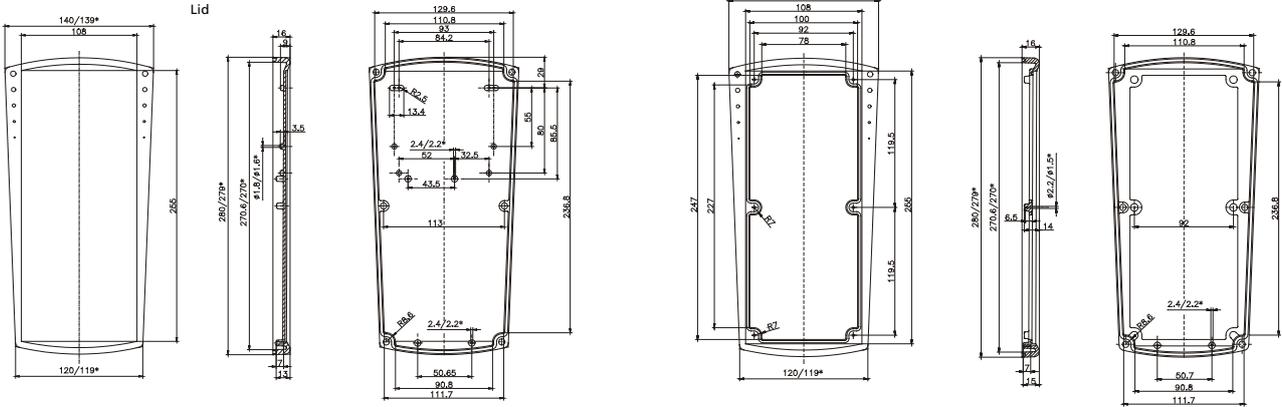

# Pilot 250



Pilot with membrane keypad



Rear cover



Large mounting space for electronic assemblies



Wall holder

Order No. **29.25 01 05**



Magnetic holder round

Order No. **29.25 01 02**



Cable gland

Size	Order No.
M 16 x 1,5	<b>08.10 01 16</b>
M 20 x 1,5	<b>08.10 01 20</b>



- Polyamide / PVC hand held enclosure for MCR and automation engineering
- Large fitting space
- Variable length using profile technology

#### Included in delivery

Enclosure system consisting of polyamide internal enclosure with end covers, two side PVC cover profiles, Alucobond composite front plate, rear wall, 2 external end covers, with M 25 x 1,5 threaded hole for cable gland

#### Technical data

##### Material:

Polyamide / PVC

##### Ingress protection:

IP 65 to EN 60529

##### Impact resistance:

5 Joule to EN 60079-0

##### Flammability:

End covers: UL 94 HB

##### Colour:

End covers: RAL 1021, rape yellow

PVC-profile: RAL 9005, jet black

##### Temperature range:


-20°C to +70°C




Dimensions



Standard	Dimensions	Weight (g)
<b>29.11 10 00</b>	280 x 191 x 76	1660
<b>29.12 10 00</b>	330 x 191 x 76	1900
<b>29.13 10 00</b>	440 x 191 x 76	2200
<b>29.19 10 00</b>	Special length	

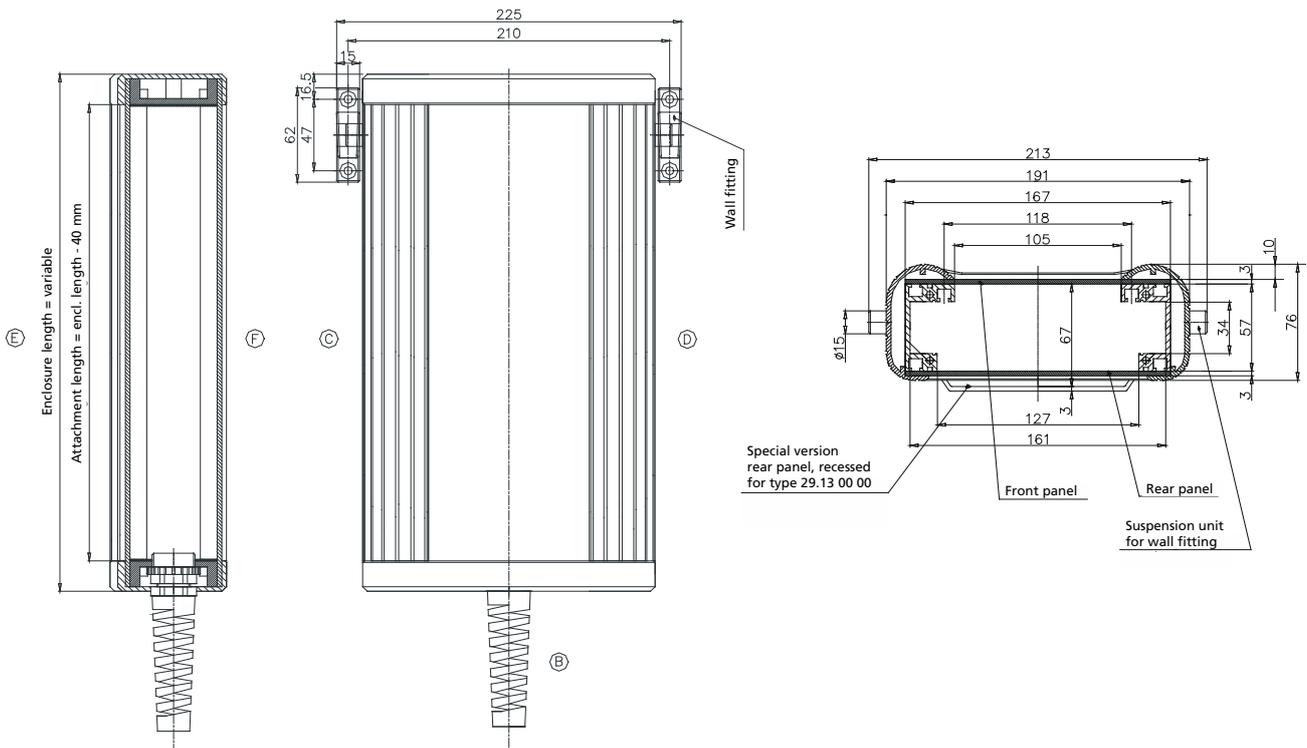

Type	A	B	C	D	G
<b>29.11 10 00</b>	274	-	92	240	105/127
<b>29.12 10 00</b>	324	162	81	290	105/127
<b>29.13 10 00</b>	434	217	109	400	105/127
Special size, $A \leq 300$ mm	Enclosure length - 6	-	A/3	A - 34	105/127
Special size, $A \geq 300$ mm	Enclosure length - 6	A/2	A/4	A - 34	105/127

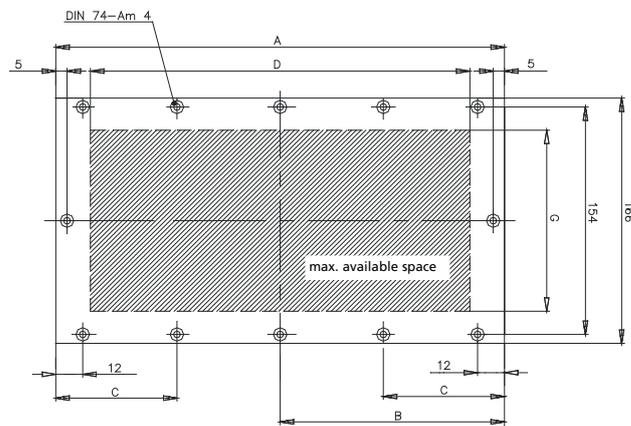

---

# Pilot 50

---

## Zubehör



**PCB fixing set**  
Set = 4 pcs with spring nuts  
Order No. **29.00 00 60**



**Set of spring nuts**  
Spring nuts (M4) for internal mounting;  
set = 4 pcs  
Order No. **29.00 00 50**



**Wall holder set**  
Order No. **29.00 00 70**



Pilot with small control device



Inner T-slots offer mounting facilities on all sides



EMC version



Variable fittings



- Hand held enclosure for MCR and automation engineering
- Robust design (Polyamide or Polyester)
- Version with handle and integrated cable entry (Pilot 10, 20 standard)

#### Included in delivery

Pilot 10/20: enclosure with handle, including cable gland M 20 x 1,5, front plate with fastening screw and wall holder

Pilot 30: two-part Polyester enclosure with self-adhesive aluminium front plate, enclosure screws and wall holder

#### Technical data

##### Material:

Pilot 10 and Pilot 20: Polyamide

Pilot 30: Polyester

##### Ingress protection:

Pilot 10 and Pilot 20: IP 65 to EN 60529

Pilot 30: IP 66 to EN 60529

##### Impact resistance:

7 Joule to EN 60079-0

##### Flammability:

Pilot 10 and 20: UL 94 HB

Pilot 30: UL 94 V-0

##### Colour:

RAL 1021, rape yellow

##### Temperature range:

Pilot 10 and Pilot 20: -40°C to +60°C

Pilot 30: -25°C to +90°C

---

# Pilot 10/20/30

---

## Product range

Type	Order No.	Enclosure dimensions incl. handle W x L x H (mm)	Front plate dimensions W x H (mm)	Mounting depth (mm)
Pilot 10	<b>29.40 02 00</b>	70 x 93 x 190	61 x 59	67
Pilot 20	<b>29.30 01 00</b>	115 x 93 x 200	106 x 69	67
Pilot 30	<b>29.50 01 00</b>	164 x 116 x 295	70 x 280	71

## Accessories

Mounting plate (Pilot 20)	<b>29.31 00 00</b>
Wall holder (2 pcs. with screws)	<b>29.60 01 00</b>
Cable gland M 20 x 1,5 (Pilot 30)	<b>08.10 01 20</b>
Push button and switches see page 53 - 58	



### Electromechanical components


On request, we can supply equipment fitted with electro-mechanical components such as emergency stop button, acknowledge keys, hand wheel, switches, display

Dimensions




Type	Order No.	Weight (g)
Pilot 10	<b>29.40 02 00</b>	380
Pilot 20	<b>29.30 01 00</b>	440


Pilot 10

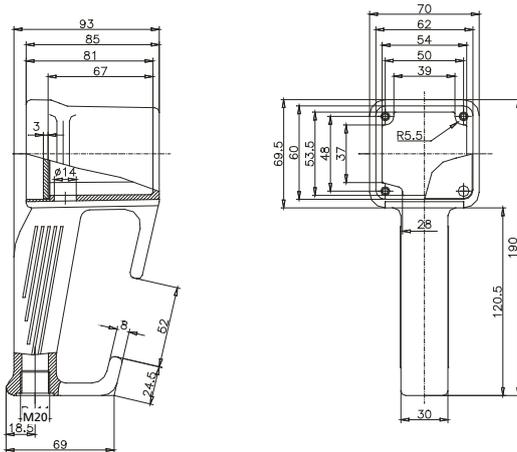

Pilot 20

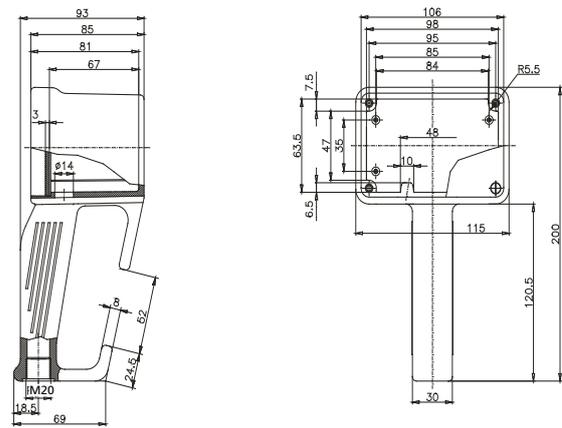

Type	Order No.	Weight (g)
Pilot 30	<b>29.50 01 00</b>	1700

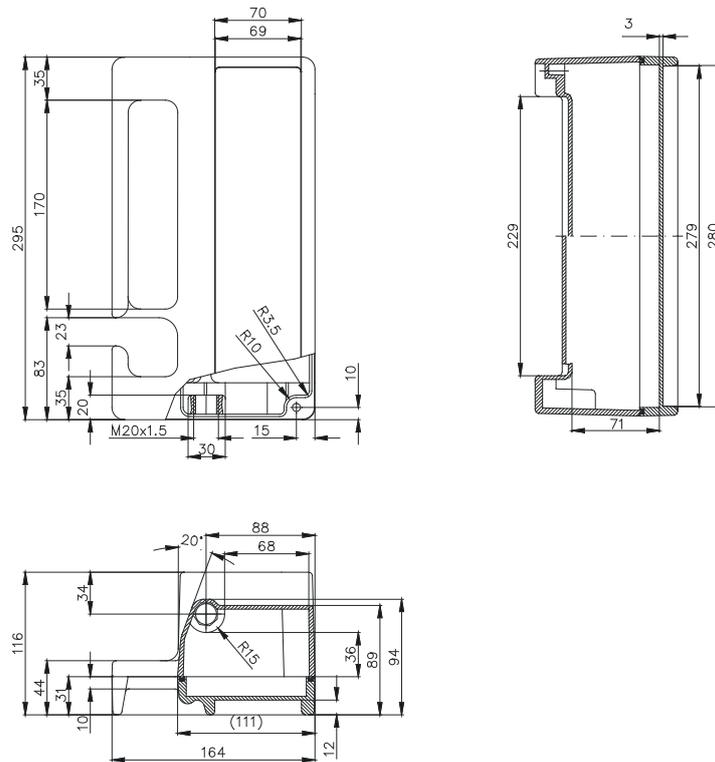



# Pilot 10/20/30

## Accessories




**Wall holder**  
Set complete with 2 fittings and screws

Order No. **29.60 01 00**

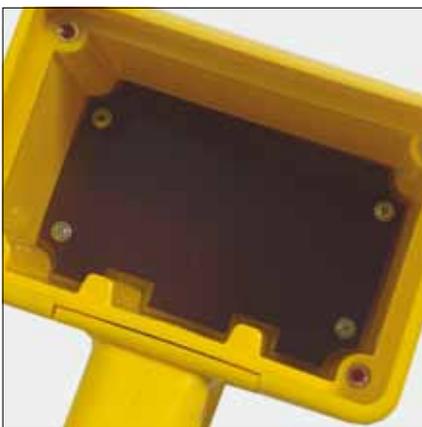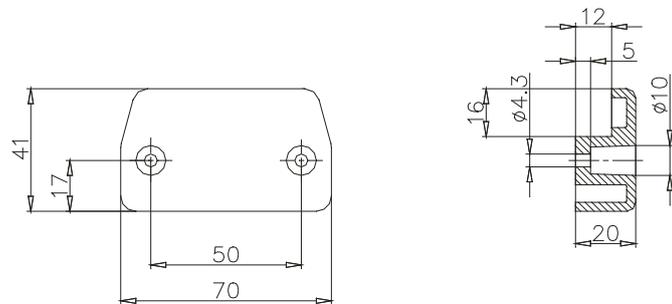

**Mounting plate Pilot 20**

Order No. **29.31 00 00**

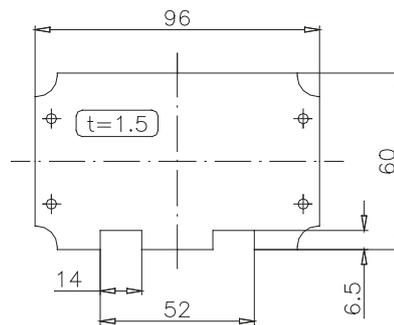


One and two button enclosures Pilot 10 / Pilot 20



Integrated handles on Pilot 10 and Pilot 20



Multi button enclosure Pilot 30

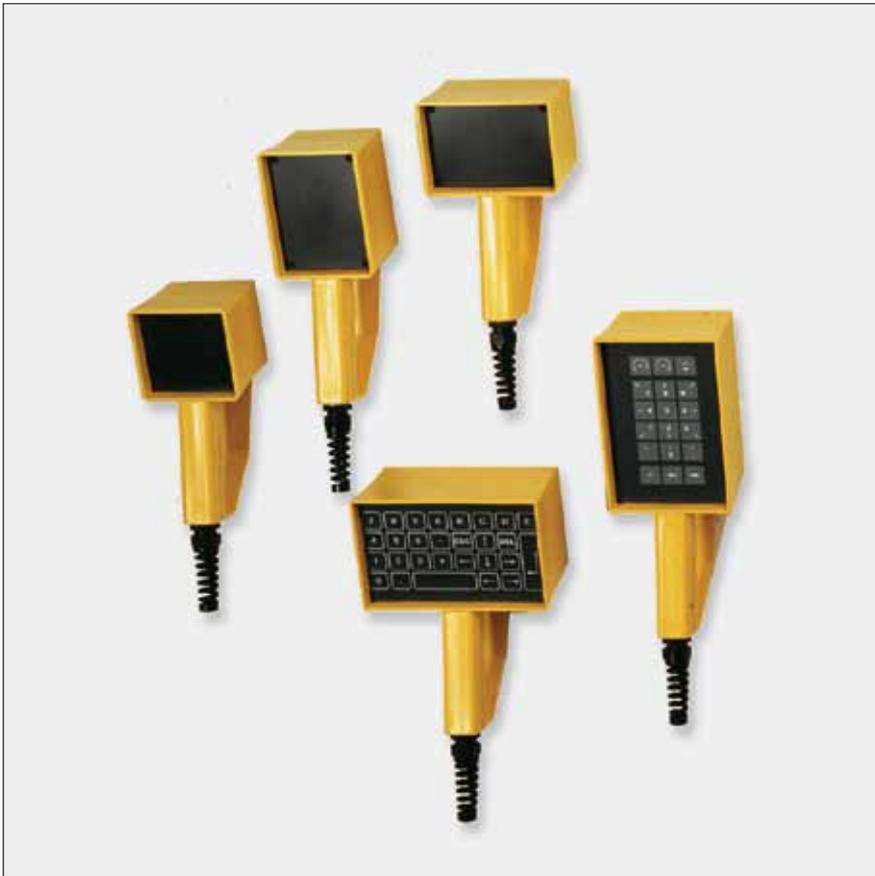

- Polyamide hand enclosure for automation and control engineering
- Version with handle and integrated cable entry
- Large fitting space

### Technical data

**Material:**

Polyamide

Front plate: Polystyrol

**Ingress protection:**

IP 65 to EN 60529

**Impact resistance:**

7 Joule to EN 60079-0

**Flammability:**

UL 94 HB

**Colour:**

RAL 1021, rape yellow

**Temperature range:**

-40°C to +60°C

### Included in delivery

Enclosure with handle, including cable gland M 20 x 1.5, front plate, enclosure and front panel screws, and wall holder

# Pilot 110 - 150

## Product range

Type	Order No.	Enclosure dimensions incl. handle W x L x H (mm)	Front plate dimensions W x H (mm)	Mounting depth (mm)
Pilot 110	<b>29.21 10 00</b>	85 x 85 x 191	77 x 77	63,5
Pilot 120	<b>29.21 20 00</b>	115 x 85 x 191	107 x 77	63,5
Pilot 130	<b>29.21 30 00</b>	85 x 85 x 221	77 x 107	63,5
Pilot 140	<b>29.21 40 00</b>	160 x 85 x 211	152 x 97	63,5
Pilot 150	<b>29.21 50 00</b>	105 x 85 x 266	97 x 152	63,5


## Accessories

Magnetic holder (for Pilot 120 - 150)	<b>29.00 00 80</b>
Push button and switches see page 53 - 58	



### Electromechanical components

On request, we can supply equipment fitted with electro-mechanical components such as emergency stop button, acknowledge keys, hand wheel, switches, display

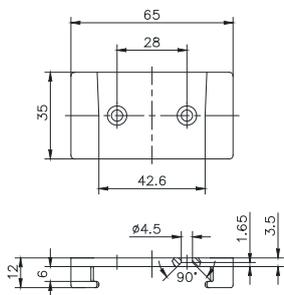


### Wall holder

included in delivery

Dimensions




Type	Order No.	Weight (g)
Pilot 110	<b>29.21 10 00</b>	500

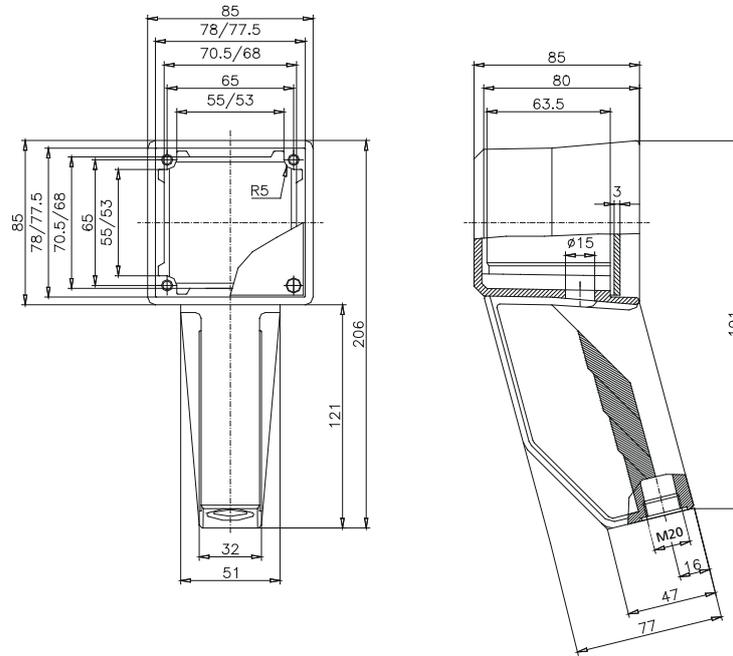


Type	Order No.	Weight (g)
Pilot 120	<b>29.21 20 00</b>	341
Pilot 130	<b>29.21 30 00</b>	341

Pilot 120

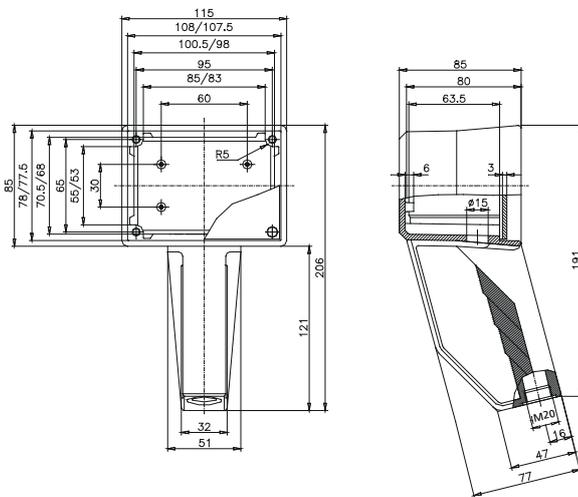

Pilot 130

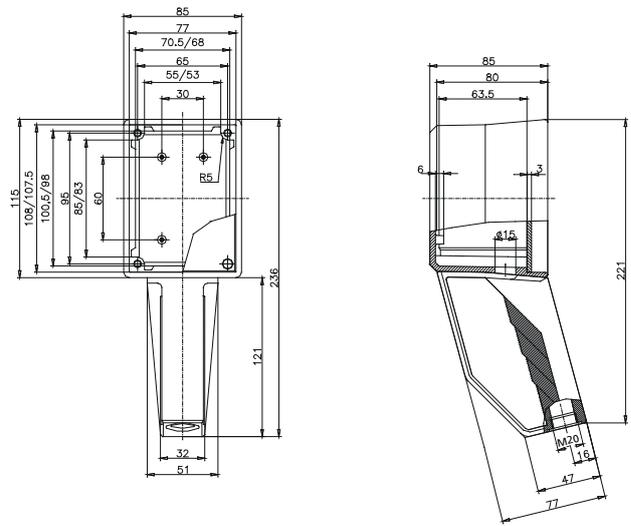


# Pilot 110 - 150

## Accessories




Type	Order No.	Weight (g)
Pilot 140	<b>29.21 40 00</b>	780
Pilot 150	<b>29.21 50 00</b>	780

**Pilot 140**

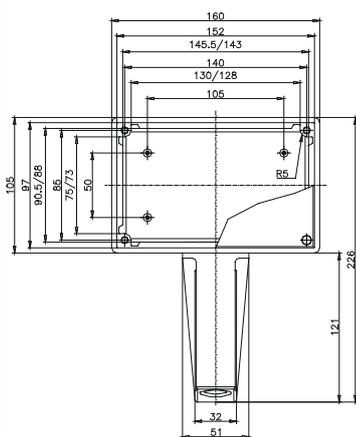

**Pilot 150**

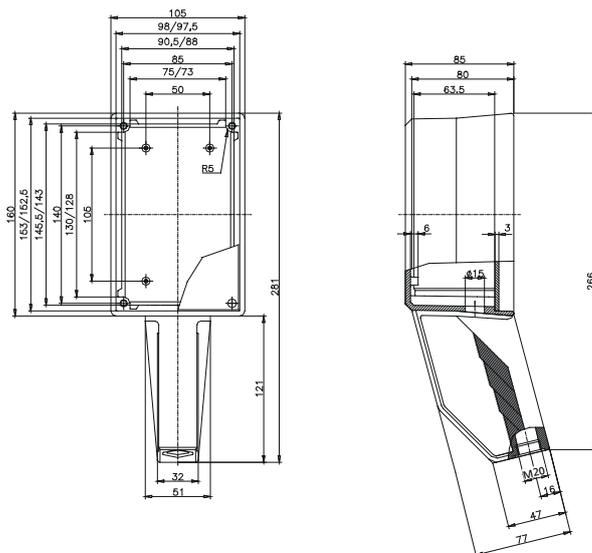

## Accessories



**Magnetic holder**  
for Pilot 120 - 150, self-adhesive  
dimensions: 90 x 30 x 7.5 mm

Order No. **29. 00 00 80**



- Polyamide hand held enclosures for data acquisition, MCR and automation engineering
- For installations and command devices mobile and stationary applicable
- Variable mounting depths

### Technical data

**Material:**

Enclosure: Polyamide

Border profile : NBR, black

**Ingress protection:**

IP 65 to EN 60529

**EMC:**

Optional

**Surface resistance:**

10<sup>12</sup> Ohm, IEC 60093

**Flammability:**

UL 94 V-2

**Colour:**

RAL 7021, black grey

**Temperature range:**

-20°C to +60°C

**Included in delivery:**

Clam shell enclosure with top and base, each with fixing domes incl. seals and border profile, 3 cover flaps for interface garages, screws and fixing materials for front panel mounting.

# Limanda

## Product range

Order No.	Type	Dimensions (mm) W x L x H	Weight (g)
<b>27.03 03 00</b>	Limanda I	311 x 281 x 72	1200
<b>27.03 03 01</b>	Limanda I EMV	311 x 281 x 72	1200
<b>27.03 03 17</b>	Limanda I für OP17	311 x 281 x 97	1500
<b>27.03 02 00</b>	Limanda II	270 x 248 x 64	800
<b>27.03 02 01</b>	Limanda II EMV	270 x 248 x 64	800

## Accessories

	Order No.
Limanda I Aluminium front plate, natural anodized finish	<b>27.03 03 80</b>
Limanda I EMC front plate	<b>27.03 03 90</b>
Limanda II Aluminium front plate, natural anodized finish	<b>27.03 02 80</b>
Limanda II EMC front plate	<b>27.03 02 90</b>
Limanda I intermediate frame	<b>27.03 03 81</b>
Limanda II intermediate frame	<b>27.03 02 81</b>
Limanda II mounting set for Siemens TP 170 / TP 070	<b>27.03 02 82</b>
Limanda I EMC intermediate frame	<b>27.03 00 88</b>
Limanda II EMC intermediate frame	<b>27.03 02 88</b>
Limanda I handle set without push button	<b>27.03 00 83</b>
Limanda holder	<b>27.03 00 84</b>
Limanda carrying strap	<b>27.03 00 85</b>
Limanda carrying strap comfort	<b>27.03 00 92</b>
Limanda I quiver	<b>27.03 00 86</b>
Limanda II table stand (set = 2 pcs.)	<b>27.03 00 87</b>
Limanda II quiver	<b>27.03 00 89</b>
Limanda I quiver with intermediate frame	<b>27.03 00 90</b>
Limanda II quiver with intermediate frame	<b>27.03 00 91</b>
Limanda I handle set with 3 step enabling switch (right-hand version)	<b>27.03 00 71</b>
Limanda I handle set with 3 step enabling switch (left-hand version)	<b>27.03 00 72</b>
Cable connection with bending protection M 16	<b>08.10 01 16</b>
Cable connection with bending protection M 20	<b>08.10 01 20</b>
Cable connection with bending protection M 25	<b>08.10 01 25</b>
Inclining adapter for mounting directly on wall or machine	<b>50.02 00 01</b>
Inclining adapter for mounting directly onto GT 48/2 tube	<b>50.02 00 02</b>
Inclining adapter for mounting directly onto GTK electronic tube	<b>50.02 00 03</b>
Inclining adapter for mounting directly onto GT 48/2 or GTK electronic	<b>50.02 00 04</b>
Inclining adapter for holder onto GT 48/2 tube	<b>50.02 00 05</b>
Inclining adapter for holder onto GTK electronic tube	<b>50.02 00 06</b>
Inclining adapter for holder on wall or machine	<b>50.02 00 07</b>
Push button and switches see page 53 - 58	



Limanda enclosure systems enable installation of many manual operation panels.



**Limanda I for OP17** - Supplied ready for installation of the Siemens OP17 Operator Panel without additional fitting materials.




**Limanda II** with fitted command unit

Dimensions




Limanda I

Order No. **27.03 03 00**

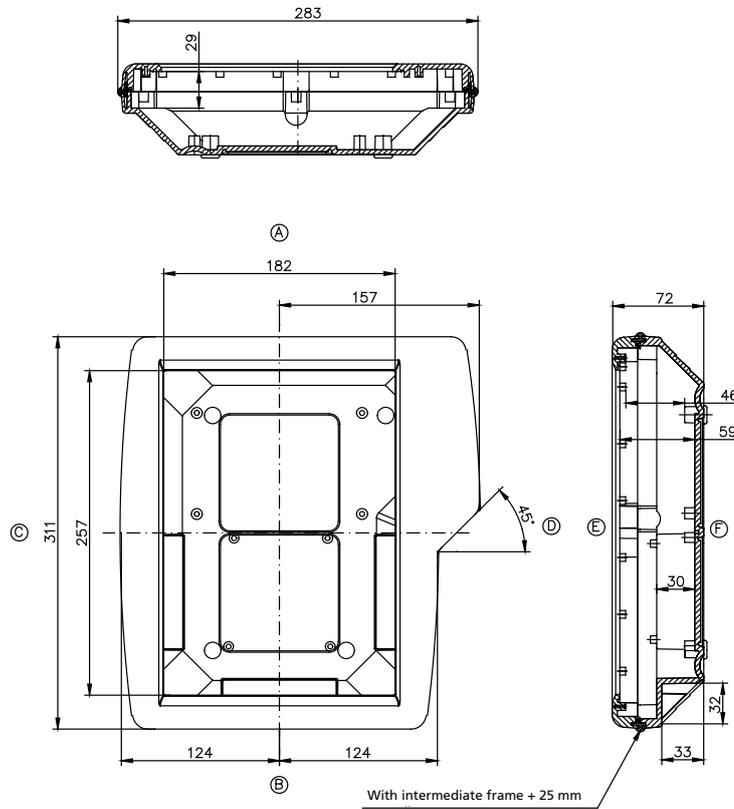

Limanda II

Order No. **27.03 02 00**

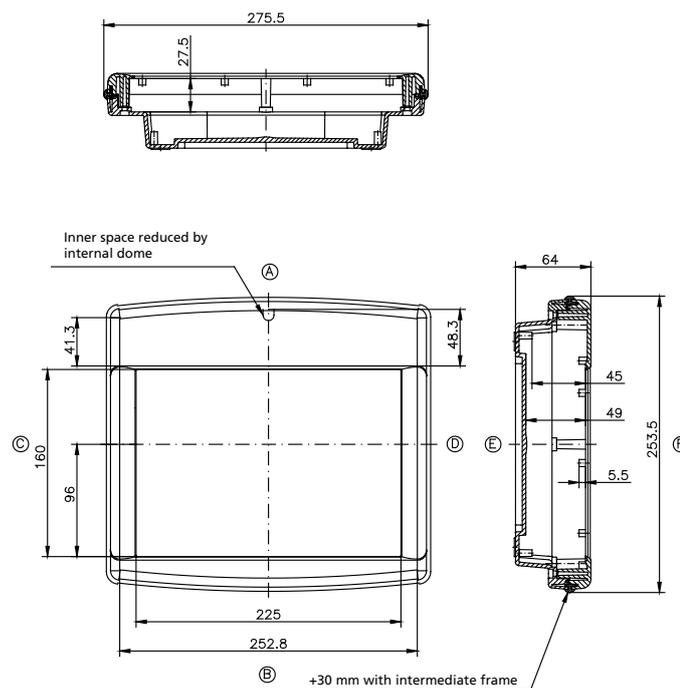

# Limanda

## Accessories





### Limanda I handle set without push button

For installation on all four rear corners of the enclosure. The handle incorporates a stepped engaging mechanism which allows it to be optimally adjusted for the operator during installation.

IP 65 once assembled.

Order No. **27.03 00 83**

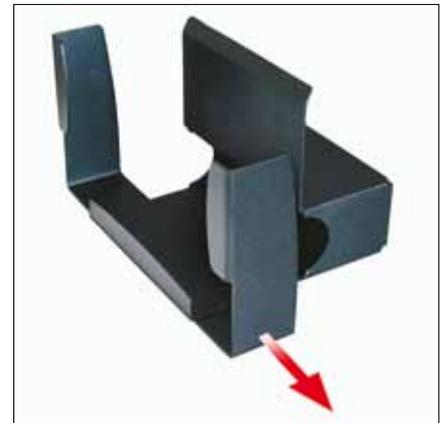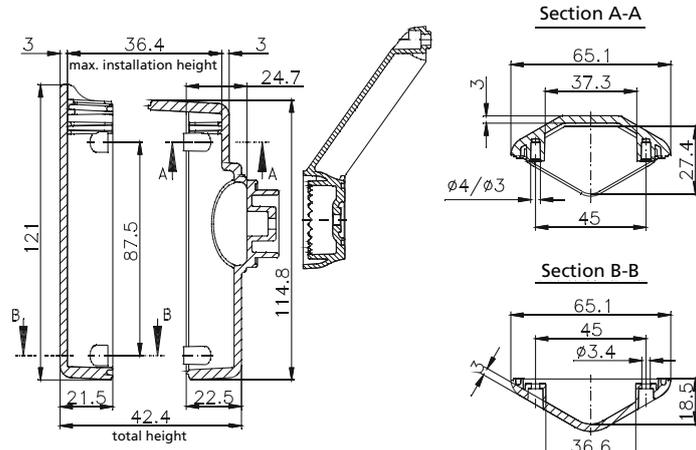

**Limanda I handle set with 3-step enabling switch**  
(2-channel) for use in service, set up and programming operations.  
Included in delivery: handle set with fixed enabling switch


Order No.	Type
<b>27.03 00 71</b>	Right-hand version
<b>27.03 00 72</b>	Left-hand version

Technical data see page 53 - 58

### Limanda quiver

Wall holder - adjustable in width, can be adapted to inclining adapter.  
Material sheet steel.

Order No.	for version
<b>27.03 00 86</b>	Limanda I
<b>27.03 00 89</b>	Limanda II
<b>27.03 00 90</b>	Limanda I with intermediate frame
<b>27.03 00 91</b>	Limanda II with intermediate frame

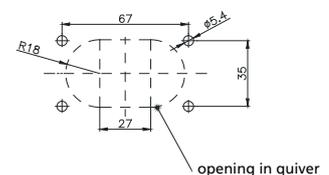

## Accessories



### Limanda holder

Enables rapid removal of the Limanda from the inclining adapter (for Limanda I and II). There is a gap of 19.5 mm between the Limanda and the holder for assembly purposes.

Order No. **27.03 00 84**



### Limanda I intermediate frame

To increase the mounting depth

Order No.	Depth	for version
<b>27.03 03 81</b>	25 mm	Limanda I
<b>27.03 02 81</b>	30 mm	Limanda II
<b>27.03 00 88</b>	25 mm	Limanda I EMC
<b>27.03 02 88</b>	30 mm	Limanda II EMC



### Limanda carrying strap

Carrying strap in 2 versions: Standard and comfort: strengthened execution with shoulder pad

Order No.	
<b>27.03 00 85</b>	Carrying strap
<b>27.03 00 92</b>	Carrying strap comfort



### Inclining adapter

Order No.	Type	Weight (g)
<b>50.02 00 01</b>	For mounting directly on wall or machine	1286
<b>50.02 00 02</b>	For mounting directly onto GT 48/2 tube	986
<b>50.02 00 03</b>	For mounting directly onto GTK electronic tube	1004
<b>50.02 00 04</b>	For mounting directly onto GT 48/2 or GTK electronic	900

### Technical data

Material	2.5 mm sheet steel
Bellow	PVC (T-50M), RAL 9005 (black)
Surface	black powder-coated
Temperature range	-40°C to +60°C
Stepped engaging mechanism	22,5°-steps



### Cable connection with bending protection (no lock nut)

Order No.	Type
<b>08.10 01 16</b>	M 16 cable connection with bending protection
<b>08.10 01 20</b>	M 20 cable connection with bending protection
<b>08.10 01 25</b>	M 25 cable connection with bending protection

### Technical data

Material	Polyamide
Moulded seal	NBR
Enclosure rating	IP 68 - 5 bar
Temperature range	-20°C to +100°C
Colour	RAL 9005 jet black

# Limanda

## Accessories




### Inclining adapter for holder

Order No.	Type	Weight (g)
<b>50.02 00 05</b>	For mounting directly onto GT 48/2 tube	776
<b>50.02 00 06</b>	For mounting directly onto GTK electronic tube	804
<b>50.02 00 07</b>	For mounting directly on wall or machine	490


### Technical data

Material	2.5 mm sheet steel (black powdered)
Knurled handles	reinforced thermoplastic
Temperature range	-40°C to +60°C


Variant 1

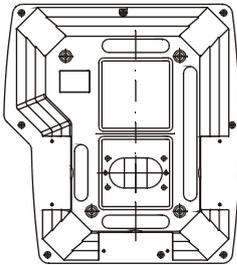


Variant 2

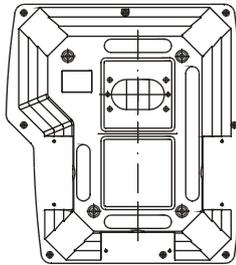

Variant 3

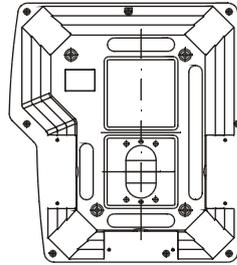


Variant 4

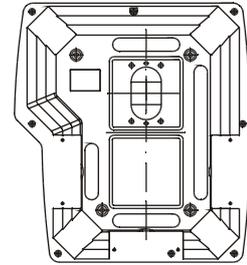

Specific Limanda drilling pattern required!

### Dimensions (wall mounted version)

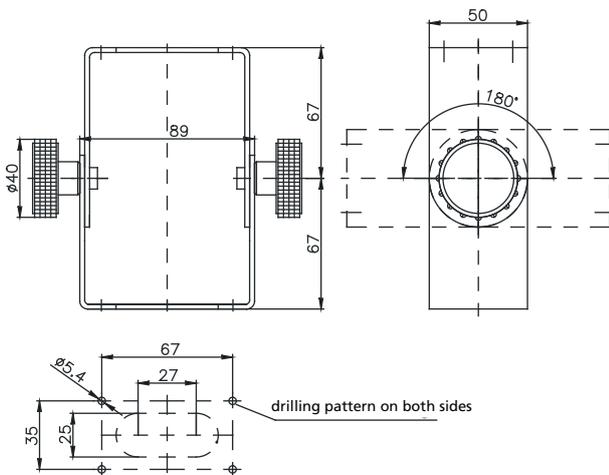



# Electro-mechanical components



2-step enabling switch (1NO), blue


Order No. **83.50 00 10**

2-step enabling switch (1NC/1NO), blue

Order No. **83.50 00 09**

**Technical data**

Contact loading	48 V (AC), 500 mA 250 V (AC), 200 mA 50 V (DC), 200 mA
Ingress protection	IP 67 front side
Temperature range	-40°C to +125°C (no condensation)
Volume resistance	max. 50 mW (initial value)
Service life	≥ 5 x 10 <sup>5</sup> switchings

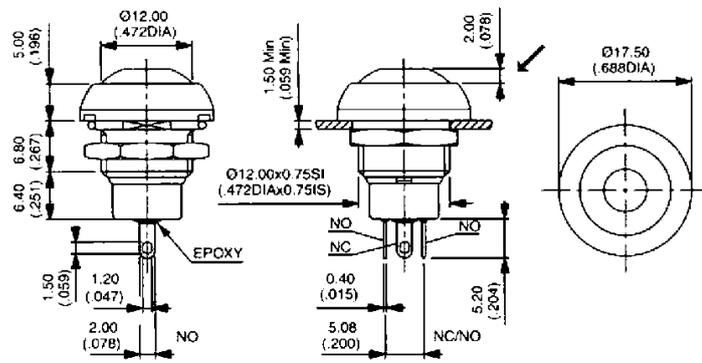


Emergency stop button (2NC),  $\varnothing 25$ mm, red


Order No. **83.50 00 02**

**Technical data**

Contact system and fitting	2 NC
Ingress protection	IP 65 front side
Temperature range	-25°C to +70°C (no condensation)
Connections	galvanized, suitable to 4-pole multipoint socket connector
Switching voltage	0,02 to 25 V AC/DC
Switching current	0,1 to 1 A
Volumne resistance	< 100 mW
Duration of bounce	< 10 ms
Service life	> 1,5 x 10 <sup>4</sup> switchings

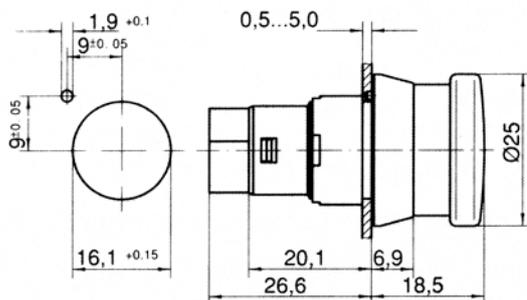


Connection diagram (view from down)

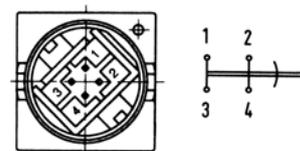



PCB plug-socket for emergency stop button, Ø 25 mm

Order No. **83.90 00 01**

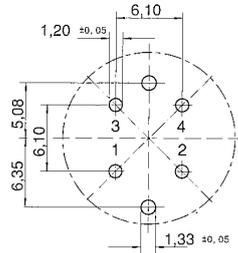

Contact fitting area

NC 1: Pin 1 - blue  
Pin 2 - black  
NC 2: Pin 3 - blue  
Pin 4 - black



Ribbon cable

10 cm with multipoint socket connector and strip, AMP 4-pole for emergency stop button Ø 25 mm

Order No. **83.90 00 02**







Emergency stop button with switch unit (2NC), Ø 28 mm, red

Order No. **83.50 00 03**

### Technical data

Contact system and fitting	self cleaning bridge forming contact (Ag), 2 NC
Ingress protection	IP 65 front side
Temperature range	-25°C to +70°C (no condensation)
Connections	Flat plug 2.8 x 0.8
Switching voltage	AC: 250 V / DC: 24 V (further voltage on request)
Switching current	AC: 1,5 A / DC: 2,0 A
Volume resistance	max. 20 mW (initial value)
Service life	≥ 3 x 10 <sup>4</sup> switchings

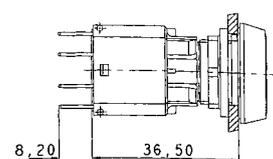

# Elektro-mechanical components



Emergency stop button (3NC/1NO), Ø 29 mm, red


Order No. **83.50 00 04**

Stop push button (3NC/1NO), Ø 29 mm, grey

Order No. **83. 50 00 05**

**Technical data**

Contact system and fitting	obligation-led contacts (3 NC / 1 NO)
Ingress protection	IP 65 front side
Temperature range	-25°C to +60°C (no condensation)
Connections	soldered connection
Switching voltage (direct contact)	AC(12): 250 V / DC(12): 30 V
Switching current (direct contact)	AC(12): 3,0 A / DC(12): 2,0 A
Switching voltage (indirect contact)	AC(12): 250 V / DC(12): 30 V
Switching current (indirect contact)	AC(12): 0,6 A / DC(12): 2,0 A
Volume resistance	max. 50 mW (initial value)
Service life	≥ 1 x 10 <sup>5</sup> switchings



Direct contact

1 NC: connections right



2 NC: connections right and left

3 NC: connections right, left and above

Emergency stop label for command element,  
16 mm, yellow, 4 speeches, 40 x 40 mm

Order No. **83.90 00 07**

front panel strength 0.5 to 3.7

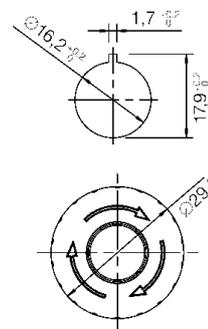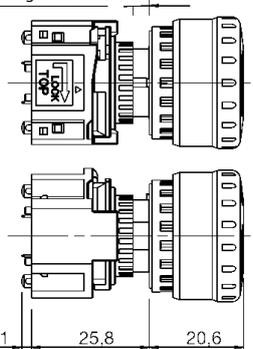



3-steps enabling switches (2 changer), 80 x 22, black

Order No. **83.50 00 06**

**Technical data**

Contact system and fitting	2 main switches (changer)
Contact rating	30 V DC, max. 0,5 A
Ingress protection	IP 65
Temperature range	0°C to +50°C
Fullfilled standards	89/392/EWG; IEC 204-1: EN 60204/DIN VDE 0113; DIN VDE 0110: EN292

**Connection diagram**

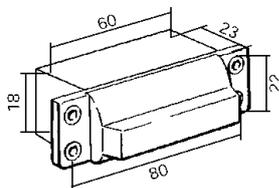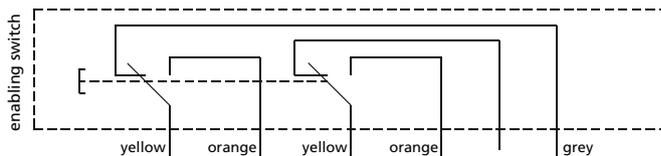

enabling switch	yellow	orange	yellow	orange	grey	grey		
evaluator	JSBR4	S13	S14	S24	S23	X2	X3	
	JSBT4	S13	S14	S24	S23			
	RT6	S13	S14	S24	S23			
	RT7	S13	S14	S24	S23			
	JSBRT8	A1	S14	S24	A2			
	JSBRT11	S13	S14	S24	S23			
	JSHT2	S13	S14	S24	S23			





3-steps enabling switches (2 changers), 55 x 25, yellow

Order No. **83.50 00 07**

**Technical data**

Contact system and fitting	2 main switches (changer)
Ingress protection	IP 65 (with rubber cap)
Temperature range	-25°C to +60°C (no condensation)
Connections	soldered condensation
Switching voltage	AC(12): 125 V / DC(12): 30 V
Switching current	AC(12): 1,0 A / DC(12): 1,0 A
Volume resistance	max. 50 mW (initial value)
Service life	≥ 1 x 10 <sup>5</sup> switchings

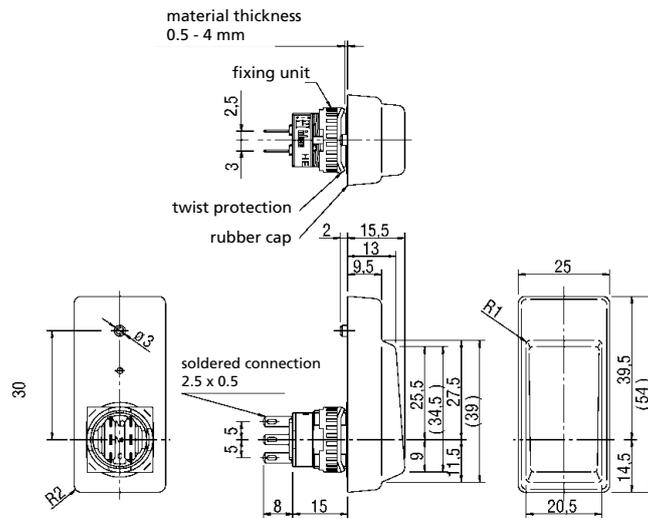


3-steps enabling switches (2 changer),  $\varnothing 20$  mm, yellow

Order No. **83.50 00 08**

**Technical data**

Contact system and fitting	2 main switches (changer)
Ingress protection	IP 65 (with rubber cap)
Temperature range	-10°C bis +60°C (no condensation)
Connections	soldered connection
Switch voltage	AC(12): 125 V / DC(12): 30 V
Switch current	AC(12): 0,5 A / DC(12): 1,0 A
Volume resistance	max. 50 mW (initial value)
Service life	≥ 1 x 10 <sup>5</sup> switchings

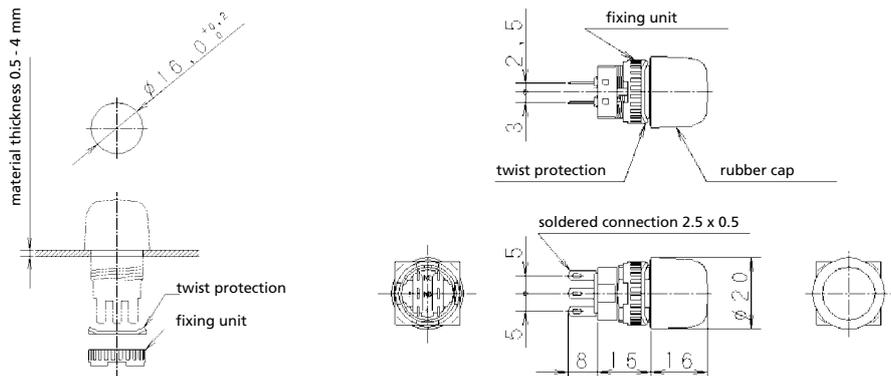

# Elektro-mechanical components

## Product allocation

Products	2-steps enabling switches (1NO), blue	2-steps enabling switches (1NC/1NO), blue	Emergency stop button (2NC), Ø 25 mm, red	PCB-plug-socket for emergency stop button Ø 25 mm	Ribbon cable 10 cm with multipoint socket connector and strip, AMP 4-pole for emergency stop button Ø 25 mm	Emergency stop button with contact block (2NC), Ø 28 mm, red
Order No.	<b>83.50 00 10</b>	<b>83.50 00 09</b>	<b>83.50 00 02</b>	<b>83.90 00 01</b>	<b>83.90 00 02</b>	<b>83.50 00 03</b>
Taguan 130			x	x	x	
Taguan 180			x	x	x	
Taguan 230			x	x	x	
Beluga 180	x	x	x	x	x	x
Beluga 220	x	x	x	x	x	x
Beluga 380	x	x	x	x	x	x
Pilot 250	x	x	x	x	x	x
Pilot 50			x	x	x	x
Pilot 10			x	x	x	x
Pilot 20			x	x	x	x
Pilot 30			x	x	x	x
Pilot 110			x	x	x	x
Pilot 120			x	x	x	x
Pilot 130			x	x	x	x
Pilot 140			x	x	x	x
Limanda I Griffset	x	x				
Limanda I	x	x	x	x	x	x
Limanda II	x	x	x	x	x	x
Norvent	x	x	x	x	x	x

Products	Emergency stop button (3NC/1NO), Ø 29 mm, red	Stop button (3NC/1NO), Ø 29 mm, grey	3-steps enabling switches (2 changer), 80 x 22, black	3-steps enabling switches (2 changer), 55 x 25, yellow	3-steps enabling switches (2 changer), Ø 20 mm, yellow
Order No.	<b>83.50 00 04</b>	<b>83.50 00 05</b>	<b>83.50 00 06</b>	<b>83.50 00 07</b>	<b>83.50 00 08</b>
Taguan 130					
Taguan 180					
Taguan 230					
Beluga 180	x	x			
Beluga 220	x	x			x
Beluga 380	x	x			
Pilot 250	x	x	x	x	x
Pilot 50	x	x			
Pilot 10	x	x			x
Pilot 20	x	x			
Pilot 30	x	x			
Pilot 110	x	x			x
Pilot 120	x	x			
Pilot 130	x	x			
Pilot 140	x	x			
Limanda I Griffset			x		x
Limanda I	x	x	x		x
Limanda II	x	x	x	x	x
Norvent	x	x	x	x	x

## The way to the right enclosure

Various criteria must be taken into account when selecting an enclosure:

- the fitting location (internal or external use, explosion zone, sea-water use etc.)
- the size (depends on the contents)
- the protective functions (ingress protection, EMC toughness, Ex)

The listings below should help you to select the right enclosure to match your special requirements.

## I. Enclosure material specifications

### Aluminium enclosures (Pilot 50, EMC)

- light-weight, robust metal enclosures
- good resistance to chemicals (see chart)
- can be used in a wide temperature range
- basic EMC screening (full screening optional)
- machining operations easy to carry out
- application areas: suitable for indoor and outdoor use

### Polyester enclosures (Pilot 30)

- plastic enclosures for hostile atmospheres
- good resistance to chemicals (see chart)
- can be used in a wide temperature range
- good insulating properties
- VO design (to UL)
- application areas: suitable for indoor and outdoor use

### PVC enclosures

- light-weight plastic enclosures
- good resistance to chemicals (see chart)
- machining operations easy to carry out
- application areas: suitable for indoor and outdoor use

### ABS enclosures (Taguan)

- light-weight plastic enclosure
- good resistance to chemicals (see chart)
- used within a normal temperature range
- application areas: hand-held operating enclosures for data acquisition and measurement

### Polyamide enclosures (Beluga, Pilot 10 / 20, Pilot 110 / 150)

- light-weight plastic enclosure
- good insulating properties
- high impact resistance
- application areas: hand-held operating enclosures for machine control

## II. Temperature range

The definition of temperature resistance for enclosures is based on the maximum continuous temperature at which the enclosure remains dimensionally stable and the ingress protection remains guaranteed. Admissible short term peak temperatures are often considerably higher.

The definition of temperature resistance in the case of the components of the process automation is based to the maximum continuous temperature, provided that the factory-installed (electronic) components are functioning correctly and the enclosure rating is maintained.

Further classifications apply to storage and transport, and are listed in the respective product descriptions.

## III. Corrosion resistance

### We offer the following for critical external areas:

SWB version (seawater-resistant):

Purified - chromated - powder-coated

Standard colour RAL 5009, other colours on request.

For application areas with extreme UV radiation we recommend coating with a special Polyester powder.

SBG/SBGL version only for wet painting processes

SBG = washed - chromated - priming

SBGL = washed - chromated - priming - painting

Stainless steel socket inserts available on request.

---

# General technical informations

---

## IV. Ingress protection

ROSE enclosures are classified in ingress protection to the generally applicable guidelines contained in EN 60529 and IEC 144.

The ingress protection is indicated by an abbreviation, which is always composed of the two letters IP and two digits relating to the protection level.

### Protection class for contact and foreign body protection

First digit	Designation
0	No protection
1	Protection against large foreign bodies
2	Protection against medium-sized foreign bodies
3	Protection against small foreign bodies
4	Protection against grain-shaped foreign bodies
5	Protection against dust deposits
6	Protection against dust entry

### Protection class for water protection

Second digit	Designation
0	No protection
1	Protection against vertical falling drip water
2	Protection against obliquely falling drip water
3	Protection against water spray
4	Protection against splashing water
5	Protection against water jets
6	Protection when flooded
7	Protection when immersed
8	Protection when submerged

Note: The ingress protection indicated for the enclosures is based on non-processed enclosures as supplied. Aging and temperature fluctuations can lead to a diminution of the ingress protection.

## V. Chemical resistance

### Enclosure material chemical resistance

Chemicals	Aluminium	Stainless steel	Polycarbonate	Polyester	Polystyrene	Polyamide
Acetone	+	+	-	-	-	•
Formic acid	•	+	30 %	10 %	•	-
Ammonia	+	+	-	-	+	20 %
Petrol	+	+	•	+	•	+
Benzene	+	+	-	+	-	-
Brake fluid	/	/	-	+	/	60°
Butane	+	/	+	/	-	+
Butanol	/	/	/	+	/	+
Calcium chloride	+	+	+	+	+	+
Chloral benzene	+	/	-	+	-	•
Diesel oil	/	/	•	+	•	/
Acetic acid	+	+	10 %	40 %	+ max. 50 %	-
Formaldehyde	+	+	/	30 %	+ max. 40 %	+
Freon 113	/	/	+	+	/	/
Fruit juice	/	+	+	+	/	+
Glycerine	+	+	•	+	+	+
Fuel oil	+	+	•	+	•	+
Hydraulic oil	/	/	+	+	•	+
Caustic potash solution	/	+	-	-	+ max. 50 %	-
Potassium chloride	•	+	+	+	+	+
Potassium hydroxide	-	+	/	-	+	/
Linseed oil	+	+	+	+	+	+
Methane	+	+	-	-	+	•
Methylene chloride	+	+	-	-	-	-
Lactic acid	+	+	10 %	+	+ max. 80 %	10 %
Mineral oils	/	/	+	+	+	+
Motor oils	/	/	+	+	+	+
Sodium carbonate	•	+	+	+	+	+
Sodium chloride	•	•	+	+	+	10 %
Sodium hydroxide	+	+	/	-	/	/
Soda lye	/	+	-	40 %	+ max. 50 %	10 %
Nitric acid	+	+	10 %	10 %	+ max. 25 %	-
Hydrochloric acid	/	+	20 %	+	+ max. 10 %	-
Lubricating oil	+	+	+	+	/	+
Carbon bisulphide	+	+	-	-	-	•
Sulphuric acid	•	+	50 %	70 %	+ max. 50 %	-
Suds	/	+	•	+	/	+
Cleansing agent	/	+	+	/	/	/
Terpentine oil	/	/	/	+	-	+
Carbon tetrachloride	+	/	/	+	-	•
Toluene	+	/	-	+	-	+
Trichlorethylene	+	/	/	-	-	-
Water (dest. water, river, tap or seawater)	/	+	+	+	+	+
Tartaric acid	/	/	10 %	+	+	+
Xylene	+	/	-	+	-	+
Zinc sulfate	•	/	+	+	+	/
Citric acid	+	/	10 %	+	+	10 %

#### Explanation of symbols

- + resistant against all concentrations
- + resistant against maximum % concentration
- C° resistant to maximum C°
- limited resistance
- not resistant
- / no information

# General technical informations

## Enclosure seal and accessory chemical resistance

Chemicals	Chloroprene	EPDM	NBR	Pocane	Polyurethane	PVC	Silicone
Acetone	+	+	-	+	-	-	•
Formic acid	+	+	-	10 %	/	< 50 %	•
Ammonia	+	+	+	10 %	/	•	+
Petrol	+	•	+	+	+	+	+
Benzene	-	-	-	+	+	-	-
Brake fluid	•	-	/	+	/	/	+
Butane	+	/	+	+	/	50 %	-
Butanol	+	/	-	+	/	•	-
Calcium chloride	/	/	/	10 %	/	+	/
Chloral benzene	-	-	-	-	-	-	-
Diesel oil	•	•	/	+	+	•	•
Acetic acid	-	/	-	10 %	/	25 %	-
Formaldehyde	-	/	+	/	/	40 %	+
Freon 113	+	/	+	+	/	/	/
Fruit juice	+	+	/	+	+	+	+
Glycerine	+	+	+	+	+	+	+
Fuel oil	•	•	+	+	+	•	•
Hydraulic oil	+	/	/	+	/	/	•
Caustic potash solution	+	/	/	10 %	/	+	/
Potassium chloride	+	+	+	10 %	+	+	+
Potassium hydroxide	+	+	+	-	-	/	•
Linseed oil	+	+	+	+	+	+	•
Methane	+	/	•	+	/	/	+
Methylene chloride	-	/	-	-	-	-	-
Lactic acid	+	+	+	/	/	10 %	/
Mineral oils	•	•	+	+	+	+	+
Motor oils	•	•	+	+	+	/	+
Sodium carbonate	/	/	/	10 %	/	/	/
Sodium chloride	+	+	+	10 %	+	+	+
Sodium hydroxide	+	+	•	-	-	•	•
Soda lye	50 %	/	-	/	/	60 %	-
Nitric acid	•	+	•	10 %	-	30 %	-
Hydrochloric acid	+	+	< 65 % •	10 %	-	30 %	/
Lubricating oil	•	•	+	+	+	+	+
Carbon bisulphide	-	/	-	+	/	•	-
Sulphuric acid	50 %	/	25 %	10 %	/	80 %	25 %
Suds	+	/	+	10 %	•	•	+
Cleansing agent	+	•	/	+	•	/	+
Terpentine oil	-	/	+	+	/	+	-
Carbon tetrachloride	-	-	-	+	-	•	-
Toluene	-	-	-	•	-	-	-
Trichlorethylene	-	-	-	•	-	-	-
Water (dest. water, river, tap or seawater)	+	+	80 C°	+	+	40 C°	+
Tartaric acid	+	+	+	/	+	10 %	+
Xylene	-	-	-	•	-	-	-
Zinc sulfate	+	+	+	/	/	40 %	+
Citric acid	+	+	+	10 %	/	10 %	+

Die Untersuchungen sind, wenn nichts Gegenteiliges angegeben ist, bei Raumtemperatur durchgeführt worden. Bei einem Zusammentreffen verschiedener Medien können sich die Beständigkeiten ändern. Daher können wir für die Angaben keine Gewähr übernehmen.

### Explanation of symbols

- + resistant against all concentrations
- + resistant against maximum % concentration
- C° resistant to maximum C°
- limited resistance
- not resistant
- / no information

## EMC in enclosure technology

### General information

In electrical/electronic engineering, enclosures assume two tasks:

- protection of the installed components from mechanical hazards and adverse radiation from outside
- protection of the surroundings from occurring mechanical and electrical hazards and adverse interference radiation from the components installed

Especially the electromagnetic compatibility (EMC) has an increasing effect on the selection of enclosures because of the ongoing development of the electronic components and the increased equipment density on the PCB's - which increasingly generates „pollution“ by electromagnetic interference radiation in the environment.

### Legal regulations

Within the framework of harmonising the European standards, an EC guideline directive (05.89/336/EEC) was passed in May 1989, which took effect in the Federal Republic of Germany on the 9th Nov. 1992 in the EMC law (EMVG).

This law is applicable to all units which might cause electromagnetic interference or the operation of which could be impaired by such interference.

The EMC directive came into effect on 1.1.1996 EC-wide - from which date all new electrical and electronic units brought into circulation within the EC had to fulfil these regulations.

As an external sign that the EC relevant laws (EMC law and further design basics), these units have to show the CE symbol.

### Requirements from the enclosure

Enclosures as such are not subjected to the EMC law, as by definition they are not electrical or electronic units.

However, enclosures are to a large extent responsible for the intensity of interference emission (receipt and transmission of interference waves) of a unit.


At this point, the choice of the enclosure material is also decisive for the screening effect which is composed of a reflection and an absorption damping of an enclosure.

Synthetic materials (plastics) alone have no filtering effect on interference radiation. A screening effect can be achieved by additional costly treatment (metal flashing or application of a conductive lacquer).

Metal enclosures, on the other hand, offer a highly effective basic protection against interference radiation. (Here an important factor is a large contact surface of the individual components of the enclosure (cover, enclosure shells).

To meet special protection requirements, the EMC compatibility can be increased by

- conductive seals,
- contact bare front surfaces as well as
- EMC compatible cable screw connections.

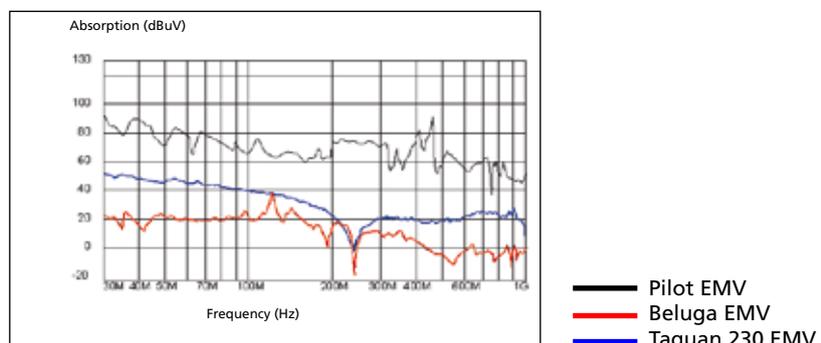



[www.klinkmann.com](http://www.klinkmann.com)

**HELSINKI**

tel. +358 9 540 4940  
info@klinkmann.fi

**ST. PETERSBURG**

tel. +7 812 327 3752  
klinkmann@klinkmann.spb.ru

**MOSCOW**

tel. +7 495 641 1616  
moscow@klinkmann.spb.ru

**YEKATERINBURG**

tel. +7 343 287 19 19  
yekaterinburg@klinkmann.spb.ru

**SAMARA**

tel. +7 846 273 95 85  
samara@klinkmann.spb.ru

**UFA**

tel. +7 347 293 70 04  
klinkmann@klinkmann.ru

**KIEV**

tel. +38 044 495 33 40  
klinkmann@klinkmann.kiev.ua

**KAZAKHSTAN**

tel. +77779994825  
sales@klinkmann.kz

**MINSK**

tel. +375 17 200 0876  
minsk@klinkmann.com

**RIGA**

tel. +371 6738 1617  
klinkmann@klinkmann.lv

**VILNIUS**

tel. +370 5 215 1646  
post@klinkmann.lt

**TALLINN**

tel. +372 668 4500  
klinkmann.est@klinkmann.ee