


# Protection tubing for cable harnesses

## PLIOZIP

**Material:** PP  
**Colours:** white, orange, black, light grey, silver  
**Operating temperatures:** -30 to +85°C (+90°C short time)  
**Dielectric strength:** >20 kV/mm  
**Flame resistance:** HB UL94  
**Chemical resistance:** good against most solvents and chemical agents, mineral fats and oils, gasoline....


**Applications:** hold and protection of cable harnesses in fixed or mobile electrical installations, especially in mechanical engineering and panel construction.

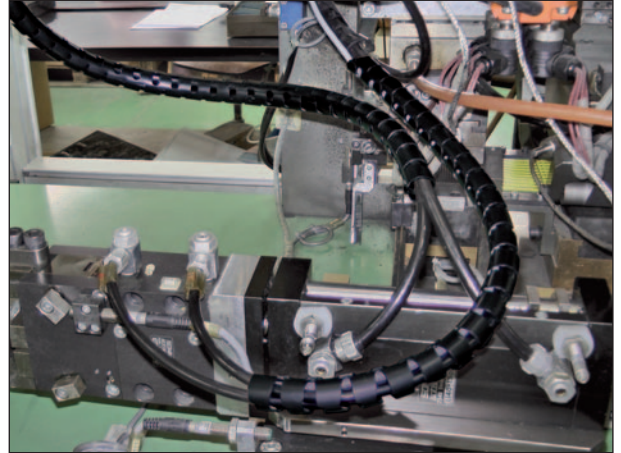

Example for order:

Colours: 001 005\* 010 025 097  
 white orange black light grey silver

code group	detail article	code colour
0820	xxxx	xxx

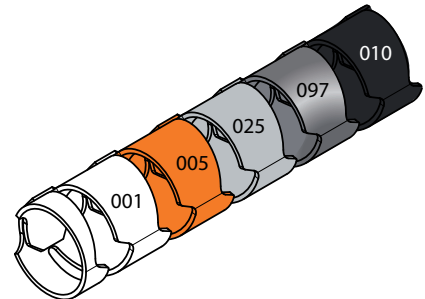

\* The orange colour is only available in coils.

### • In coils

type	art. no. in roll	nominal Ø mm	wall thickness mm	capacity Ø max. mm	m
PLIOZIP 08 PP	0820 0001 ***	8	0,8	10	100
PLIOZIP 15 PP	0820 0002 ***	15	0,8	16	50
PLIOZIP 20 PP	0820 0003 ***	20	0,9	23	30
PLIOZIP 25 PP	0820 0004 ***	25	1	25	20
PLIOZIP 32 PP	0820 0005 ***	32	1,3	32	15



### • In lengths of 2 m

type	art. no. in lengths	nominal Ø mm	wall thickness mm	capacity Ø max. mm	m
PLIOZIP 15 PP L2	0820 0012 ***	15	0,8	16	2
PLIOZIP 20 PP L2	0820 0013 ***	20	0,9	23	2
PLIOZIP 25 PP L2	0820 0014 ***	25	1	25	2



Bag available with a European suspension hole.




Other colours and lengths available upon request.

# Mounting tool for protection tubing




PLIOZIP





type	art. no.	for tubing	 pce
PLIOZIP 08	0820 0101 000	PLIOZIP 08	1
PLIOZIP 15	0820 0102 000	PLIOZIP 15	1
PLIOZIP 20/25	0820 0103 000	PLIOZIP 20 - PLIOZIP 25	1
PLIOZIP 32	0820 0105 000	PLIOZIP 32	1



In every pack there is a mounting tool in PP. These tools can be ordered additionally or as a replacement.

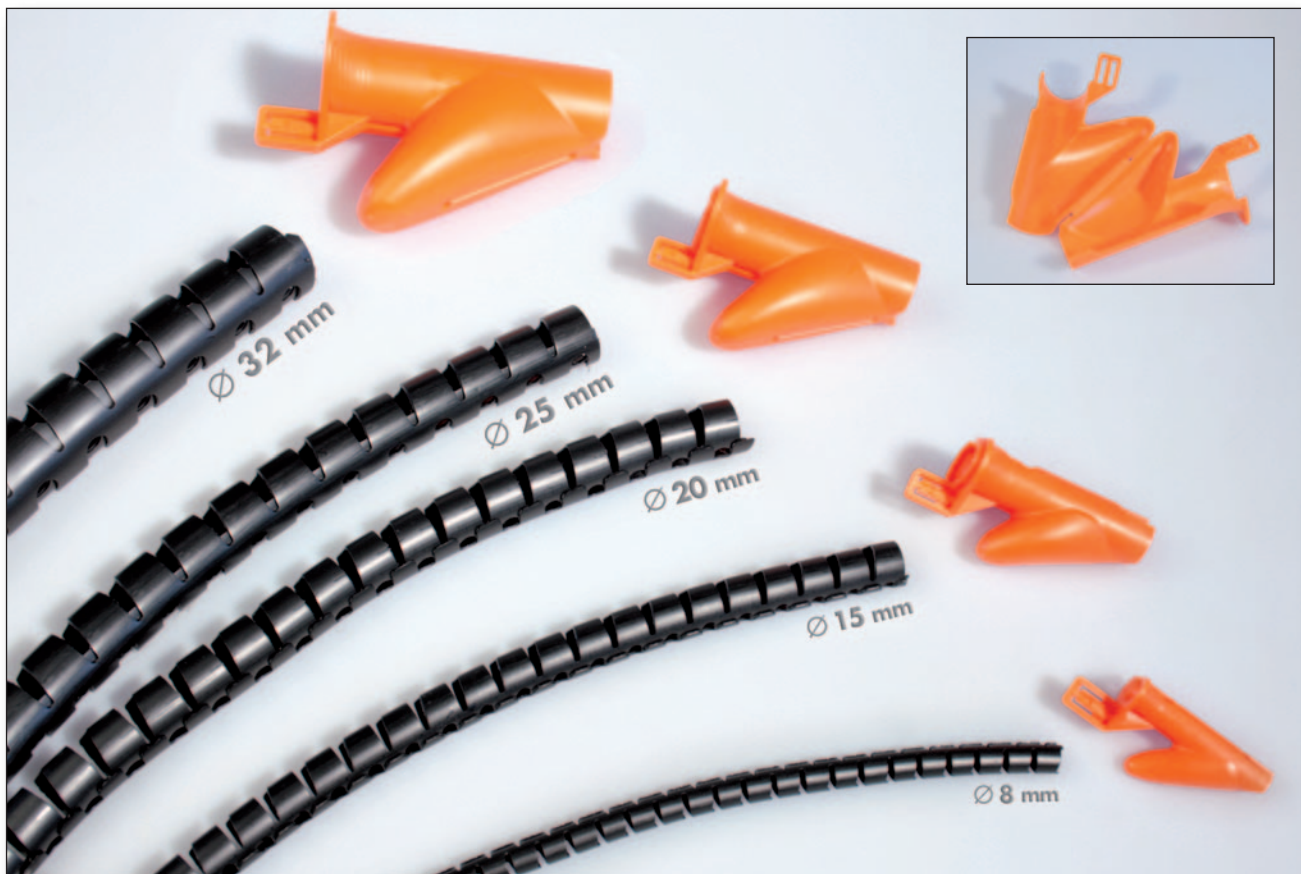

## Operating instruction



Operating  
instruction in  
video