

FLAT HEATER

CP 061 | 50 W, 100 W





- > Contact/Convection heater
- > Ultra flat design
- > Compact
- > Easy, firm installation
- > Screw fixing
- > Linear expansion compensation
- > Integrated temperature cut-out
- > Ready-to-use with strain relief

The Flat Heater CP 061 is used to provide an evenly distributed temperature within enclosures and cabinets with electric/electronic components. Its ultra-thin design makes it particularly suitable for high-density applications for which standard enclosure heaters are often too big in size. Depending on the application, the Flat Heater can be used as a convection heater or as a contact heater. When used as a contact heater it offers thermoconductive contact to a component or a cabinet wall in need to be heated. Additionally, a mounting system especially designed for the CP 061 allows for the compensation of an expansion of the heater body as a result of the heating-up when in operation. Operated as a convection heater, the slim heater CP 061 warms up the ambient air within a cabinet. The CP 061 is designed for continuous operation.



TECHNICAL DATA

Heating element	resistance heater
Temperature safety cut-out	to protect against overheating, automatic reset
Heater body	aluminium profile
Surface temperature	max. +150 °C at +25 °C (+77 °F)
Connection	silicone cable (halogen-free) 3 x 0.75 mm ² , length 1 m
Connection casing	plastic according to UL94 V-0, black
Mounting	screw fixing (M6)
Fitting position	horizontal, variable connection or vertical, connection on bottom
Dimensions	L x 100 x 8 mm
Operating/Storage temperature	-40 to +60 °C (-40 to +140 °F) / -40 to +85 °C (-40 to +185 °F)
Operating/Storage humidity	max. 90 % RH (non-condensing)
Protection type/Protection class	IP30 / I (earthed)
Note	other voltages (AC 120 V) on request

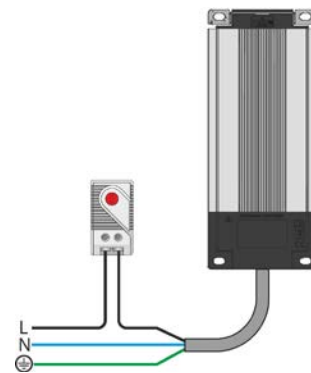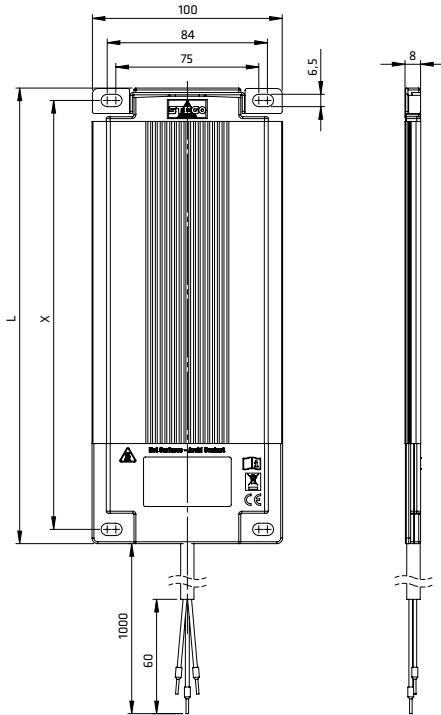

Example of connection

Art. No.	Operating voltage	Heating capacity	Length (L)	Hole spacing (X)	Weight (approx.)	Approvals	
06100.0-00	AC 230 V, 50/60 Hz	50 W	239 mm	225 mm	0.4 kg	VDE	EAC
06101.0-00	AC 230 V, 50/60 Hz	100 W	414 mm	400 mm	0.7 kg	VDE	EAC



FINLAND
info@klinkmann.fi
www.klinkmann.fi

ESTONIA
info@klinkmann.ee
www.klinkmann.ee

LATVIA
info@klinkmann.lv
www.klinkmann.lv

LITHUANIA
info@klinkmann.lt
www.klinkmann.lt

RUSSIA
klinkmann@klinkmann.ru
www.klinkmann.ru

BELARUS
minsk@klinkmann.com
www.klinkmann.by

KAZAKHSTAN
klinkmann@klinkmann.kz
www.klinkmann.kz

UKRAINE
klinkmann@klinkmann.kiev.ua
www.klinkmann.com.ua