



NP8 Series Pushbuttons

1. General

Electric ratings: AC50/60Hz, AC415V/DC250V; Degree of protection: IP65 Standard: IEC/EN60947-5-1

2. Operating conditions

- 2.1 Ambient temperature is $-5\,^\circ C \sim +40\,^\circ C$, the average temperature during 24 hours couldn't exceed $+35\,^\circ C$.
- 2.2 Altitude: \leq 2000m.
- 2.3 Atmosphere condition: Relative humidity of the atmosphere couldn't exceed 50% when the highest temperature is +40°C; much higher relative humidity is allowable under the condition of lower temperature, for example, when the temperature reaches +20°C, the relatice humidity is up to 90%. As for dews,

which contingently appear due to change of temperature, special steeps should be taken.

- 2.4 Pollution grade: 3
- 2.5 Installation category: II
- 2.6 Tightening torque is 0.8~1.2N⋅m for the cable terminals. Cross section of the cable connection is 0.5~2.5mm², and 8mm conductor length is needed.

3. Technical data

3.1 Refer to table below for rated values

related to utilization category.

AC-15	Rated operational voltage,V	415	240	120
AC-15	Rated operational current,A	1.9	3	6
DC-13	Rated operational voltage,V	250	125	-
DC-13	Rated operational current,A	0.27	0.55	-

3.2 Refer to table 3

for basic parameters of illuminated pushbutton.

Basic parameters	LED lamp
Rated operational current	≤20mA
Rated operational voltage	AC/DC 6V,12V,24V,36V,AC110V~230V

3.3 Durability

Mechanical life: Flush, mushroom-headed and illuminated version: 3×10^6 operation circles. Rotary, double-headed, self-locking and keyed version: 1×10^5 operation circles. Electric life: Flush, mushroom-headed and illuminated version:

AC 1×10^6 / DC 2.5×10^5 operation circles.

Rotary, double-headed, self-locking and key type button: $1\!\times\!10^5$ operation circles.

3.4 Short-circuit protective device: gG16

4. Features

- 4.1 Operating mechanism features bright colors and streamline surface.
- 4.2 Modular design. Operating system, adapter, contact system and illuminating system can be freely combined to realize different functions.
- 4.3 Convenient for mounting and dismounting thanks to snap-on structure.
- 4.4 Automatic locking function of the central adaptor makes it convenient and reliable for mounting and connection.
- 4.5 The terminal screw is available with anti-loosing mechanism to protect it against loosening from the body during transportation.
- 4.6 LED lamp with high brightness and long service life ensures reliable indication.



5. NP8 pushbutton

NP8- 🗆 🗆 BN/ 🗆 🗆

★ Momentary Flush Pushbutton-(Non illuminated)



	Model	Color	Y	ł
	NP8-10BN/1	0	1	-
	NP8-10BN/2		1	-
	NP8-10BN/3		1	-
	NP8-10BN/4		1	-
	NP8-10BN/5	•	1	-
1	NP8-10BN/6		1	-
NT	NP8-01BN/1	0	-	1
8 million and a second a secon	NP8-01BN/2		-	1
12	NP8-01BN/3		-	1
	NP8-01BN/4		-	1
	NP8-01BN/5	•	-	1
	NP8-01BN/6		-	1
	NP8-20BN/1	0	2	-
	NP8-20BN/2		2	-
	NP8-20BN/3		2	-
	NP8-20BN/4		2	-
	NP8-20BN/5		2	-
	NP8-20BN/6		2	-
	NP8-02BN/1	0	-	2
LL!	NP8-02BN/2		-	2
and and	NP8-02BN/3		-	2
	NP8-02BN/4		-	2
NP8 SINT SA SATY/SA TON/CA SANT SA SATY/SA TON/CA SOND 27A TOON 65447-5-1	NP8-02BN/5	•	-	2
129×C1 Θ ▼2	NP8-02BN/6		-	2
	NP8-11BN/1	\bigcirc	1	1
	NP8-11BN/2		1	1
	NP8-11BN/3		1	1
	NP8-11BN/4		1	1
	NP8-11BN/5		1	1
	NP8-11BN/6		1	1


NP8- 🗆 🗆 BN/ 🗆 🗆	Model	Color	ł	ł
	NP8-30BN/1	0	3	-
	NP8-30BN/2		3	-
	NP8-30BN/3		3	-
	NP8-30BN/4		3	-
	NP8-30BN/5	•	3	-
	NP8-30BN/6		3	-
	NP8-03BN/1	0	-	3
	NP8-03BN/2		-	3
	NP8-03BN/3	•	-	3
	NP8-03BN/4		-	3
	NP8-03BN/5	•	-	3
	NP8-03BN/6		-	3
IN THE	NP8-12BN/1	0	1	2
CHINT NP8	NP8-12BN/2		1	2
AC 16/41 SW1 3A 54/01/04 13/01/44 DC-12 25/01/274 13/01/374 DC-12 25/01/274 13/01/374	NP8-12BN/3		1	2
17 CE 1-200010 12	NP8-12BN/4		1	2
	NP8-12BN/5	•	1	2
	NP8-12BN/6		1	2
	NP8-21BN/1	0	2	1
	NP8-21BN/2		2	1
	NP8-21BN/3		2	1
	NP8-21BN/4		2	1
	NP8-21BN/5		2	1
	NP8-21BN/6		2	1


Dimension(mm)



NP8- 🗆 🗆 BND/ 🗆 🗆	Model	Color	ł	ł
	NP8-10BND/1	0	1	-
	NP8-10BND/3		1	-
	NP8-10BND/4		1	-
Constant International Constant Constan	NP8-10BND/5	•	1	-
	NP8-10BND/6		1	-
	NP8-01BND/1	0	-	1
	NP8-01BND/3		-	1
	NP8-01BND/4		-	1
	NP8-01BND/5	•	-	1
	NP8-01BND/6		-	1

Dimension(mm)





NP8- 🗆 🗆 BND/ 🗆 🗆	Model	Color	ł	ł	
	NP8-20BND/1	0	2	-	
	NP8-20BND/3		2	-	
	NP8-20BND/4		2	-	
	NP8-20BND/5		2	-	
	NP8-20BND/6		2	-	
	NP8-02BND/1	0	-	2	
	NP8-02BND/3		-	2	
A 1	NP8-02BND/4		-	2	
CHINT	NP8-02BND/5		-	2	
C C MICHAE	NP8-02BND/6		-	2	
	NP8-11BND/1	0	1	1	
	NP8-11BND/3		1	1	
	NP8-11BND/4		1	1	
	NP8-11BND/5		1	1	
	NP8-11BND/6		1	1	

(P- 401) B.2 Pushbuttons & Indicator Lights & Buzzers | Pushbuttons



NP8- 🗆 🗆 GN/ 🗆 🗆

★	Momentary	Projecting	Pushbutton-	(Non	illuminated)	
---	-----------	------------	-------------	------	--------------	--

Model	Color	ł	ł
NP8-10GN/1	0	1	-
NP8-10GN/2		1	-
NP8-10GN/3		1	-
NP8-10GN/4		1	-
NP8-10GN/5	•	1	-
NP8-10GN/6		1	-
NP8-01GN/1		-	1
NP8-01GN/2		-	1
NP8-01GN/3		-	1
NP8-01GN/4		-	1
NP8-01GN/5		-	1
NP8-01GN/6		-	1
NP8-20GN/1		2	-
NP8-20GN/2		2	-
NP8-20GN/3		2	-
NP8-20GN/4		2	-
NP8-20GN/5		2	-
NP8-20GN/6		2	-
NP8-02GN/1		-	2
NP8-02GN/2		-	2
NP8-02GN/3		-	2
NP8-02GN/4		-	2
NP8-02GN/5		-	2
NP8-02GN/6		-	2
NP8-11GN/1	\bigcirc	1	1
NP8-11GN/2		1	1
NP8-11GN/3		1	1
NP8-11GN/4		1	1
NP8-11GN/5		1	1
NP8-11GN/6		1	1


NP8- 🗆 🗆 GN/ 🗆	Model	Color	ł	ł	
	NP8-30GN/1	0	3	-	
	NP8-30GN/2		3	-	
	NP8-30GN/3		3	-	
	NP8-30GN/4		3	-	
	NP8-30GN/5		3	-	
	NP8-30GN/6		3	-	
	NP8-03GN/1	0	-	3	
	NP8-03GN/2		-	3	
	NP8-03GN/3		-	3	
	NP8-03GN/4		-	3	
	NP8-03GN/5		-	3	
	NP8-03GN/6		-	3	
	NP8-12GN/1	0	1	2	
	NP8-12GN/2		1	2	
	NP8-12GN/3		1	2	
	NP8-12GN/4		1	2	
	NP8-12GN/5		1	2	
	NP8-12GN/6		1	2	
.17	NP8-21GN/1	0	2	1	
	NP8-21GN/2		2	1	
	NP8-21GN/3		2	1	
	NP8-21GN/4		2	1	
	NP8-21GN/5		2	1	
	NP8-21GN/6		2	1	

★ Momentary Projecting Pushbutton-illuminated AC/DC6V, 12V, 24V, 36V, AC110V~230V

NP8- 🗆 🗆 GND/ 🗆	Model	Color	ł	ł
	NP8-10GND/1	0	1	-
	NP8-10GND/3		1	-
	NP8-10GND/4		1	-
	NP8-10GND/5	•	1	-
ALL DE LE	NP8-10GND/6		1	-
Ch and a star	NP8-01GND/1	0	-	1
	NP8-01GND/3		-	1
CE CE CONTRACT	NP8-01GND/4		-	1
17	NP8-01GND/5	•	-	1
	NP8-01GND/6		-	1

Dimension(mm)

67max



Dimension(mm)



NP8- 🗆 🗆 GND/ 💷	Model	Color	ł	ł
	NP8-20GND/1	0	2	-
	NP8-20GND/3		2	-
	NP8-20GND/4		2	-
	NP8-20GND/5	•	2	-
	NP8-20GND/6		2	-
	NP8-02GND/1	0	-	2
MILLI'	NP8-02GND/3		-	2
A Common and	NP8-02GND/4		-	2
CHNT	NP8-02GND/5	•	-	2
NP8	NP8-02GND/6		-	2
$\overset{\text{doctrizerwith}}{\leftarrow} \overset{\text{doctrizerwith}}{\leftarrow} \overset{\text{doctrizerwith}}{$	NP8-11GND/1	0	1	1
17	NP8-11GND/3		1	1
	NP8-11GND/4		1	1
	NP8-11GND/5	•	1	1
	NP8-11GND/6		1	1



★ Φ40 Momentary Mushroom	Pushbutton-(Non illuminated)
--------------------------	------------------------------

ł

_

_

_

NP8- 🗆 🗍 M/ 🗆	Model	Color	ł	ł
	NP8-03M/14		_	3
	NP8-03M/15	•	-	3
	NP8-03M/16		_	3
	NP8-12M/11	0	1	2
	NP8-12M/12		1	2
	NP8-12M/13		1	2
	NP8-12M/14		1	2
	NP8-12M/15	•	1	2
The	NP8-12M/16		1	2
	NP8-21M/11	0	2	1
	NP8-21M/12		2	1
	NP8-21M/13		2	1
	NP8-21M/14		2	1
	NP8-21M/15	•	2	1
	NP8-21M/16		2	1


★ Φ 60 Momentary Mushroom Pushbutton-(Non illuminated)

NP8- 🗆 🗍 M/ 🗆	Model	Color	ł	ł
	NP8-10M/21	0	1	1
	NP8-10M/22		1	-
	NP8-10M/23		1	-
	NP8-10M/24		1	-
	NP8-10M/25	•	1	_
	NP8-10M/26		1	-
C. C.	NP8-01M/21	\bigcirc	_	—
	NP8-01M/22		—	1
	NP8-01M/23		—	1
	NP8-01M/24		_	1
	NP8-01M/25		—	1
	NP8-01M/26		—	
	NP8-20M/21	\bigcirc	2	—
	NP8-20M/22		2	-
	NP8-20M/23		2	—
A REAL PROPERTY AND A REAL	NP8-20M/24		2	—
HAT NO S Martine Constant To another Constant To another To anothe	NP8-20M/25		2	—
	NP8-20M/26		2	
	NP8-02M/21	0	_	2
	NP8-02M/22		_	2

NP8- 🗆 🗆 M/ 💷	Model	Color	ł	ł
	NP8-02M/23		—	2
	NP8-02M/24		—	2
	NP8-02M/25	•	_	2
	NP8-02M/26		_	2
	NP8-11M/21	0	1	1
	NP8-11M/22	•	1	1
NP8	NP8-11M/23		1	1
	NP8-11M/24	•	1	1
	NP8-11M/25	•	1	1
	NP8-11M/26		1	1
	NP8-30M/21	0	3	_
	NP8-30M/22		3	-
	NP8-30M/23		3	-
	NP8-30M/24		3	_
	NP8-30M/25	•	3	_
	NP8-30M/26		3	_
	NP8-03M/21	0	_	3
	NP8-03M/22	•	_	3
	NP8-03M/23		-	3
	NP8-03M/24		_	3
	NP8-03M/25	•	_	3
	NP8-03M/26		_	3
THE REAL PROPERTY AND INCOMENT	NP8-12M/21	0	1	2
A Company of the	NP8-12M/22	•	1	2
CHINT -	NP8-12M/23		1	2
	NP8-12M/24		1	2
it is	NP8-12M/25	•	1	2
	NP8-12M/26		1	2
	NP8-21M/21	0	2	1
	NP8-21M/22		2	1
	NP8-21M/23		2	1
	NP8-21M/24		2	1
	NP8-21M/25		2	1
	NP8-21M/26		2	1

Dimension(mm)

NP8- 🗆 M/ 🗆



★ Φ40 Momentary Mushroom Pushbutton-illuminated AC/DC6V, 12V, 24V, 36V, AC110V~230V

NP8- 🗆 🗍 MD/ 💷	Model	Color	ł	ł
	NP8-10MD/11	0	1	-
	NP8-10MD/13		1	_
	NP8-10MD/14		1	-
	NP8-10MD/15	•	1	-
ALL DE L	NP8-10MD/16		1	_
	NP8-01MD/11	\bigcirc	-	1
	NP8-01MD/13		-	1
	NP8-01MD/14		-	1
T	NP8-01MD/15	•	-	1
	NP8-01MD/16		-	1
	NP8-20MD/11	0	2	_
	NP8-20MD/13		2	_
	NP8-20MD/14		2	_
	NP8-20MD/15	•	2	_
	NP8-20MD/16		2	_
	NP8-02MD/11	0	-	2
	NP8-02MD/13		-	2
June	NP8-02MD/14		_	2
	NP8-02MD/15	•	_	2
CHINT OF	NP8-02MD/16		_	2
ACTINICATION CONTRACT	NP8-11MD/11	0	1	1
	NP8-11MD/13		1	1
	NP8-11MD/14		1	1
	NP8-11MD/15		1	1
	NP8-11MD/16		1	1

★ Φ 60 Momentary Mushroom Pushbutton-illuminated AC/DC6V, 12V, 24V, 36V, AC110V~230V

NP8- 🗆 🗍 MD/ 🔲	Model	Color	ł	ł
	NP8-10MD/21	0	1	-
	NP8-10MD/23		1	-
	NP8-10MD/24		1	—
	NP8-10MD/25	•	1	_
	NP8-10MD/26		1	-
	NP8-01MD/21	0	_	1
CHANT S	NP8-01MD/23		_	1
Conservation of the second sec	NP8-01MD/24		_	1
	NP8-01MD/25	•	_	1
	NP8-01MD/26		_	1

NP8- 🗆 🗆 MD/ 🗆 🗆	Model	Color	ł	ł
	NP8-20MD/21	0	2	-
	NP8-20MD/23		2	-
	NP8-20MD/24		2	-
	NP8-20MD/25		2	-
	NP8-20MD/26		2	-
	NP8-02MD/21	0	-	2
	NP8-02MD/23		-	2
ALL DE	NP8-02MD/24		-	2
The	NP8-02MD/25		-	2
	NP8-02MD/26		-	2
CE CE TABLET	NP8-11MD/21	0	1	1
	NP8-11MD/23		1	1
	NP8-11MD/24		1	1
	NP8-11MD/25		1	1
	NP8-11MD/26		1	1

Φ 40 Mushroom Latching Pushbutton.turn to release (Non-illuminated)

NP8- 🗆 🗆 ZS/ 🗆	Model	Color	ł	ł
	NP8-10ZS/14	•	1	-
	NP8-01ZS/14	•	-	1


NP8- 🗆 🗆 ZS/ 🗆 🗆	Model	Color	Y	ł
	NP8-20ZS/14	•	2	-
	NP8-02ZS/14		-	2
	NP8-11ZS/14		1	1

★ Φ 60 Mushroom Latching Pushbutton.turn to release (Non-illuminated)

NP8- 🗆 🗆 ZS/ 🗆 🗆	Model	Color	ł	ł
	NP8-10ZS/24	•	1	-
	NP8-01ZS/24	•	-	1
	NP8-20ZS/24	•	2	-

Dimension(mm)

NP8- 0 MD/ 0



NP8- 🗆 🗆 ZS/ 💷	Model	Color	ł	ł
	NP8-02ZS/24	•	_	2
	NP8-11ZS/24		1	1

★ Φ 30 Mushroom Latching Pushbutton.turn to release (Non-illuminated)


NP8- 🗆 🗆 ZS/ 🗆	Model	Color	ł	ł
	NP8-10ZS/34	•	1	_
en ander av an Commente Commente	NP8-10ZS/34	•	_	1

★ Φ 30 Mrushoom Latching Pushbutton.turn to release (Non-illuminated)



Dimension(mm)

NP8- 🗆 ZS/ 🗆



★ Double-headed flush momentory button (Non-illuminated)


NP8- 🗆 S / 🗆	Lamp-Voltage	Model	Color	1	ł
Non-illuminated		NP8-20S	+	2	-
	Non-illuminated	NP8-02S	+	_	2
		NP8-11S	+	1	1


★ Double-headed flush momentory button (Illuminated)

NP8- 🗌 SD/ 🗌	Lamp-Voltage	Model	Color	Y	ł
	LED: AC/DC 6V, 12V, 24V, 36V; AC 110V ~ 230V	NP8-20SD	+	2	_
e -		NP8-02SD	+	_	2
		NP8-11SD	+	1	1

Dimension(mm)

NP8- 🗆 S/ 🗆





NP8- 🗆 SD/ 🗆

★ Light

NP8-D/ 🗌	Lamp-Voltage	Model	Color
		NP8-D/1	\bigcirc
A REAL PROPERTY AND	LED: AC/AD 6V,	NP8-D/3	
Pr	12V, 24V, 36V;	NP8-D/4	
COART NAME NAME NAME NAME NAME NAME NAME NAME	$AC110V \sim 230V$	NP8-D/5	•
		NP8-D/6	

★ Selector Switches (2 positions)-(Non-illuminated)

NP8- 🗆 X /21 🗌	Metal	Color	Selector Switches	ł	ł
	NP8-10X/211	\bigcirc		1	-
	NP8-10X/212			1	-
	NP8-10X/213			1	-
	NP8-10X/214			1	-
	NP8-10X/215		٦	1	-
	NP8-10X/216		$\neg \land \land$	1	-
	NP8-01X/211	0	\neg	-	1
CHNT -	NP8-01X/212			-	1
ACTIVITY IN A SUPPLY OF A	NP8-01X/213			-	1
	NP8-01X/214			-	1
	NP8-01X/215		_	-	1
	NP8-01X/216			-	1
NP8- 🗆 X /21 🗌	Metal	Color	Selector Switches	ł	ł
	NP8-10X/221	\bigcirc		1	-
	NP8-10X/222			1	-
	NP8-10X/223			1	-
	NP8-10X/224			1	-
	NP8-10X/225			1	-
	NP8-10X/226		_	1	-
	NP8-01X/221	Ō	_	-	1
I com	NP8-01X/222		_	-	1
NP8 (C) NP8 (C	NP8-01X/223	Ŏ		-	1
GBT SIGNAL Imanuel W	NP8-01X/224		\neg	-	1
	NP8-01X/225			-	1
	NP8-01X/226		_	-	1
NP8- 🗆 🗆 X /31 🗆	Metal	Color	Selector Switches	ł	ł
	NP8-20X/211	0		2	-
	NP8-20X/212	Ĭ	-	2	-
	NP8-20X/213		_	2	-
	NP8-20X/214			2	-
	NP8-20X/215		_	2	-
	NP8-20X/216		-	2	-
	NP8-02X/211	Õ		-	2
	NP8-02X/212		-	-	2
THE P	NP8-02X/213		-	-	2
	NP8-02X/214		-	-	2
CHINT CHINT	NP8-02X/215		1, ,	-	2
AC-15-13/11 ALSOFACE DOMINAN PC-15-258/V02731 (JUNIOLAS) GBUT SLOPES 	NP8-02X/216		\neg	-	2
1			$ \sim$	L	

NP8-11X/211 NP8-11X/212

NP8-11X/213

NP8-11X/214

NP8-11X/215

NP8-11X/216

1

1

1


1

1

1

1

1



NP8- 🗆 🗆 X22/ 🗆	Metal	Color	Selector Switches	ł	ł
	NP8-20X/221	0		2	-
	NP8-20X/222			2	-
	NP8-20X/223			2	-
	NP8-20X/224			2	-
	NP8-20X/225			2	-
	NP8-20X/226			2	-
	NP8-02X/221	0		, -	2
	NP8-02X/222		$\neg \setminus \angle$	-	2
	NP8-02X/223			-	2
IL COL	NP8-02X/224			-	2
NP8 @	NP8-02X/225			-	2
00-12 2007 14248.5 00/7 14248.5 1	NP8-02X/226			-	2
	NP8-11X/221	0		1	1
	NP8-11X/222			1	1
	NP8-11X/223			1	1
	NP8-11X/224			1	1
	NP8-11X/225			1	1
	NP8-11X/226			1	1


★ Selector Switches (3 positions)-(Non-illuminated)

NP8- 🗌 X /31 🗌	Metal	Color	Selector Switches	ł	ł
	NP8-20X/311	0		2	-
	NP8-20X/312			2	-
	NP8-20X/313			2	-
	NP8-20X/314			2	-
	NP8-20X/315	•		2	-
	NP8-20X/316			2	-
	NP8-02X/311	0		-	2
	NP8-02X/312	-02X/312		-	2
La catal	NP8-02X/313			-	2
	NP8-02X/314			-	2
CHINT - L	NP8-02X/315	•		-	2
AC IN ATTICE & A DANIER INFORMATION OF THE ACTION OF THE A	NP8-02X/316			-	2
	NP8-11X/311	0		1	1
	NP8-11X/312			1	1
	NP8-11X/313			1	1
	NP8-11X/314]	1	1
	NP8-11X/315			1	1
	NP8-11X/316			1	1

NP8- 🗆 X/33 🗆	Metal	Color	Selector Switches	ł	ł
	NP8-20X/331	0		2	-
	NP8-20X/332			2	-
	NP8-20X/333			2	
	NP8-20X/334			2	-
	NP8-20X/335			2	-
	NP8-20X/336			2	-
	NP8-02X/331	0		_	2
	NP8-02X/332			_	2
	NP8-02X/333			_	2
A The second	NP8-02X/334			_	2
CHNT-	NP8-02X/335		-	_	2
NP8 (C) A CONTRACTOR TOWNAL CONTRACTOR TOWNAL CO	NP8-02X/336		-	_	2
17 GAT 1000	NP8-11X/331	Ō	-	1	1
	NP8-11X/332	ŏ	-	1	1
	NP8-11X/333		-	1	1
	NP8-11X/334		-	1	1
			_	1	1
	NP8-11X/335		_	1	1
	NP8-11X/336				
NP8- 🗆 🗆 X/37 🗖	Metal	Color	Selector Switches	Y	ł
	NP8-20X/371	0	_	2	
	NP8-20X/372			2	-
	NP8-20X/373			2	-
	NP8-20X/374			2	
	NP8-20X/375			2	
	NP8-20X/376			2	-
	NP8-02X/371	\bigcirc		_	2
	NP8-02X/372			_	2
	NP8-02X/373			_	2
and the second	NP8-02X/374			_	2
N CHANT-	NP8-02X/375			_	2
NP8 ()	NP8-02X/376		-	_	2
to any sector r-annel m	NP8-11X/371	Ō	-	1	1
-	NP8-11X/372	Ŏ	-	1	1
	NP8-11X/373		-	1	1
	NP8-11X/374		-	1	1
	NP8-11X/375		-	1	1
	NP8-11X/376		_	1	1
	110 11/0/0/0				1.1
	Metal	Color	Selector		ķ
	_	Color	Selector Switches	{	}
	Metal NP8-20X/381 NP8-20X/382			\ 2	}
	NP8-20X/381 NP8-20X/382			2 2	}
	NP8-20X/381 NP8-20X/382 NP8-20X/383			2 2 2 2	}
NP8- 🔲 X/38 🗌	NP8-20X/381 NP8-20X/382 NP8-20X/383 NP8-20X/384			2 2 2 2 2	}
	NP8-20X/381 NP8-20X/382 NP8-20X/383 NP8-20X/384 NP8-20X/385			2 2 2 2 2 2 2 2	}
	NP8-20X/381 NP8-20X/382 NP8-20X/383 NP8-20X/383 NP8-20X/385 NP8-20X/386			2 2 2 2 2	
	NP8-20X/381 NP8-20X/382 NP8-20X/383 NP8-20X/384 NP8-20X/385 NP8-20X/386 NP8-20X/381			2 2 2 2 2 2 2 2	 2
	NP8-20X/381 NP8-20X/382 NP8-20X/383 NP8-20X/384 NP8-20X/385 NP8-20X/386 NP8-20X/381 NP8-02X/381			2 2 2 2 2 2 2 2	 2 2
	NP8-20X/381 NP8-20X/382 NP8-20X/383 NP8-20X/384 NP8-20X/385 NP8-20X/385 NP8-20X/386 NP8-02X/381 NP8-02X/382 NP8-02X/383	 		2 2 2 2 2 2 2 2	
	NP8-20X/381 NP8-20X/382 NP8-20X/383 NP8-20X/384 NP8-20X/385 NP8-20X/385 NP8-02X/381 NP8-02X/383 NP8-02X/383			2 2 2 2 2 2 2 2	 2 2 2 2 2 2 2
	NP8-20X/381 NP8-20X/382 NP8-20X/383 NP8-20X/384 NP8-20X/385 NP8-20X/385 NP8-02X/381 NP8-02X/383 NP8-02X/383 NP8-02X/385	 		2 2 2 2 2 2 2 2	
	NP8-20X/381 NP8-20X/382 NP8-20X/383 NP8-20X/383 NP8-20X/385 NP8-20X/385 NP8-02X/381 NP8-02X/382 NP8-02X/383 NP8-02X/385 NP8-02X/386	 		2 2 2 2 2 2 2 2	 2 2 2 2 2 2 2
	NP8-20X/381 NP8-20X/382 NP8-20X/383 NP8-20X/384 NP8-20X/385 NP8-20X/385 NP8-02X/381 NP8-02X/383 NP8-02X/383 NP8-02X/385	 		2 2 2 2 2 2 2 2	
	NP8-20X/381 NP8-20X/382 NP8-20X/383 NP8-20X/383 NP8-20X/385 NP8-20X/385 NP8-02X/381 NP8-02X/382 NP8-02X/383 NP8-02X/385 NP8-02X/386	 		2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2	
	NP8-20X/381 NP8-20X/382 NP8-20X/383 NP8-20X/383 NP8-20X/385 NP8-20X/385 NP8-02X/381 NP8-02X/382 NP8-02X/383 NP8-02X/385 NP8-02X/386 NP8-02X/386	 		2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2	
NPB- D X/38 D	NP8-20X/381 NP8-20X/382 NP8-20X/383 NP8-20X/383 NP8-20X/385 NP8-20X/385 NP8-02X/381 NP8-02X/381 NP8-02X/383 NP8-02X/384 NP8-02X/385 NP8-02X/386 NP8-11X/381 NP8-11X/382	 		2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2	
	NP8-20X/381 NP8-20X/382 NP8-20X/383 NP8-20X/383 NP8-20X/384 NP8-20X/385 NP8-20X/386 NP8-02X/381 NP8-02X/382 NP8-02X/383 NP8-02X/384 NP8-02X/385 NP8-02X/385 NP8-02X/385 NP8-02X/385 NP8-02X/385 NP8-011X/381 NP8-11X/383	 		2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2	

★ Selector Switches (2 positions) -(Illuminated) AC/DC6V, 12V, 24V, 36V, AC110V~230V

NP8- 🗆 🗆 XD /21 🗆	Metal	Color	Selector Switches	ł	ł
	NP8-10XD/211	\bigcirc		1	_
	NP8-10XD/213		-	1	_
	NP8-10XD/214		-	1	_
	NP8-10XD/215		-	1	_
	NP8-10XD/216			1	-
G L Ann	NP8-01XD/211	Ō		_	1
CHNT -	NP8-01XD/213			_	1
NP8 AC I A STREET A STREET A STREET SC 12 STREET OUT SAME S OUT SAME S	NP8-01XD/214		-	_	1
17 12	NP8-01XD/215		-	_	1
	NP8-01XD/216		-	_	1
NP8- 🗆 🗆 XD/22 🗆	Metal	Color	Selector Switches	ł	ł
	NP8-10XD/221	\bigcirc		1	-
	NP8-10XD/223		-	1	_
	NP8-10XD/224		_	1	_
	NP8-10XD/225		1	1	_
	NP8-10XD/226		1	1	_
of the second	NP8-01XD/221	\overline{O}		_	1
CHNT	NP8-01XD/223		$\langle \rangle$	_	1
NPG as series over AC 14 articles and a read as a Secion and a read as a Secion and a read as a Construction of the secion of the secient of the secien	NP8-01XD/224			_	1
1	NP8-01XD/225			_	1
	NP8-01XD/226		-	_	1
NP8- 🗆 XD /21 🗆	Metal	Color	Selector Switches	ł	ł
	NP8-20XD/211	\bigcirc		2	_
	NP8-20XD/213			2	_
	NP8-20XD/214		-	2	_
	NP8-20XD/215		-	2	_
	NP8-20XD/216			2	_
	NP8-02XD/211	\bigcirc		_	2
	NP8-02XD/213			_	2
	NP8-02XD/214			_	2
CHNT-	NP8-02XD/215			_	2
NP8 Contention to average to aver	NP8-02XD/216		Ĵ	_	2
17 12	NP8-11XD/211		-		
IT	INPO-TIAD/211	\bigcirc		1	1
	NP8-11XD/213		_	1	1
-			-		1
-	NP8-11XD/213		-	1	
	NP8-11XD/213 NP8-11XD/214		-	1	1
NP8 XD/22	NP8-11XD/213 NP8-11XD/214 NP8-11XD/215	Color	Selector Switches	1 1 1	1 1 1
	NP8-11XD/213 NP8-11XD/214 NP8-11XD/215 NP8-11XD/216	Color		1 1 1 1	1 1 1 1
	NP8-11XD/213 NP8-11XD/214 NP8-11XD/215 NP8-11XD/216 Metal	Color		1 1 1 1	1 1 1 1
	NP8-11XD/213 NP8-11XD/214 NP8-11XD/215 NP8-11XD/216 Metal NP8-20XD/221	Color Color 0 0 0 0 0 0 0 0 0 0 0 0 0		1 1 1 1 2	1 1 1 1
	NP8-11XD/213 NP8-11XD/214 NP8-11XD/215 NP8-11XD/216 Metal NP8-20XD/221 NP8-20XD/223	Color Color		1 1 1 1 2 2	1 1 1 1
	NP8-11XD/213 NP8-11XD/214 NP8-11XD/215 NP8-11XD/216 Metal NP8-20XD/221 NP8-20XD/223 NP8-20XD/224	Color Color		1 1 1 1 2 2 2 2	1 1 1 1
	NP8-11XD/213 NP8-11XD/214 NP8-11XD/215 NP8-11XD/216 Metal NP8-20XD/221 NP8-20XD/223 NP8-20XD/224 NP8-20XD/225	Color Color 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0		1 1 1 1 2 2 2 2 2 2	1 1 1 1
	NP8-11XD/213 NP8-11XD/214 NP8-11XD/215 NP8-11XD/216 Metal NP8-20XD/221 NP8-20XD/223 NP8-20XD/224 NP8-20XD/225 NP8-20XD/226	Color Color 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0		1 1 1 1 2 2 2 2 2 2	1 1 1
	NP8-11XD/213 NP8-11XD/214 NP8-11XD/215 NP8-11XD/216 Metal NP8-20XD/221 NP8-20XD/223 NP8-20XD/224 NP8-20XD/225 NP8-20XD/226 NP8-20XD/221	O O		1 1 1 1 2 2 2 2 2 2	1 1 1
	NP8-11XD/213 NP8-11XD/214 NP8-11XD/215 NP8-11XD/216 Metal NP8-20XD/221 NP8-20XD/223 NP8-20XD/224 NP8-20XD/225 NP8-20XD/226 NP8-20XD/221 NP8-20XD/225 NP8-02XD/225 NP8-02XD/221 NP8-02XD/223	O O		1 1 1 1 2 2 2 2 2 2	1 1 1
	NP8-11XD/213 NP8-11XD/214 NP8-11XD/215 NP8-11XD/216 Metal NP8-20XD/221 NP8-20XD/223 NP8-20XD/224 NP8-20XD/225 NP8-20XD/226 NP8-02XD/221 NP8-02XD/224 NP8-02XD/225 NP8-02XD/224 NP8-02XD/224 NP8-02XD/224	 O O		1 1 1 1 2 2 2 2 2 2	1 1 1 1
	NP8-11XD/213 NP8-11XD/214 NP8-11XD/215 NP8-11XD/216 Metal NP8-20XD/221 NP8-20XD/223 NP8-20XD/224 NP8-20XD/225 NP8-20XD/226 NP8-02XD/221 NP8-02XD/223 NP8-02XD/224 NP8-02XD/224 NP8-02XD/224 NP8-02XD/225 NP8-02XD/224 NP8-02XD/225 NP8-02XD/225	O O <td< td=""><td></td><td>1 1 1 1 2 2 2 2 2 2</td><td>1 1 1 </td></td<>		1 1 1 1 2 2 2 2 2 2	1 1 1
	NP8-11XD/213 NP8-11XD/214 NP8-11XD/214 NP8-11XD/215 NP8-11XD/216 Metal NP8-20XD/221 NP8-20XD/223 NP8-20XD/224 NP8-20XD/225 NP8-20XD/226 NP8-02XD/223 NP8-02XD/224 NP8-02XD/225 NP8-02XD/224 NP8-02XD/225 NP8-02XD/225 NP8-02XD/225 NP8-02XD/225 NP8-02XD/225 NP8-02XD/225 NP8-02XD/225 NP8-02XD/225	O O <td< td=""><td></td><td>1 1 1 1 2 2 2 2 2 2 2 2 2</td><td>1 1 1 </td></td<>		1 1 1 1 2 2 2 2 2 2 2 2 2	1 1 1
	NP8-11XD/213 NP8-11XD/214 NP8-11XD/215 NP8-11XD/216 Metal NP8-20XD/221 NP8-20XD/223 NP8-20XD/224 NP8-20XD/225 NP8-20XD/226 NP8-02XD/221 NP8-02XD/223 NP8-02XD/224 NP8-02XD/225 NP8-02XD/226 NP8-02XD/223 NP8-02XD/224 NP8-02XD/225 NP8-02XD/224 NP8-02XD/224 NP8-02XD/225 NP8-02XD/224 NP8-02XD/224 NP8-02XD/225 NP8-02XD/224 NP8-02XD/224 NP8-02XD/224 NP8-02XD/225 NP8-02XD/224 NP8-02XD/225 NP8-02XD/224	 O O<		1 1 1 1 2 2 2 2 2 2 2 2 2 1 1	1 1 1
	NP8-11XD/213 NP8-11XD/214 NP8-11XD/215 NP8-11XD/216 Metal NP8-20XD/221 NP8-20XD/223 NP8-20XD/224 NP8-20XD/225 NP8-20XD/224 NP8-02XD/223 NP8-02XD/224 NP8-02XD/225 NP8-02XD/224 NP8-02XD/225 NP8-02XD/225 NP8-02XD/226 NP8-02XD/225 NP8-11XD/221 NP8-11XD/223	 Color <		1 1 1 1 2 2 2 2 2 2 2 2 2 1 1 1	1 1 1

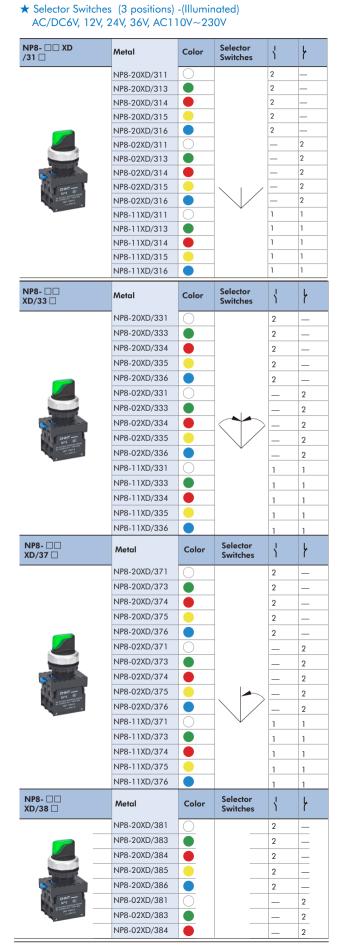


NP8-02XD/	385		-	_	2
NP8-02XD/	386		-	_	2
NP8-11XD/	381		1	I	1
NP8-11XD/	383 🔵		1	I	1
NP8-11XD/	384 🔴	$\neg \setminus $	/ [I	1
NP8-11XD/	385 😑	\neg \vee	1	I	1
NP8-11XD/	386		1	1	1


★ Key Switches (2 positions)-(Non-illuminated)


NP8 🗆 Y /21	Metal	Key Switches	ł	ł
	NP8-10Y/21	× ×	1	_
and a construction of the	NP8-01Y/21		_	1
NP8- 🗆 🖓 Y/22	Metal	Key Switches	ł	ł
	NP8-10Y/22		1	_
Certain Contraction	NP8-01Y/22		_	1
NP8 🗆 Y /21	Metal	Key Switches	ł	ł
	NP8-20Y/21		2	_
	NP8-02Y/21	× ×	_	2
And Southern	NP8-11Y/21		1	1
NP8- 🗆 🗆 Y/22	Metal	Key Switches	ł	ł
	NP8-20Y/22		2	_
	NP8-02Y/22		_	2
Comments	NP8-11Y/22		1	1

Dimensions(mm)


NP8- 🗆 XD/ 🗆






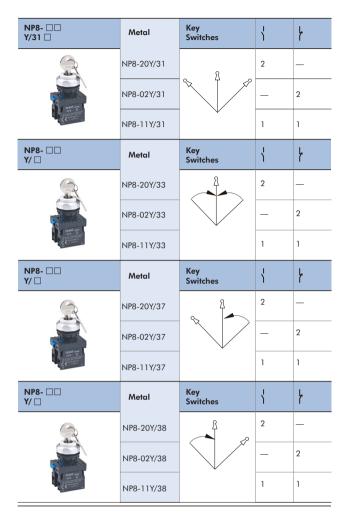

★ Key Switches (3 positions)-(Non-illuminated)







NP8-English Warning Label Φ 60




NP2,NP8,ND16 Installation tool



NP8 Basement







Dimensions(mm)

Dimensions(mm)

NP8- 🗆 🗆 X/ 🗆



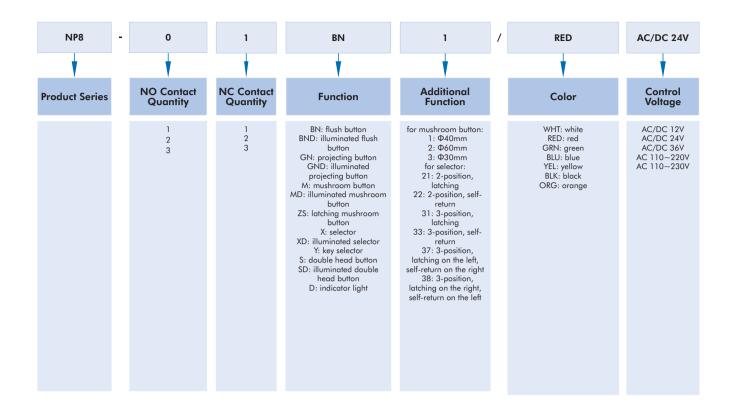

(P- 411) B.2 Pushbuttons & Indicator Lights & Buzzers | Pushbuttons

Туре	Color or Function	Contact	Model Description	Code
Illuminated flush button	Green, AC 110V-220V LED	2 NC	NP8-02BND GRN AC 110V-220V	667253
Illuminated flush button	Green, AC 110V-230V LED	2 NC	NP8-02BND GRN AC 110V-230V	667586
Illuminated flush button	Green, AC/DC 24V LED	2 NC	NP8-02BND GRN AC/DC 24V	667242
Illuminated flush button	Blue, AC 110V-220V LED	2 NC	NP8-02BND BLU AC 110V-220V	667256
Illuminated flush button	Blue, AC 110V-230V LED	2 NC	NP8-02BND BLU AC 110V-230V	667589
Illuminated flush button	Yellow, AC 110V-220V LED	2 NC	NP8-02BND YEL AC 110V-220V	667255
Illuminated flush button	Yellow, AC 110V-230V LED	2 NC	NP8-02BND YEL AC 110V-230V	667588
Projecting button	Red	2 NC	NP8-02GN RED	667295
Projecting button	Green	2 NC	NP8-02GN GRN	667294
Illuminated projecting button	Red, AC 110V-220V LED	2 NC	NP8-02GND RED AC 110V-220V	667315
Illuminated projecting button	Red, AC 110V-230V LED	2 NC	NP8-02GND RED AC 110V-230V	667610
Illuminated projecting button	Red, AC/DC 24V LED	2 NC	NP8-02GND RED AC/DC 24V	667305
Illuminated projecting button	Green, AC 110V-220V LED	2 NC	NP8-02GND GRN AC 110V-220V	667314
Illuminated projecting button	Green, AC 110V-230V LED	2 NC	NP8-02GND GRN AC 110V-230V	667609
Illuminated projecting button	Green, AC/DC 24V LED	2 NC	NP8-02GND GRN AC/DC 24V	667304
Mushroom button	Red, Φ40mm	2 NC	NP8-02M/1 RED	667267
Mushroom button	Green, Φ40mm	2 NC	NP8-02M/1 GRN	667266
Mushroom button	Red, Φ60mm	2 NC	NP8-02M/2 RED	667860
Illuminated mushroom button	Red, Φ40mm, AC 110V-220V LED	2 NC	NP8-02MD/1 RED AC 110V-220V	667287
Illuminated mushroom button	Red, Φ40mm, AC 110V-230V LED	2 NC	NP8-02MD/1 RED AC 110V-230V	667600
Illuminated mushroom button	Red, Φ40mm, AC/DC 24V LED	2 NC	NP8-02MD/1 RED AC/DC 24V	667277
Illuminated mushroom button	Green, Φ40mm, AC 110V-220V LED	2 NC	NP8-02MD/1 GRN AC 110V-220V	667286
Illuminated mushroom button	Green, Φ40mm, AC 110V-230V LED	2 NC	NP8-02MD/1 GRN AC 110V-230V	667599
Illuminated mushroom button	Green, Φ40mm, AC/DC 24V LED	2 NC	NP8-02MD/1 GRN AC/DC 24V	667276
Illuminated mushroom button	Red, Φ60mm, AC 110V-220V LED	2 NC	NP8-02MD/2 RED AC 110V-220V	667366
Illuminated mushroom button	Red, Φ60mm, AC 110V-230V LED	2 NC	NP8-02MD/2 RED AC 110V-230V	667635
Illuminated mushroom button	Green, Φ60mm, AC 110V-220V LED	2 NC	NP8-02MD/2 GRN AC 110V-220V	578634
Illuminated mushroom button	Green, Φ60mm, AC 110V-230V LED	2 NC	NP8-02MD/2 GRN AC 110V-230V	667636
Double headed button	1 green and 1 red flush button	2 NC	NP8-02S	667318
Illuminated double headed button	1 green and 1 red flush button, 1 orange pilot light, AC 110V-220V LED	2 NC	NP8-02SD ORG AC 110V-220V	667357
Illuminated double headed button	1 green and 1 red flush button, 1 orange pilot light, AC/DC 24V LED	2 NC	NP8-02SD ORG AC/DC 24V	667351
Illuminated double headed button	1 green and 1 red flush button, 1 white pilot light, AC 110V-220V LED	2 NC	NP8-02SD WHT AC 110V-220V	667356
Illuminated double headed button	1 green and 1 red flush button, 1 white pilot light, AC 110V-230V LED	2 NC	NP8-02SD WHT AC 110V-230V	667626
Illuminated double headed button	1 green and 1 red flush button, 1 white pilot light, AC/DC 24V LED	2 NC	NP8-02SD WHT AC/DC 24V	667350
Illuminated double headed button	1 green and 1 red flush button, 1 red pilot light, AC 110V-220V LED	2 NC	NP8-02SD RED AC 110V-220V	667358
Illuminated double headed button	1 green and 1 red flush button, 1 red pilot light, AC 110V-230V LED	2 NC	NP8-02SD RED AC 110V-230V	667627
Illuminated double headed button	1 green and 1 red flush button, 1 red pilot light, AC/DC 24V LED	2 NC	NP8-02SD RED AC/DC 24V	667352
Illuminated double headed button	1 green and 1 red flush button, 1 green pilot light, AC 110V-220V LED	2 NC	NP8-02SD GRN AC 110V-220V	667361
Illuminated double headed button	1 green and 1 red flush button, 1 green pilot light, AC 110V-230V LED	2 NC	NP8-02SD GRN AC 110V-230V	667630
Illuminated double headed button	1 green and 1 red flush button, 1 green pilot light, AC/DC 24V LED	2 NC	NP8-02SD GRN AC/DC 24V	667355
				(17010
Illuminated double headed button	1 green and 1 red flush button, 1 blue pilot light, AC 110V-220V LED	2 NC	NP8-02SD BLU AC 110V-220V	667360
Illuminated double headed button		2 NC 2 NC	NP8-02SD BLU AC 110V-220V NP8-02SD BLU AC 110V-230V	667629
	AC 110V-220V LED 1 green and 1 red flush button, 1 blue pilot light,			

Туре	Color or Function	Contact	Model Description	Code
Illuminated double headed button	1 green and 1 red flush button, 1 yellow pilot light, AC 110V-230V LED	2 NC	NP8-02SD YEL AC 110V-230V	667628
Illuminated double headed button	1 green and 1 red flush button, 1 yellow pilot light, AC/ DC 24V LED	2 NC	NP8-02SD YEL AC/DC 24V	667353
Selector	Red, 2-position, latching	2 NC	NP8-02X/21 RED	667223
Selector	Green, 2-position, latching	2 NC	NP8-02X/21 GRN	667222
Selector	White, 2-position, self-return	2 NC	NP8-02X/22 WHT	578782
Selector	Red, 2-position, self-return	2 NC	NP8-02X/22 RED	578745
Selector	Green, 2-position, self-return	2 NC	NP8-02X/22 GRN	578744
Selector	Blue, 2-position, self-return	2 NC	NP8-02X/22 BLU	578785
Selector	Yellow, 2-position, self-return	2 NC	NP8-02X/22 YEL	578784
Selector	Black, 2-position, self-return	2 NC	NP8-02X/22 BLK	578783
Selector	Red, 3-position, latching	2 NC	NP8-02X/31 RED	667227
Selector	Green, 3-position, latching	2 NC	NP8-02X/31 GRN	667226
Selector	Black, 3-position, latching	2 NC	NP8-02X/31 BLK	578965
Selector	White, 3-position, self-return	2 NC	NP8-02X/33 WHT	578839
Selector	Red, 3-position, self-return	2 NC	NP8-02X/33 RED	578757
Selector	Green, 3-position, self-return	2 NC	NP8-02X/33 GRN	578754
Selector	Blue, 3-position, self-return	2 NC	NP8-02X/33 BLU	578848
Selector	Yellow, 3-position, self-return	2 NC	NP8-02X/33 YEL	578845
Selector	Black, 3-position, self-return	2 NC	NP8-02X/33 BLK	578842
Selector	White, 3-position, latching on the left, self-return on the right	2 NC	NP8-02X/37 WHT	578840
Selector	Red, 3-position, latching on the left, self-return on the right	2 NC	NP8-02X/37 RED	578758
Selector	Green, 3-position, latching on the left, self-return on the right	2 NC	NP8-02X/37 GRN	578755
Selector	Blue, 3-position, latching on the left, self-return on the right	2 NC	NP8-02X/37 BLU	578849
Selector	Yellow, 3-position, latching on the left, self-return on the right	2 NC	NP8-02X/37 YEL	578846
Selector	Black, 3-position, latching on the left, self-return on the right	2 NC	NP8-02X/37 BLK	578843
Selector	White, 3-position, latching on the right, self-return on the left	2 NC	NP8-02X/38 WHT	578841
Selector	Red, 3-position, latching on the right, self-return on the left	2 NC	NP8-02X/38 RED	578759
Selector	Green, 3-position, latching on the right, self-return on the left	2 NC	NP8-02X/38 GRN	578756
Selector	Blue, 3-position, latching on the right, self-return on the left Yellow, 3-position, latching on the right, self-return on	2 NC	NP8-02X/38 BLU	578850
Selector	the left Black, 3-position, latching on the right, self-return on the	2 NC	NP8-02X/38 YEL	578847
Selector	left	2 NC	NP8-02X/38 BLK	578844
Illuminated selector	Red, 2-position, latching, AC 110V-220V LED	2 NC	NP8-02XD/21 RED AC 110V-220V	667203
Illuminated selector	Red, 2-position, latching, AC 110V-230V LED	2 NC	NP8-02XD/21 RED AC 110V-230V	667572
Illuminated selector	Red, 2-position, latching, AC/DC 24V LED	2 NC	NP8-02XD/21 RED AC/DC 24V	667191
Illuminated selector	Green, 2-position, latching, AC 110V-220V LED	2 NC	NP8-02XD/21 GRN AC 110V-220V	667202
Illuminated selector	Green, 2-position, latching, AC 110V-230V LED	2 NC	NP8-02XD/21 GRN AC 110V-230V	667571
Illuminated selector	Green, 2-position, latching, AC/DC 24V LED	2 NC	NP8-02XD/21 GRN AC/DC 24V	667190
Illuminated selector	Orange, 2-position, self-return, AC/DC 24V LED	2 NC	NP8-02XD/22 ORG AC/DC 24V	578817
Illuminated selector	Orange, 2-position, self-return, AC 110V-220V LED	2 NC	NP8-02XD/22 ORG AC 110V-220V	578821
Illuminated selector	White, 2-position, self-return, AC/DC 24V LED	2 NC	NP8-02XD/22 WHT AC/DC 24V	578814
Illuminated selector	White, 2-position, self-return, AC 110V-220V LED	2 NC	NP8-02XD/22 WHT AC 110V-220V	578818
Illuminated selector	White, 2-position, self-return, AC 110V-230V LED	2 NC	NP8-02XD/22 WHT AC110V-230V	667683
Illuminated selector	Red, 2-position, self-return, AC/DC 24V LED	2 NC	NP8-02XD/22 RED AC/DC 24V	578689
monimuleu seleciul	ACT DC 24V LLD	2110	1 1 5-02/10/22 NED AC/DC 244	57 5007

(P- 413) B.2 Pushbuttons & Indicator Lights & Buzzers | Pushbuttons

Туре	Color or Function	Contact	Model Description	Code
Illuminated selector	Red, 2-position, self-return, AC 110V-230V LED	2 NC	NP8-02XD/22 RED AC110V-230V	667653
Illuminated selector	Green, 2-position, self-return, AC/DC 24V LED	2 NC	NP8-02XD/22 GRN AC/DC 24V	578688
Illuminated selector	Green, 2-position, self-return, AC 110V-220V LED	2 NC	NP8-02XD/22 GRN AC 110V-220V	578716
Illuminated selector	Green, 2-position, self-return, AC 110V-230V LED	2 NC	NP8-02XD/22 GRN AC110V-230V	667652
Illuminated selector	Blue, 2-position, self-return, AC/DC 24V LED	2 NC	NP8-02XD/22 BLU AC/DC 24V	578816
Illuminated selector	Blue, 2-position, self-return, AC 110V-220V LED	2 NC	NP8-02XD/22 BLU AC 110V-220V	578820
Illuminated selector	Blue, 2-position, self-return, AC 110V-230V LED	2 NC	NP8-02XD/22 BLU AC110V-230V	667685
Illuminated selector	Yellow, 2-position, self-return, AC/DC 24V LED	2 NC	NP8-02XD/22 YEL AC/DC 24V	578815
Illuminated selector	Yellow, 2-position, self-return, AC 110V-220V LED	2 NC	NP8-02XD/22 YEL AC 110V-220V	578819
Illuminated selector	Yellow, 2-position, self-return, AC 110V-230V LED	2 NC	NP8-02XD/22 YEL AC110V-230V	667684
Illuminated selector	Red, 3-position, latching, AC 110V-220V LED	2 NC	NP8-02XD/31 RED AC 110V-220V	667207
Illuminated selector	Red, 3-position, latching, AC 110V-230V LED	2 NC	NP8-02XD/31 RED AC 110V-230V	667576
Illuminated selector	Red, 3-position, latching, AC/DC 24V LED	2 NC	NP8-02XD/31 RED AC/DC 24V	667195
Illuminated selector	Green, 3-position, latching, AC 110V-220V LED	2 NC	NP8-02XD/31 GRN AC 110V-220V	667206
Illuminated selector	Green, 3-position, latching, AC 110V-230V LED	2 NC	NP8-02XD/31 GRN AC 110V-230V	667575
Illuminated selector	Green, 3-position, latching, AC/DC 24V LED	2 NC	NP8-02XD/31 GRN AC/DC 24V	667194
Illuminated selector	Orange, 3-position, self-return, AC/DC 24V LED	2 NC	NP8-02XD/33 ORG AC/DC 24V	578893
Illuminated selector	Orange, 3-position, self-return, AC 110V-220V LED	2 NC	NP8-02XD/33 ORG AC 110V-220V	578905
Illuminated selector	White, 3-position, self-return, AC/DC 24V LED	2 NC	NP8-02XD/33 WHT AC/DC 24V	578884
Illuminated selector	White, 3-position, self-return, AC 110V-220V LED	2 NC	NP8-02XD/33 WHT AC 110V-220V	578896
Illuminated selector	White, 3-position, self-return, AC 110V-230V LED	2 NC	NP8-02XD/33 WHT AC110V-230V	667698
Illuminated selector	Red, 3-position, self-return, AC/DC 24V LED	2 NC	NP8-02XD/33 RED AC/DC 24V	578701
Illuminated selector	Red, 3-position, self-return, AC 110V-220V LED	2 NC	NP8-02XD/33 RED AC 110V-220V	578729
Illuminated selector	Red, 3-position, self-return, AC 110V-230V LED	2 NC	NP8-02XD/33 RED AC110V-230V	667665
Illuminated selector	Green, 3-position, self-return, AC/DC 24V LED	2 NC	NP8-02XD/33 GRN AC/DC 24V	578698
Illuminated selector	Green, 3-position, self-return, AC 110V-220V LED	2 NC	NP8-02XD/33 GRN AC 110V-220V	578726
Illuminated selector	Green, 3-position, self-return, AC 110V-230V LED	2 NC	NP8-02XD/33 GRN AC110V-230V	667662
Illuminated selector	Blue, 3-position, self-return, AC/DC 24V LED	2 NC	NP8-02XD/33 BLU AC/DC 24V	578890
Illuminated selector	Blue, 3-position, self-return, AC 110V-220V LED	2 NC	NP8-02XD/33 BLU AC 110V-220V	578902
Illuminated selector	Blue, 3-position, self-return, AC 110V-230V LED	2 NC	NP8-02XD/33 BLU AC110V-230V	667704
Illuminated selector	Yellow, 3-position, self-return, AC/DC 24V LED	2 NC	NP8-02XD/33 YEL AC/DC 24V	578887
Illuminated selector	Yellow, 3-position, self-return, AC 110V-220V LED	2 NC	NP8-02XD/33 YEL AC 110V-220V	578899
Illuminated selector	Yellow, 3-position, self-return, AC 110V-230V LED	2 NC	NP8-02XD/33 YEL AC110V-230V	667701
Illuminated selector	Orange, 3-position, latching on the left, self-return on the right, AC/DC 24V LED	2 NC	NP8-02XD/37 ORG AC/DC 24V	578894
Illuminated selector	Orange, 3-position, latching on the left, self-return on the right, AC 110V-220V LED	2 NC	NP8-02XD/37 OR AC 110V-220V	578906
Illuminated selector	White, 3-position, latching on the left, self-return on the right, AC/DC 24V LED	2 NC	NP8-02XD/37 WHT AC/DC 24V	578885
Illuminated selector	White, 3-position, latching on the left, self-return on the right, AC 110V-220V LED	2 NC	NP8-02XD/37 WHT AC 110V-220V	578897
Illuminated selector	White, 3-position, latching on the left, self-return on the right, AC 110V-230V LED	2 NC	NP8-02XD/37 WHT AC110V-230V	667699
Illuminated selector	Red, 3-position, latching on the left, self-return on the right, AC/DC 24V LED	2 NC	NP8-02XD/37 RED AC/DC 24V	578702
Illuminated selector	Red, 3-position, latching on the left, self-return on the right, AC 110V-220V LED	2 NC	NP8-02XD/37 RED AC 110V-220V	578730
Illuminated selector	Red, 3-position, latching on the left, self-return on the right, AC 110V-230V LED	2 NC	NP8-02XD/37 RED AC110V-230V	667666
Illuminated selector	Green, 3-position, latching on the left, self-return on the right, AC/DC 24V LED	2 NC	NP8-02XD/37 GRN AC/DC 24V	578699
Illuminated selector	Green, 3-position, latching on the left, self-return on the right, AC 110V-220V LED	2 NC	NP8-02XD/37 GRN AC 110V-220V	578727
Illuminated selector	Green, 3-position, latching on the left, self-return on the right, AC 110V-230V LED	2 NC	NP8-02XD/37 GRN AC110V-230V	667663

Туре	Color or Function	Contact	Model Description	Code
Illuminated selector	Blue, 3-position, latching on the left, self-return on the right, AC/DC 24V LED	2 NC	NP8-02XD/37 BLU AC/DC 24V	578891
Illuminated selector	Blue, 3-position, latching on the left, self-return on the right, AC 110V-220V LED	2 NC	NP8-02XD/37 BLU AC 110V-220V	578903
Illuminated selector	Blue, 3-position, latching on the left, self-return on the right, AC 110V-230V LED	2 NC	NP8-02XD/37 BLU AC110V-230V	667705
Illuminated selector	Yellow, 3-position, latching on the left, self-return on the right, AC/DC 24V LED	2 NC	NP8-02XD/37 YEL AC/DC 24V	578888
Illuminated selector	Yellow, 3-position, latching on the left, self-return on the right, AC 110V-220V LED	2 NC	NP8-02XD/37 YEL AC 110V-220V	578900
Illuminated selector	Yellow, 3-position, latching on the left, self-return on the right, AC 110V-230V LED	2 NC	NP8-02XD/37 YEL AC110V-230V	667702
Illuminated selector	Orange, 3-position, latching on the right, self-return on the left, AC/DC 24V LED	2 NC	NP8-02XD/38 ORG AC/DC 24V	578895
Illuminated selector	Orange, 3-position, latching on the right, self-return on the left, AC 110V-220V LED	2 NC	NP8-02XD/38 ORG AC 110V-220V	578907
Illuminated selector	White, 3-position, latching on the right, self-return on the left, AC/DC 24V LED	2 NC	NP8-02XD/38 WHT AC/DC 24V	578886
Illuminated selector	White, 3-position, latching on the right, self-return on the left, AC 110V-220V LED	2 NC	NP8-02XD/38 WHT AC 110V-220V	578898
Illuminated selector	White, 3-position, latching on the right, self-return on the left, AC 110V-230V LED	2 NC	NP8-02XD/38 WHT AC110V-230V	667700
Illuminated selector	Red, 3-position, latching on the right, self-return on the left, AC/DC 24V LED	2 NC	NP8-02XD/38 RED AC/DC 24V	578703
Illuminated selector	Red, 3-position, latching on the right, self-return on the left, AC 110V-220V LED	2 NC	NP8-02XD/38 RED AC 110V-220V	578731
Illuminated selector	Red, 3-position, latching on the right, self-return on the left, AC 110V-230V LED	2 NC	NP8-02XD/38 RED AC110V-230V	667667
Illuminated selector	Green, 3-position, latching on the right, self-return on the left, AC/DC 24V LED	2 NC	NP8-02XD/38 GRN AC/DC 24V	578700
Illuminated selector	Green, 3-position, latching on the right, self-return on the left, AC 110V-220V LED	2 NC	NP8-02XD/38 GRN AC 110V-220V	578728
Illuminated selector	Green, 3-position, latching on the right, self-return on the left, AC 110V-230V LED	2 NC	NP8-02XD/38 GRN AC110V-230V	667664
Illuminated selector	Blue, 3-position, latching on the right, self-return on the left, AC/DC 24V LED	2 NC	NP8-02XD/38 BLU AC/DC 24V	578892
Illuminated selector	Blue, 3-position, latching on the right, self-return on the left, AC 110V-220V LED	2 NC	NP8-02XD/38 BLU AC 110V-220V	578904
Illuminated selector	Blue, 3-position, latching on the right, self-return on the left, AC 110V-230V LED	2 NC	NP8-02XD/38 BLU AC110V-230V	667706
Illuminated selector	Yellow, 3-position, latching on the right, self-return on the left, AC/DC 24V LED	2 NC	NP8-02XD/38 YEL AC/DC 24V	578889
Illuminated selector	Yellow, 3-position, latching on the right, self-return on the left, AC 110V-220V LED	2 NC	NP8-02XD/38 YEL AC 110V-220V	578901
Illuminated selector	Yellow, 3-position, latching on the right, self-return on the left, AC 110V-230V LED	2 NC	NP8-02XD/38 YEL AC110V-230V	667703
Key selector	2-position, latching	2 NC	NP8-02Y/21	667181
Key selector	2-position, self-return	2 NC	NP8-02Y/22	578671
Key selector	3-position, latching	2 NC	NP8-02Y/31	667184
Key selector	3-position, self-return	2 NC	NP8-02Y/33	578676
Key selector	3-position, latching on the left, self-return on the right	2 NC	NP8-02Y/37	578677
Key selector	3-position, latching on the right, self-return on the left	2 NC	NP8-02Y/38	578678
Mushroom button	Red, Φ40mm, latching, turn release	2 NC	NP8-02ZS/1 RED	667214
Mushroom button	Red, Φ60mm, latching, turn release	2 NC	NP8-02ZS/2 RED	667215
Mushroom button Flush button	Red, Φ30mm, latching, turn release White	2 NC 3 NC	NP8-02ZS/3 RED NP8-03BN WHT	667853 368576
Flush button				
Flush button	Red Green	3 NC 3 NC	NP8-03BN RED NP8-03BN GRN	368579 368578
Flush button	Blue	3 NC	NP8-03BN BLU	578635
Flush button	Yellow	3 NC	NP8-03BN YEL	368580
Flush button	Black	3 NC	NP8-03BN BLK	368577
Projecting button	Blue	3 NC	NP8-03GN BLU	578636
Mushroom button	Green, Ø40mm	3 NC	NP8-03M/1 GRN	578637
Mushroom button	Red, Φ60mm	3 NC	NP8-03M/2 RED	578638
Flush button	White	1 NO	NP8-10BN WHT	578646
Flush button	Red	1 NO	NP8-10BN RED	667233
Flush button	Green	1 NO	NP8-10BN GRN	667232

(P- 415) B.2 Pushbuttons & Indicator Lights & Buzzers | Pushbuttons

Туре	Color or Function	Contact	Model Description	Code
Illuminated selector	Red, 2-position, self-return, AC 110V-230V LED	2 NC	NP8-02XD/22 RED AC110V-230V	667653
Illuminated selector	Green, 2-position, self-return, AC/DC 24V LED	2 NC	NP8-02XD/22 GRN AC/DC 24V	578688
Illuminated selector	Green, 2-position, self-return, AC 110V-220V LED	2 NC	NP8-02XD/22 GRN AC 110V-220V	578716
Illuminated selector	Green, 2-position, self-return, AC 110V-230V LED	2 NC	NP8-02XD/22 GRN AC110V-230V	667652
Illuminated selector	Blue, 2-position, self-return, AC/DC 24V LED	2 NC	NP8-02XD/22 BLU AC/DC 24V	578816
Illuminated selector	Blue, 2-position, self-return, AC 110V-220V LED	2 NC	NP8-02XD/22 BLU AC 110V-220V	578820
Illuminated selector	Blue, 2-position, self-return, AC 110V-230V LED	2 NC	NP8-02XD/22 BLU AC110V-230V	667685
Illuminated selector	Yellow, 2-position, self-return, AC/DC 24V LED	2 NC	NP8-02XD/22 YEL AC/DC 24V	578815
Illuminated selector	Yellow, 2-position, self-return, AC 110V-220V LED	2 NC	NP8-02XD/22 YEL AC 110V-220V	578819
Illuminated selector	Yellow, 2-position, self-return, AC 110V-230V LED	2 NC	NP8-02XD/22 YEL AC110V-230V	667684
Illuminated selector	Red, 3-position, latching, AC 110V-220V LED	2 NC	NP8-02XD/31 RED AC 110V-220V	667207
Illuminated selector	Red, 3-position, latching, AC 110V-230V LED	2 NC	NP8-02XD/31 RED AC 110V-230V	667576
Illuminated selector	Red, 3-position, latching, AC/DC 24V LED	2 NC	NP8-02XD/31 RED AC/DC 24V	667195
Illuminated selector	Green, 3-position, latching, AC 110V-220V LED	2 NC	NP8-02XD/31 GRN AC 110V-220V	667206
Illuminated selector	Green, 3-position, latching, AC 110V-230V LED	2 NC	NP8-02XD/31 GRN AC 110V-230V	667575
Illuminated selector	Green, 3-position, latching, AC/DC 24V LED	2 NC	NP8-02XD/31 GRN AC/DC 24V	667194
Illuminated selector	Orange, 3-position, self-return, AC/DC 24V LED	2 NC	NP8-02XD/33 ORG AC/DC 24V	578893
Illuminated selector	Orange, 3-position, self-return, AC 110V-220V LED	2 NC	NP8-02XD/33 ORG AC 110V-220V	578905
Illuminated selector	White, 3-position, self-return, AC/DC 24V LED	2 NC	NP8-02XD/33 WHT AC/DC 24V	578884
Illuminated selector	White, 3-position, self-return, AC 110V-220V LED	2 NC	NP8-02XD/33 WHT AC 110V-220V	578896
Illuminated selector	White, 3-position, self-return, AC 110V-230V LED	2 NC	NP8-02XD/33 WHT AC110V-230V	667698
Illuminated selector	Red, 3-position, self-return, AC/DC 24V LED	2 NC	NP8-02XD/33 RED AC/DC 24V	578701
Illuminated selector	Red, 3-position, self-return, AC 110V-220V LED	2 NC	NP8-02XD/33 RED AC 110V-220V	578729
Illuminated selector	Red, 3-position, self-return, AC 110V-230V LED	2 NC	NP8-02XD/33 RED AC110V-230V	667665
Illuminated selector	Green, 3-position, self-return, AC/DC 24V LED	2 NC	NP8-02XD/33 GRN AC/DC 24V	578698
Illuminated selector	Green, 3-position, self-return, AC 110V-220V LED	2 NC	NP8-02XD/33 GRN AC 110V-220V	578726
Illuminated selector	Green, 3-position, self-return, AC 110V-230V LED	2 NC	NP8-02XD/33 GRN AC110V-230V	667662
Illuminated selector	Blue, 3-position, self-return, AC/DC 24V LED	2 NC	NP8-02XD/33 BLU AC/DC 24V	578890
Illuminated selector	Blue, 3-position, self-return, AC 110V-220V LED	2 NC	NP8-02XD/33 BLU AC 110V-220V	578902
Illuminated selector	Blue, 3-position, self-return, AC 110V-230V LED	2 NC	NP8-02XD/33 BLU AC110V-230V	667704
Illuminated selector	Yellow, 3-position, self-return, AC/DC 24V LED	2 NC	NP8-02XD/33 YEL AC/DC 24V	578887
Illuminated selector	Yellow, 3-position, self-return, AC 110V-220V LED	2 NC	NP8-02XD/33 YEL AC 110V-220V	578899
Illuminated selector	Yellow, 3-position, self-return, AC 110V-230V LED	2 NC	NP8-02XD/33 YEL AC110V-230V	667701
Illuminated selector	Orange, 3-position, latching on the left, self-return on the right, AC/DC 24V LED	2 NC	NP8-02XD/37 ORG AC/DC 24V	578894
Illuminated selector	Orange, 3-position, latching on the left, self-return on the right, AC 110V-220V LED	2 NC	NP8-02XD/37 OR AC 110V-220V	578906
Illuminated selector	White, 3-position, latching on the left, self-return on the right, AC/DC 24V LED	2 NC	NP8-02XD/37 WHT AC/DC 24V	578885
Illuminated selector	White, 3-position, latching on the left, self-return on the right, AC 110V-220V LED	2 NC	NP8-02XD/37 WHT AC 110V-220V	578897
Illuminated selector	White, 3-position, latching on the left, self-return on the right, AC 110V-230V LED	2 NC	NP8-02XD/37 WHT AC110V-230V	667699
Illuminated selector	Red, 3-position, latching on the left, self-return on the right, AC/DC 24V LED	2 NC	NP8-02XD/37 RED AC/DC 24V	578702
Illuminated selector	Red, 3-position, latching on the left, self-return on the right, AC 110V-220V LED	2 NC	NP8-02XD/37 RED AC 110V-220V	578730
Illuminated selector	Red, 3-position, latching on the left, self-return on the right, AC 110V-230V LED	2 NC	NP8-02XD/37 RED AC110V-230V	667666
Illuminated selector	Green, 3-position, latching on the left, self-return on the right, AC/DC 24V LED	2 NC	NP8-02XD/37 GRN AC/DC 24V	578699
Illuminated selector	Green, 3-position, latching on the left, self-return on the right, AC 110V-220V LED	2 NC	NP8-02XD/37 GRN AC 110V-220V	578727
Illuminated selector	Green, 3-position, latching on the left, self-return on the right, AC 110V-230V LED	2 NC	NP8-02XD/37 GRN AC110V-230V	667663

Туре	Color or Function	Contact	Model Description	Code
Illuminated selector	Blue, 3-position, latching on the left, self-return on the right, AC/DC 24V LED	2 NC	NP8-02XD/37 BLU AC/DC 24V	578891
Illuminated selector	Blue, 3-position, latching on the left, self-return on the right, AC 110V-220V LED	2 NC	NP8-02XD/37 BLU AC 110V-220V	578903
Illuminated selector	Blue, 3-position, latching on the left, self-return on the right, AC 110V-230V LED	2 NC	NP8-02XD/37 BLU AC110V-230V	667705
Illuminated selector	Yellow, 3-position, latching on the left, self-return on the right, AC/DC 24V LED	2 NC	NP8-02XD/37 YEL AC/DC 24V	578888
Illuminated selector	Yellow, 3-position, latching on the left, self-return on the right, AC 110V-220V LED	2 NC	NP8-02XD/37 YEL AC 110V-220V	578900
Illuminated selector	Yellow, 3-position, latching on the left, self-return on the right, AC 110V-230V LED	2 NC	NP8-02XD/37 YEL AC110V-230V	667702
Illuminated selector	Orange, 3-position, latching on the right, self-return on the left, AC/DC 24V LED	2 NC	NP8-02XD/38 ORG AC/DC 24V	578895
Illuminated selector	Orange, 3-position, latching on the right, self-return on the left, AC 110V-220V LED	2 NC	NP8-02XD/38 ORG AC 110V-220V	578907
Illuminated selector	White, 3-position, latching on the right, self-return on the left, AC/DC 24V LED	2 NC	NP8-02XD/38 WHT AC/DC 24V	578886
Illuminated selector	White, 3-position, latching on the right, self-return on the left, AC 110V-220V LED	2 NC	NP8-02XD/38 WHT AC 110V-220V	578898
Illuminated selector	White, 3-position, latching on the right, self-return on the left, AC 110V-230V LED	2 NC	NP8-02XD/38 WHT AC110V-230V	667700
Illuminated selector	Red, 3-position, latching on the right, self-return on the left, AC/DC 24V LED	2 NC	NP8-02XD/38 RED AC/DC 24V	578703
Illuminated selector	Red, 3-position, latching on the right, self-return on the left, AC 110V-220V LED	2 NC	NP8-02XD/38 RED AC 110V-220V	578731
Illuminated selector	Red, 3-position, latching on the right, self-return on the left, AC 110V-230V LED	2 NC	NP8-02XD/38 RED AC110V-230V	667667
Illuminated selector	Green, 3-position, latching on the right, self-return on the left, AC/DC 24V LED	2 NC	NP8-02XD/38 GRN AC/DC 24V	578700
Illuminated selector	Green, 3-position, latching on the right, self-return on the left, AC 110V-220V LED	2 NC	NP8-02XD/38 GRN AC 110V-220V	578728
Illuminated selector	Green, 3-position, latching on the right, self-return on the left, AC 110V-230V LED	2 NC	NP8-02XD/38 GRN AC110V-230V	667664
Illuminated selector	Blue, 3-position, latching on the right, self-return on the left, AC/DC 24V LED	2 NC	NP8-02XD/38 BLU AC/DC 24V	578892
Illuminated selector	Blue, 3-position, latching on the right, self-return on the left, AC 110V-220V LED	2 NC	NP8-02XD/38 BLU AC 110V-220V	578904
Illuminated selector	Blue, 3-position, latching on the right, self-return on the left, AC 110V-230V LED	2 NC	NP8-02XD/38 BLU AC110V-230V	667706
Illuminated selector	Yellow, 3-position, latching on the right, self-return on the left, AC/DC 24V LED	2 NC	NP8-02XD/38 YEL AC/DC 24V	578889
Illuminated selector	Yellow, 3-position, latching on the right, self-return on the left, AC 110V-220V LED	2 NC	NP8-02XD/38 YEL AC 110V-220V	578901
Illuminated selector	Yellow, 3-position, latching on the right, self-return on the left, AC 110V-230V LED	2 NC	NP8-02XD/38 YEL AC110V-230V	667703
Key selector	2-position, latching	2 NC	NP8-02Y/21	667181
Key selector	2-position, self-return	2 NC	NP8-02Y/22	578671
Key selector	3-position, latching	2 NC	NP8-02Y/31	667184
Key selector	3-position, self-return	2 NC	NP8-02Y/33	578676
Key selector	3-position, latching on the left, self-return on the right	2 NC	NP8-02Y/37	578677
Key selector	3-position, latching on the right, self-return on the left	2 NC	NP8-02Y/38	578678
Mushroom button	Red, Φ40mm, latching, turn release	2 NC	NP8-02ZS/1 RED	667214
Mushroom button Mushroom button	Red, Φ60mm, latching, turn release	2 NC	NP8-02ZS/2 RED	667215 667853
Flush button	Red, Φ30mm, latching, turn release White	2 NC 3 NC	NP8-02ZS/3 RED NP8-03BN WHT	368576
Flush button	Red	3 NC	NP8-03BN RED	368579
Flush button	Green	3 NC	NP8-03BN GRN	368578
Flush button	Blue	3 NC	NP8-03BN BLU	578635
Flush button	Yellow	3 NC	NP8-03BN YEL	368580
Flush button	Black	3 NC	NP8-03BN BLK	368577
Projecting button	Blue	3 NC	NP8-03GN BLU	578636
Mushroom button	Green, Φ40mm	3 NC	NP8-03M/1 GRN	578637
Mushroom button	Red, Φ60mm	3 NC	NP8-03M/2 RED	578638
Flush button	White	1 NO	NP8-10BN WHT	578646
Flush button	Red	1 NO	NP8-10BN RED	667233
Flush button	Green	1 NO	NP8-10BN GRN	667232

Туре	Color or Function	Contact	Model Description	Code
Flush button	Blue	1 NO	NP8-10BN BLU	578645
Flush button	Yellow	1 NO	NP8-10BN YEL	667333
Flush button	Black	1 NO	NP8-10BN BLK	578647
Illuminated flush button	Orange, AC 110V-220V LED	1 NO	NP8-10BND ORG AC 110V-220V	667337
Illuminated flush button	White, AC 110V-220V LED	1 NO	NP8-10BND WHT AC 110V-220V	578662
Illuminated flush button	White, AC 110V-230V LED	1 NO	NP8-10BND WHT AC 110V-230V	667643
Illuminated flush button	White, AC/DC 24V LED	1 NO	NP8-10BND WHT AC/DC 24V	667862
Illuminated flush button	Red, AC 110V-220V LED	1 NO	NP8-10BND RED AC 110V-220V	667252
Illuminated flush button	Red, AC 110V-230V LED	1 NO	NP8-10BND RED AC 110V-230V	667585
Illuminated flush button	Red, AC/DC 24V LED	1 NO	NP8-10BND RED AC/DC 24V	667241
Illuminated flush button	Green, AC 110V-220V LED	1 NO	NP8-10BND GRN AC 110V-220V	667251
Illuminated flush button	Green, AC 110V-230V LED	1 NO	NP8-10BND GRN AC 110V-230V	667584
Illuminated flush button	Green, AC/DC 12V LED	1 NO	NP8-10BND GRN AC/DC 12V	667382
Illuminated flush button	Green, AC/DC 24V LED	1 NO	NP8-10BND GRN AC/DC 24V	667240
Illuminated flush button	Green, AC/DC 36V LED	1 NO	NP8-10BND GRN AC/DC 36V	667385
Illuminated flush button	Blue, AC 110V-220V LED	1 NO	NP8-10BND BLU AC 110V-220V	578663
Illuminated flush button	Blue, AC 110V-230V LED	1 NO	NP8-10BND BLU AC 110V-230V	667644
Illuminated flush button	Blue, AC/DC 12V LED	1 NO	NP8-10BND BLU AC/DC 12V	667384
Illuminated flush button	Blue, AC/DC 24V LED	1 NO	NP8-10BND BLU AC/DC 24V	578945
Illuminated flush button	Yellow, AC 110V-220V LED	1 NO	NP8-10BND YEL AC 110V-220V	667321
Illuminated flush button	Yellow, AC 110V-230V LED	1 NO	NP8-10BND YEL AC 110V-230V	667613
Illuminated flush button	Yellow, AC/DC 12V LED	1 NO	NP8-10BND YEL AC/DC 12V	667383
Illuminated flush button	Yellow, AC/DC 24V LED	1 NO	NP8-10BND YEL AC/DC 24V	667320
Projecting button	Red	1 NO	NP8-10GN RED	667293
Projecting button	Green	1 NO	NP8-10GN GRN	667292
Projecting button	Blue	1 NO	NP8-10GN BLU	667380
Projecting button	Yellow	1 NO	NP8-10GN YEL	667379
Illuminated projecting button	Red, AC 110V-220V LED	1 NO	NP8-10GND RED AC 110V-220V	667311
Illuminated projecting button	Red, AC 110V-230V LED	1 NO	NP8-10GND RED AC 110V-230V	667606
Illuminated projecting button	Red, AC/DC 24V LED	1 NO	NP8-10GND RED AC/DC 24V	667301
Illuminated projecting button	Green, AC 110V-220V LED	1 NO	NP8-10GND GRN AC 110V-220V	667310
Illuminated projecting button	Green, AC 110V-230V LED	1 NO	NP8-10GND GRN AC 110V-230V	667605
Illuminated projecting button	Green, AC/DC 24V LED	1 NO	NP8-10GND GRN AC/DC 24V	667300
Illuminated projecting button	Yellow, AC 110V-220V LED	1 NO	NP8-10GND YEL AC 110V-220V	667332
Illuminated projecting button	Yellow, AC 110V-230V LED	1 NO	NP8-10GND YEL AC 110V-230V	667619
Mushroom button	Red, Φ40mm	1 NO	NP8-10M/1 RED	667263
Mushroom button	Green, Φ40mm	1 NO	NP8-10M/1 GRN	667262
Mushroom button	Black, Ф40mm	1 NO	NP8-10M/1 BLK	578935
Mushroom button	Red, Φ60mm	1 NO	NP8-10M/2 RED	578656
Mushroom button	Green, Φ60mm	1 NO	NP8-10M/2 GRN	578657
Illuminated mushroom button	White, Φ40mm, AC 110V-220V LED	1 NO	NP8-10MD/1 WHT AC 110V-220V	578664
Illuminated mushroom button	White, Φ40mm, AC 110V-230V LED	1 NO	NP8-10MD/1 WHT AC 110V-230V	667645
Illuminated mushroom button	Red, Φ40mm, AC 110V-220V LED	1 NO	NP8-10MD/1 RED AC 110V-220V	667283
Illuminated mushroom button	Red, Φ40mm, AC 110V-230V LED	1 NO	NP8-10MD/1 RED AC 110V-230V	667596

Туре	Color or Function	Contact	Model Description	Code
Illuminated mushroom button	Red, 🛙 40mm, AC/DC 24V LED	1 NO	NP8-10MD/1 RED AC/DC 24V	667273
Illuminated mushroom button	Green, 040mm, AC 110V-220V LED	1 NO	NP8-10MD/1 GRN AC 110V-220V	667282
Illuminated mushroom button	Green, 🛙 40mm, AC 110V-230V LED	1 NO	NP8-10MD/1 GRN AC 110V-230V	667595
Illuminated mushroom button	Green, 🛙 40mm, AC/DC 24V LED	1 NO	NP8-10MD/1 GRN AC/DC 24V	667272
Selector	White, 2-position, latching	1 NO	NP8-10X/21 WHT	578660
Selector	Red, 2-position, latching	1 NO	NP8-10X/21 RED	667221
Selector	Green, 2-position, latching	1 NO	NP8-10X/21 GRN	667220
Selector	Blue, 2-position, latching	1 NO	NP8-10X/21 BLU	578659
Selector	Yellow, 2-position, latching	1 NO	NP8-10X/21 YEL	578658
Selector	Black, 2-position, latching	1 NO	NP8-10X/21 BLK	578661
Selector	White, 2-position, self-return	1 NO	NP8-10X/22 WHT	578775
Selector	Red, 2-position, self-return	1 NO	NP8-10X/22 RED	578741
Selector	Green, 2-position, self-return	1 NO	NP8-10X/22 GRN	578740
Selector	Blue, 2-position, self-return	1 NO	NP8-10X/22 BLU	578778
Selector	Yellow, 2-position, self-return	1 NO	NP8-10X/22 YEL	578777
Selector	Black, 2-position, self-return	1 NO	NP8-10X/22 BLK	578776
Illuminated selector	White, 2-position, latching, AC 110V-220V LED	1 NO	NP8-10XD/21 WHT AC 110V-220V	667330
Illuminated selector	White, 2-position, latching, AC 110V-230V LED	1 NO	NP8-10XD/21 WHT AC 110V-230V	667617
Illuminated selector	White, 2-position, latching, AC/DC 24V LED	1 NO	NP8-10XD/21 WHT AC/DC 24V	578667
Illuminated selector	Red, 2-position, latching, AC 110V-220V LED	1 NO	NP8-10XD/21 RED AC 110V-220V	667201
Illuminated selector	Red, 2-position, latching, AC 110V-230V LED	1 NO	NP8-10XD/21 RED AC 110V-230V	667570
Illuminated selector	Red, 2-position, latching, AC/DC 12V LED	1 NO	NP8-10XD/21 RED AC/DC 12V	667876
Illuminated selector	Red, 2-position, latching, AC/DC 24V LED	1 NO	NP8-10XD/21 RED AC/DC 24V	667189
Illuminated selector	Green, 2-position, latching, AC 110V-220V LED	1 NO	NP8-10XD/21 GRN AC 110V-220V	667200
Illuminated selector	Green, 2-position, latching, AC 110V-230V LED	1 NO	NP8-10XD/21 GRN AC 110V-230V	667569
Illuminated selector	Green, 2-position, latching, AC/DC 12V LED	1 NO	NP8-10XD/21 GRN AC/DC 12V	256842
Illuminated selector	Green, 2-position, latching, AC/DC 24V LED	1 NO	NP8-10XD/21 GRN AC/DC 24V	667188
Illuminated selector	Blue, 2-position, latching, AC 110V-220V LED	1 NO	NP8-10XD/21 BLU AC 110V-220V	578640
Illuminated selector	Blue, 2-position, latching, AC 110V-230V LED	1 NO	NP8-10XD/21 BLU AC 110V-230V	667638
Illuminated selector	Blue, 2-position, latching, AC/DC 24V LED	1 NO	NP8-10XD/21 BLU AC/DC 24V	578666
Illuminated selector	Yellow, 2-position, latching, AC 110V-220V LED	1 NO	NP8-10XD/21 YEL AC 110V-220V	578639
Illuminated selector	Yellow, 2-position, latching, AC 110V-230V LED	1 NO	NP8-10XD/21 YEL AC 110V-230V	667637
Illuminated selector	Yellow, 2-position, latching, AC/DC 24V LED	1 NO	NP8-10XD/21 YEL AC/DC 24V	578665
Illuminated selector	Orange, 2-position, self-return, AC/DC 24V LED	1 NO	NP8-10XD/22 ORG AC/DC 24V	578801
Illuminated selector	Orange, 2-position, self-return, AC 110V-220V LED	1 NO	NP8-10XD/22 ORG AC 110V-220V	578805
Illuminated selector	White, 2-position, self-return, AC/DC 24V LED	1 NO	NP8-10XD/22 WHT AC/DC 24V	578798
Illuminated selector	White, 2-position, self-return, AC 110V-220V LED	1 NO	NP8-10XD/22 WHT AC 110V-220V	578802
Illuminated selector	White, 2-position, self-return, AC 110V-230V LED	1 NO	NP8-10XD/22 WHT AC110V-230V	667677
Illuminated selector	Red, 2-position, self-return, AC/DC 24V LED	1 NO	NP8-10XD/22 RED AC/DC 24V	578685
Illuminated selector	Red, 2-position, self-return, AC 110V-220V LED	1 NO	NP8-10XD/22 RED AC 110V-220V	578713
Illuminated selector	Red, 2-position, self-return, AC 110V-230V LED	1 NO	NP8-10XD/22 RED AC110V-230V	667649
Illuminated selector	Green, 2-position, self-return, AC/DC 24V LED	1 NO	NP8-10XD/22 GRN AC/DC 24V	578684
Illuminated selector	Green, 2-position, self-return, AC 110V-220V LED	1 NO	NP8-10XD/22 GRN AC 110V-220V	578712
Illuminated selector	Green, 2-position, self-return, AC 110V-230V LED	1 NO	NP8-10XD/22 GRN AC110V-230V	667648

(P- 419) B.2 Pushbuttons & Indicator Lights & Buzzers | Pushbuttons

Туре	Color or Function	Contact	Model Description	Code
Illuminated selector	Blue, 2-position, self-return, AC/DC 24V LED	1 NO	NP8-10XD/22 BLU AC/DC 24V	578800
Illuminated selector	Blue, 2-position, self-return, AC 110V-220V LED	1 NO	NP8-10XD/22 BLU AC 110V-220V	578804
Illuminated selector	Blue, 2-position, self-return, AC 110V-230V LED	1 NO	NP8-10XD/22 BLU AC110V-230V	667679
Illuminated selector	Yellow, 2-position, self-return, AC/DC 24V LED	1 NO	NP8-10XD/22 YEL AC/DC 24V	578799
Illuminated selector	Yellow, 2-position, self-return, AC 110V-220V LED	1 NO	NP8-10XD/22 YEL AC 110V-220V	578803
Illuminated selector	Yellow, 2-position, self-return, AC 110V-230V LED	1 NO	NP8-10XD/22 YEL AC110V-230V	667678
Key selector	2-position, latching	1 NO	NP8-10Y/21	578130
Key selector	2-position, self-return	1 NO	NP8-10Y/22	578669
Mushroom button	Red, Φ40mm, latching, turn release	1 NO	NP8-10ZS/1 RED	667212
Mushroom button	Red, Φ60mm, latching, turn release	1 NO	NP8-10ZS/2 RED	667213
Mushroom button	Red, Φ30mm, latching, turn release	1 NO	NP8-10ZS/3 RED	667850
Flush button	White	1 NO+1NC	NP8-11BN WHT	667111
Flush button	Red	1 NO+1NC	NP8-11BN RED	667114
Flush button	Green	1 NO+1NC	NP8-11BN GRN	667113
Flush button	Blue	1 NO+1NC	NP8-11BN BLU	667116
Flush button	Yellow	1 NO+1NC	NP8-11BN YEL	667115
Flush button	Black	1 NO+1NC	NP8-11BN BLK	667112
Illuminated flush button	Orange, AC 110V-220V LED	1 NO+1NC	NP8-11BND ORG AC 110V-220V	667128
Illuminated flush button	Orange, AC/DC 24V LED	1 NO+1NC	NP8-11BND ORG AC/DC 24V	667122
Illuminated flush button	White, AC 110V-220V LED	1 NO+1NC	NP8-11BND WHT AC 110V-220V	667127
Illuminated flush button	White, AC 110V-230V LED	1 NO+1NC	NP8-11BND WHT AC 110V-230V	667551
Illuminated flush button	White, AC/DC 24V LED	1 NO+1NC	NP8-11BND WHT AC/DC 24V	667117
Illuminated flush button	White, AC/DC 36V LED	1 NO+1NC	NP8-11BND WHT AC/DC 36V	578947
Illuminated flush button	Red, AC 110V-220V LED	1 NO+1NC	NP8-11BND RED AC 110V-220V	667124
Illuminated flush button	Red, AC 110V-230V LED	1 NO+1NC	NP8-11BND RED AC 110V-230V	667548
Illuminated flush button	Red, AC/DC 24V LED	1 NO+1NC	NP8-11BND RED AC/DC 24V	667119
Illuminated flush button	Red, AC/DC 36V LED	1 NO+1NC	NP8-11BND RED AC/DC 36V	578950
Illuminated flush button	Green, AC 110V-220V LED	1 NO+1NC	NP8-11BND GRN AC 110V-220V	667123
Illuminated flush button	Green, AC 110V-230V LED	1 NO+1NC	NP8-11BND GRN AC 110V-230V	667547
Illuminated flush button	Green, AC/DC 24V LED	1 NO+1NC	NP8-11BND GRN AC/DC 24V	667118
Illuminated flush button	Green, AC/DC 36V LED	1 NO+1NC	NP8-11BND GRN AC/DC 36V	578948
Illuminated flush button	Blue, AC 110V-220V LED	1 NO+1NC	NP8-11BND BLU AC 110V-220V	667126
Illuminated flush button	Blue, AC 110V-230V LED	1 NO+1NC	NP8-11BND BLU AC 110V-230V	667550
Illuminated flush button	Blue, AC/DC 24V LED	1 NO+1NC	NP8-11BND BLU AC/DC 24V	667121
Illuminated flush button	Blue, AC/DC 36V LED	1 NO+1NC	NP8-11BND BLU AC/DC 36V	578951
Illuminated flush button	Yellow, AC 110V-220V LED	1 NO+1NC	NP8-11BND YEL AC 110V-220V	667125
Illuminated flush button	Yellow, AC 110V-230V LED	1 NO+1NC	NP8-11BND YEL AC 110V-230V	667549
Illuminated flush button	Yellow, AC/DC 24V LED	1 NO+1NC	NP8-11BND YEL AC/DC 24V	667120
Illuminated flush button	Yellow, AC/DC 36V LED	1 NO+1NC	NP8-11BND YEL AC/DC 36V	578949
Projecting button	Red	1 NO+1NC	NP8-11GN RED	667110
Projecting button	Green	1 NO+1NC	NP8-11GN GRN	667109
Illuminated projecting button	White, AC 110V-220V LED	1 NO+1NC	NP8-11GND WHT AC 110V-220V	667331
Illuminated projecting button	White, AC 110V-230V LED	1 NO+1NC	NP8-11GND WHT AC 110V-230V	667618
Illuminated projecting button	Red, AC 110V-220V LED	1 NO+1NC	NP8-11GND RED AC 110V-220V	667313

Туре	Color or Function	Contact	Model Description	Code
Illuminated projecting button	Red, AC 110V-230V LED	1 NO+1NC	NP8-11GND RED AC 110V-230V	667608
Illuminated projecting button	Red, AC/DC 24V LED	1 NO+1NC	NP8-11GND RED AC/DC 24V	667303
Illuminated projecting button	Green, AC 110V-220V LED	1 NO+1NC	NP8-11GND GRN AC 110V-220V	667312
Illuminated projecting button	Green, AC 110V-230V LED	1 NO+1NC	NP8-11GND GRN AC 110V-230V	667607
Illuminated projecting button	Green, AC/DC 24V LED	1 NO+1NC	NP8-11GND GRN AC/DC 24V	667302
Mushroom button	Red, Φ40mm	1 NO+1NC	NP8-11M/1 RED	667265
Mushroom button	Green, Φ40mm	1 NO+1NC	NP8-11M/1 GRN	667264
Mushroom button	Yellow, Φ40mm	1 NO+1NC	NP8-11M/1 YEL	578938
Mushroom button	Black, Φ40mm	1 NO+1NC	NP8-11M/1 BLK	578946
Mushroom button	White, Φ60mm	1 NO+1NC	NP8-11M/2 WHT	578940
Mushroom button	Red, Φ60mm	1 NO+1NC	NP8-11M/2 RED	578942
Mushroom button	Green, Φ60mm	1 NO+1NC	NP8-11M/2 GRN	578941
Mushroom button	Blue, Φ60mm	1 NO+1NC	NP8-11M/2 BLU	578944
Mushroom button	Yellow, Φ60mm	1 NO+1NC	NP8-11M/2 YEL	578943
Illuminated mushroom button	Red, Φ40mm, AC 110V-220V LED	1 NO+1NC	NP8-11MD/1 RED AC 110V-220V	667285
Illuminated mushroom button	Red, Φ40mm, AC 110V-230V LED	1 NO+1NC	NP8-11MD/1 RED AC 110V-230V	667598
Illuminated mushroom button	Red, Φ40mm, AC/DC 24V LED	1 NO+1NC	NP8-11MD/1 RED AC/DC 24V	667275
Illuminated mushroom button	Green, Φ40mm, AC 110V-220V LED	1 NO+1NC	NP8-11MD/1 GRN AC 110V-220V	667284
Illuminated mushroom button	Green, Φ40mm, AC 110V-230V LED	1 NO+1NC	NP8-11MD/1 GRN AC 110V-230V	667597
Illuminated mushroom button	Green, Φ40mm, AC/DC 24V LED	1 NO+1NC	NP8-11MD/1 GRN AC/DC 24V	667274
Illuminated mushroom button	Green, Φ40mm, AC/DC 36V LED	1 NO+1NC	NP8-11MD/1 GRN AC/DC 36V	667378
Illuminated mushroom button	Yellow, Φ40mm, AC/DC 24V LED	1 NO+1NC	NP8-11MD/1 yellow AC/DC 24V	522614
Illuminated mushroom button	Red, Φ60mm, AC 110V-220V LED	1 NO+1NC	NP8-11MD/2 RED AC 110V-220V	667362
Illuminated mushroom button	Red, Φ60mm, AC 110V-230V LED	1 NO+1NC	NP8-11MD/2 RED AC 110V-230V	667631
Illuminated mushroom button	Green, Ф60mm, AC 110V-220V LED	1 NO+1NC	NP8-11MD/2 GRN AC 110V-220V	667363
Illuminated mushroom button	Green, Φ60mm, AC 110V-230V LED	1 NO+1NC	NP8-11MD/2 GRN AC 110V-230V	667632
Double headed button	1 black and 1 white flush button	1 NO+1NC	NP8-11S BK/WH	210408
Double headed button	1 green and 1 red flush button	1 NO+1NC	NP8-115	667178
Illuminated double headed button	1 green and 1 red flush button, 1 orange pilot light, AC 110V-220V LED	1 NO+1NC	NP8-11SD ORG AC 110V-220V	667177
Illuminated double headed button	1 green and 1 red flush button, 1 orange pilot light, AC 110-230V LED	1 NO+1NC	NP8-11SD ORG AC 110V-230V	293451
Illuminated double headed button	1 green and 1 red flush button, 1 orange pilot light, AC/DC 24V LED	1 NO+1NC	NP8-11SD ORG AC/DC 24V	667171
Illuminated double headed button	1 green and 1 red flush button, 1 white pilot light, AC 110V-220V LED	1 NO+1NC	NP8-11SD WHT AC 110V-220V	667172
Illuminated double headed button	1 green and 1 red flush button, 1 white pilot light, AC 110V-230V LED	1 NO+1NC	NP8-11SD WHT AC 110V-230V	667562
Illuminated double headed button	1 green and 1 red flush button, 1 white pilot light, AC/ DC 24V LED	1 NO+1NC	NP8-11SD WHT AC/DC 24V	667166
Illuminated double headed button	1 green and 1 red flush button, 1 red pilot light, AC 110V-220V LED	1 NO+1NC	NP8-11SD RED AC 110V-220V	667174
Illuminated double headed button	1 green and 1 red flush button, 1 red pilot light, AC 110V-230V LED	1 NO+1NC	NP8-11SD RED AC 110V-230V	667564
Illuminated double headed button	1 green and 1 red flush button, 1 red pilot light, AC/DC 24V LED	1 NO+1NC	NP8-11SD RED AC/DC 24V	667168
Illuminated double headed button	1 green and 1 red flush button, 1 green pilot light, AC 110V-220V LED	1 NO+1NC	NP8-11SD GRN AC 110V-220V	667173
Illuminated double headed button	1 green and 1 red flush button, 1 green pilot light, AC 110V-230V LED	1 NO+1NC	NP8-11SD GRN AC 110V-230V	667563
Illuminated double headed button	1 green and 1 red flush button, 1 green pilot light, AC/ DC 24V LED	1 NO+1NC	NP8-11SD GRN AC/DC 24V	667167
	1 green and 1 red flush button, 1 blue pilot light, AC	1 NO+1NC	NP8-11SD BLU AC 110V-220V	667176
Illuminated double headed button	110V-220V LED			
Illuminated double headed button		1 NO+1NC	NP8-11SD BLU AC 110V-230V	667566
	110V-220V LED 1 green and 1 red flush button, 1 blue pilot light, AC	1 NO+1NC 1 NO+1NC	NP8-11SD BLU AC 110V-230V NP8-11SD BLU AC/DC 24V	667566 667170

(P- 421) B.2 Pushbuttons & Indicator Lights & Buzzers | Pushbuttons

Туре	Color or Function	Contact	Model Description	Code
Illuminated double headed button	1 green and 1 red flush button, 1 yellow pilot light, AC 110V-230V LED	1 NO+1NC	NP8-11SD YEL AC 110V-230V	667565
Illuminated double headed button	1 green and 1 red flush button, 1 yellow pilot light, AC/DC 24V LED	1 NO+1NC	NP8-11SD YEL AC/DC 24V	667169
Selector	White, 2-position, latching	1 NO+1NC	NP8-11X/21 WHT	667131
Selector	Red, 2-position, latching	1 NO+1NC	NP8-11X/21 RED	667133
Selector	Green, 2-position, latching	1 NO+1NC	NP8-11X/21 GRN	667132
Selector	Blue, 2-position, latching	1 NO+1NC	NP8-11X/21 BLU	667135
Selector	Yellow, 2-position, latching	1 NO+1NC	NP8-11X/21 YEL	667134
Selector	Black, 2-position, latching	1 NO+1NC	NP8-11X/21 BLK	578129
Selector	White, 2-position, self-return	1 NO+1NC	NP8-11X/22 WHT	578779
Selector	Red, 2-position, self-return	1 NO+1NC	NP8-11X/22 RED	578743
Selector	Green, 2-position, self-return	1 NO+1NC	NP8-11X/22 GRN	578742
Selector	Blue, 2-position, self-return	1 NO+1NC	NP8-11X/22 BLU	578781
Selector	Yellow, 2-position, self-return	1 NO+1NC	NP8-11X/22 YEL	578780
Selector	Black, 2-position, self-return	1 NO+1NC	NP8-11X/22 BLK	578766
Selector	White, 3-position, latching	1 NO+1NC	NP8-11X/31 WHT	667136
Selector	Red, 3-position, latching	1 NO+1NC	NP8-11X/31 RED	667139
Selector	Green, 3-position, latching	1 NO+1NC	NP8-11X/31 GRN	667138
Selector	Blue, 3-position, latching	1 NO+1NC	NP8-11X/31 BLU	667141
Selector	Yellow, 3-position, latching	1 NO+1NC	NP8-11X/31 YEL	667140
Selector	Black, 3-position, latching	1 NO+1NC	NP8-11X/31 BLK	667137
Selector	White, 3-position, self-return	1 NO+1NC	NP8-11X/33 WHT	578830
Selector	Red, 3-position, self-return	1 NO+1NC	NP8-11X/33 RED	578751
Selector	Green, 3-position, self-return	1 NO+1NC	NP8-11X/33 GRN	578748
Selector	Blue, 3-position, self-return	1 NO+1NC	NP8-11X/33 BLU	578836
Selector	Yellow, 3-position, self-return	1 NO+1NC	NP8-11X/33 YEL	578833
Selector	Black, 3-position, self-return	1 NO+1NC	NP8-11X/33 BLK	667372
Selector	White, 3-position, latching on the left, self-return on the right	1 NO+1NC	NP8-11X/37 WHT	578831
Selector	Red, 3-position, latching on the left, self-return on the right	1 NO+1NC	NP8-11X/37 RED	578752
Selector	Green, 3-position, latching on the left, self-return on the right	1 NO+1NC	NP8-11X/37 GRN	578749
Selector	Blue, 3-position, latching on the left, self-return on the right	1 NO+1NC	NP8-11X/37 BLU	578837
Selector	Yellow, 3-position, latching on the left, self-return on the right	1 NO+1NC	NP8-11X/37 YEL	578834
Selector	Black, 3-position, latching on the left, self-return on the right	1 NO+1NC	NP8-11X/37 BLK	667861
Selector	White, 3-position, latching on the right, self-return on the left	1 NO+1NC	NP8-11X/38 WHT	578832
Selector	Red, 3-position, latching on the right, self-return on the left	1 NO+1NC	NP8-11X/38 RED	578753
Selector	Green, 3-position, latching on the right, self-return on the left	1 NO+1NC	NP8-11X/38 GRN	578750
Selector	Blue, 3-position, latching on the right, self-return on the left	1 NO+1NC	NP8-11X/38 BLU	578838
Selector	Yellow, 3-position, latching on the right, self-return on the left	1 NO+1NC	NP8-11X/38 YEL	578835
Selector	Black, 3-position, latching on the right, self-return on the left	1 NO+1NC	NP8-11X/38 BLK	578770
Illuminated selector	Orange, 2-position, latching, AC 110V-220V LED	1 NO+1NC	NP8-11XD/21 ORG AC 110V-220V	667153
Illuminated selector	Orange, 2-position, latching, AC/DC 24V LED	1 NO+1NC	NP8-11XD/21 ORG AC/DC 24V	667147
Illuminated selector	White, 2-position, latching, AC 110V-220V LED	1 NO+1NC	NP8-11XD/21 WHT AC 110V-220V	667148
Illuminated selector	White, 2-position, latching, AC 110V-230V LED	1 NO+1NC	NP8-11XD/21 WHT AC 110V-230V	667552
Illuminated selector	White, 2-position, latching, AC/DC 24V LED	1 NO+1NC	NP8-11XD/21 WHT AC/DC 24V	667142
Illuminated selector	Green, 2-position, latching, AC/DC 36V LED	1 NO+1NC	NP8-11XD/21 WHT AC/DC 36V	578953

Туре	Color or Function	Contact	Model Description	Code
Illuminated selector	Red, 2-position, latching, AC 110V-220V LED	1 NO+1NC	NP8-11XD/21 RED AC 110V-220V	667150
Illuminated selector	Red, 2-position, latching, AC 110V-230V LED	1 NO+1NC	NP8-11XD/21 RED AC 110V-230V	667554
Illuminated selector	Red, 2-position, latching, AC/DC 24V LED	1 NO+1NC	NP8-11XD/21 RED AC/DC 24V	667144
Illuminated selector	Red, 2-position, latching, AC/DC 36V LED	1 NO+1NC	NP8-11XD/21 RED AC/DC 36V	578954
Illuminated selector	Green, 2-position, latching, AC 110V-220V LED	1 NO+1NC	NP8-11XD/21 GRN AC 110V-220V	667149
Illuminated selector	Green, 2-position, latching, AC 110V-230V LED	1 NO+1NC	NP8-11XD/21 GRN AC 110V-230V	667553
Illuminated selector	Green, 2-position, latching, AC/DC 24V LED	1 NO+1NC	NP8-11XD/21 GRN AC/DC 24V	667143
Illuminated selector	Green, 2-position, latching, AC/DC 36V LED	1 NO+1NC	NP8-11XD/21 GRN AC/DC 36V	578952
Illuminated selector	Blue, 2-position, latching, AC 110V-220V LED	1 NO+1NC	NP8-11XD/21 BLU AC 110V-220V	667152
Illuminated selector	Blue, 2-position, latching, AC 110V-230V LED	1 NO+1NC	NP8-11XD/21 BLU AC 110V-230V	667556
Illuminated selector	Blue, 2-position, latching, AC/DC 24V LED	1 NO+1NC	NP8-11XD/21 BLU AC/DC 24V	667146
Illuminated selector	Blue, 2-position, latching, AC/DC 36V LED	1 NO+1NC	NP8-11XD/21 BLU AC/DC 36V	578957
Illuminated selector	Yellow, 2-position, latching, AC 110V-220V LED	1 NO+1NC	NP8-11XD/21 YEL AC 110V-220V	667151
Illuminated selector	Yellow, 2-position, latching, AC 110V-230V LED	1 NO+1NC	NP8-11XD/21 YEL AC 110V-230V	667555
Illuminated selector	Yelow, 2-position, latching, AC/DC 24V LED	1 NO+1NC	NP8-11XD/21 YEL AC/DC 24V	667145
Illuminated selector	Yellow, 2-position, latching, AC/DC 36V LED	1 NO+1NC	NP8-11XD/21 YEL AC/DC 36V	578956
Illuminated selector	Orange, 2-position, self-return, AC/DC 24V LED	1 NO+1NC	NP8-11XD/22 ORG AC/DC 24V	578809
Illuminated selector	Orange, 2-position, self-return, AC 110V-220V LED	1 NO+1NC	NP8-11XD/22 ORG AC 110V-220V	578813
Illuminated selector	White, 2-position, self-return, AC/DC 24V LED	1 NO+1NC	NP8-11XD/22 WHT AC/DC 24V	578806
Illuminated selector	White, 2-position, self-return, AC 110V-220V LED	1 NO+1NC	NP8-11XD/22 WHT AC 110V-220V	578810
Illuminated selector	White, 2-position, self-return, AC 110V-230V LED	1 NO+1NC	NP8-11XD/22 WHT AC110V-230V	667680
Illuminated selector	Red, 2-position, self-return, AC/DC 24V LED	1 NO+1NC	NP8-11XD/22 RED AC/DC 24V	578687
Illuminated selector	Red, 2-position, self-return, AC 110V-220V LED	1 NO+1NC	NP8-11XD/22 RED AC 110V-220V	578715
Illuminated selector	Red, 2-position, self-return, AC 110V-230V LED	1 NO+1NC	NP8-11XD/22 RED AC110V-230V	667651
Illuminated selector	Green, 2-position, self-return, AC/DC 24V LED	1 NO+1NC	NP8-11XD/22 GRN AC/DC 24V	578686
Illuminated selector	Green, 2-position, self-return, AC 110V-220V LED	1 NO+1NC	NP8-11XD/22 GRN AC 110V-220V	578714
Illuminated selector	Green, 2-position, self-return, AC 110V-230V LED	1 NO+1NC	NP8-11XD/22 GRN AC110V-230V	667650
Illuminated selector	Blue, 2-position, self-return, AC/DC 24V LED	1 NO+1NC	NP8-11XD/22 BLU AC/DC 24V	578808
Illuminated selector	Blue, 2-position, self-return, AC 110V-220V LED	1 NO+1NC	NP8-11XD/22 BLU AC 110V-220V	578812
Illuminated selector	Blue, 2-position, self-return, AC 110V-230V LED	1 NO+1NC	NP8-11XD/22 BLU AC110V-230V	667682
Illuminated selector	Yellow, 2-position, self-return, AC/DC 24V LED	1 NO+1NC	NP8-11XD/22 YEL AC/DC 24V	578807
Illuminated selector	Yellow, 2-position, self-return, AC 110V-220V LED	1 NO+1NC	NP8-11XD/22 YEL AC 110V-220V	578811
Illuminated selector	Yellow, 2-position, self-return, AC 110V-230V LED	1 NO+1NC	NP8-11XD/22 YEL AC110V-230V	667681
Illuminated selector	Orange, 3-position, latching, AC 110V-220V LED	1 NO+1NC	NP8-11XD/31 ORG AC 110V-220V	667165
Illuminated selector	Orange, 3-position, latching, AC/DC 24V LED	1 NO+1NC	NP8-11XD/31 ORG AC/DC 24V	667159
Illuminated selector	White, 3-position, latching, AC 110V-220V LED	1 NO+1NC	NP8-11XD/31 WHT AC 110V-220V	667160
Illuminated selector	White, 3-position, latching, AC 110V-230V LED	1 NO+1NC	NP8-11XD/31 WHT AC 110V-230V	667557
Illuminated selector	White, 3-position, latching, AC/DC 24V LED	1 NO+1NC	NP8-11XD/31 WHT AC/DC 24V	667154
Illuminated selector	White, 3-position, latching, AC/DC 36V LED	1 NO+1NC	NP8-11XD/31 WHT AC/DC 36V	578958
Illuminated selector	Red, 3-position, latching, AC 110V-220V LED	1 NO+1NC	NP8-11XD/31 RED AC 110V-220V	667162
Illuminated selector	Red, 3-position, latching, AC 110V-230V LED	1 NO+1NC	NP8-11XD/31 RED AC 110V-230V	667559
Illuminated selector	Red, 3-position, latching, AC/DC 24V LED	1 NO+1NC	NP8-11XD/31 RED AC/DC 24V	667156
Illuminated selector	Red, 3-position, latching, AC/DC 36V LED	1 NO+1NC	NP8-11XD/31 RED AC/DC 36V	578959
Illuminated selector	Green, 3-position, latching, AC 110V-220V LED	1 NO+1NC	NP8-11XD/31 GRN AC 110V-220V	667161

(P- 423) B.2 Pushbuttons & Indicator Lights & Buzzers | Pushbuttons

Туре	Color or Function	Contact	Model Description	Code
Illuminated selector	Green, 3-position, latching, AC 110V-230V LED	1 NO+1NC	NP8-11XD/31 GRN AC 110V-230V	667558
Illuminated selector	Green, 3-position, latching, AC/DC 24V LED	1 NO+1NC	NP8-11XD/31 GRN AC/DC 24V	667155
Illuminated selector	Green, 3-position, latching, AC/DC 36V LED	1 NO+1NC	NP8-11XD/31 GRN AC/DC 36V	578961
Illuminated selector	Blue, 3-position, latching, AC 110V-220V LED	1 NO+1NC	NP8-11XD/31 BLU AC 110V-220V	667164
Illuminated selector	Blue, 3-position, latching, AC 110V-230V LED	1 NO+1NC	NP8-11XD/31 BLU AC 110V-230V	667561
Illuminated selector	Blue, 3-position, latching, AC/DC 24V LED	1 NO+1NC	NP8-11XD/31 BLU AC/DC 24V	667158
Illuminated selector	Blue, 3-position, latching, AC/DC 36V LED	1 NO+1NC	NP8-11XD/31 BLU AC/DC 36V	578962
Illuminated selector	Yellow, 3-position, latching, AC 110V-220V LED	1 NO+1NC	NP8-11XD/31 YEL AC 110V-220V	667163
Illuminated selector	Yellow, 3-position, latching, AC 110V-230V LED	1 NO+1NC	NP8-11XD/31 YEL AC 110V-230V	667560
Illuminated selector	Yellow, 3-position, latching, AC/DC 24V LED	1 NO+1NC	NP8-11XD/31 YEL AC/DC 24V	667157
Illuminated selector	Yellow, 3-position, latching, AC/DC 36V LED	1 NO+1NC	NP8-11XD/31 YEL AC/DC 36V	578960
Illuminated selector	Orange, 3-position, self-return, AC/DC 24V LED	1 NO+1NC	NP8-11XD/33 ORG AC/DC 24V	578869
Illuminated selector	Orange, 3-position, self-return, AC 110V-220V LED	1 NO+1NC	NP8-11XD/33 ORG AC 110V-220V	578881
Illuminated selector	White, 3-position, self-return, AC/DC 24V LED	1 NO+1NC	NP8-11XD/33 WHT AC/DC 24V	578860
Illuminated selector	White, 3-position, self-return, AC 110V-220V LED	1 NO+1NC	NP8-11XD/33 WHT AC 110V-220V	578872
Illuminated selector	White, 3-position, self-return, AC 110V-230V LED	1 NO+1NC	NP8-11XD/33 WHT AC110V-230V	667689
Illuminated selector	Red, 3-position, self-return, AC/DC 24V LED	1 NO+1NC	NP8-11XD/33 RED AC/DC 24V	578695
Illuminated selector	Red, 3-position, self-return, AC 110V-220V LED	1 NO+1NC	NP8-11XD/33 RED AC 110V-220V	578723
Illuminated selector	Red, 3-position, self-return, AC 110V-230V LED	1 NO+1NC	NP8-11XD/33 RED AC110V-230V	667659
Illuminated selector	Green, 3-position, self-return, AC/DC 24V LED	1 NO+1NC	NP8-11XD/33 GRN AC/DC 24V	578692
Illuminated selector	Green, 3-position, self-return, AC 110V-220V LED	1 NO+1NC	NP8-11XD/33 GRN AC 110V-220V	578720
Illuminated selector	Green, 3-position, self-return, AC 110V-230V LED	1 NO+1NC	NP8-11XD/33 GRN AC110V-230V	667656
Illuminated selector	Blue, 3-position, self-return, AC/DC 24V LED	1 NO+1NC	NP8-11XD/33 BLU AC/DC 24V	578866
Illuminated selector	Blue, 3-position, self-return, AC 110V-220V LED	1 NO+1NC	NP8-11XD/33 BLU AC 110V-220V	578878
Illuminated selector	Blue, 3-position, self-return, AC 110V-230V LED	1 NO+1NC	NP8-11XD/33 BLU AC110V-230V	667695
Illuminated selector	Yellow, 3-position, self-return, AC/DC 24V LED	1 NO+1NC	NP8-11XD/33 YEL AC/DC 24V	578863
Illuminated selector	Yellow, 3-position, self-return, AC 110V-220V LED	1 NO+1NC	NP8-11XD/33 YEL AC 110V-220V	578875
Illuminated selector	Yellow, 3-position, self-return, AC 110V-230V LED	1 NO+1NC	NP8-11XD/33 YEL AC110V-230V	667692
Illuminated selector	Orange, 3-position, latching on the left, self-return on the right, AC/DC 24V LED	1 NO+1NC	NP8-11XD/37 ORG AC/DC 24V	578870
Illuminated selector	Orange, 3-position, latching on the left, self-return on the right, AC 110V-220V LED	1 NO+1NC	NP8-11XD/37 ORG AC 110V-220V	578882
Illuminated selector	White, 3-position, latching on the left, self-return on the right, AC/DC 24V LED	1 NO+1NC	NP8-11XD/37 WHT AC/DC 24V	578861
Illuminated selector	White, 3-position, latching on the left, self-return on the right, AC 110V-220V LED	1 NO+1NC	NP8-11XD/37 WHT AC 110V-220V	578873
Illuminated selector	White, 3-position, latching on the left, self-return on the right, AC 110V-230V LED	1 NO+1NC	NP8-11XD/37 WHT AC110V-230V	667690
Illuminated selector	Red, 3-position, latching on the left, self-return on the right, AC/DC 24V LED	1 NO+1NC	NP8-11XD/37 RED AC/DC 24V	578696
Illuminated selector	Red, 3-position, latching on the left, self-return on the right, AC 110V-220V LED	1 NO+1NC	NP8-11XD/37 RED AC 110V-220V	578724
Illuminated selector	Red, 3-position, latching on the left, self-return on the right, AC 110V-230V LED	1 NO+1NC	NP8-11XD/37 RED AC110V-230V	667660
Illuminated selector	Green, 3-position, latching on the left, self-return on the right, AC/DC 24V LED	1 NO+1NC	NP8-11XD/37 GRN AC/DC 24V	578693
Illuminated selector	Green, 3-position, latching on the left, self-return on the right, AC 110V-220V LED	1 NO+1NC	NP8-11XD/37 GRN AC 110V-220V	578721
Illuminated selector	Green, 3-position, latching on the left, self-return on the right, AC 110V-230V LED	1 NO+1NC	NP8-11XD/37 GRN AC110V-230V	667657
Illuminated selector	Blue, 3-position, latching on the left, self-return on the right, AC/DC 24V LED	1 NO+1NC	NP8-11XD/37 BLU AC/DC 24V	578867
Illuminated selector	Blue, 3-position, latching on the left, self-return on the right, AC 110V-220V LED	1 NO+1NC	NP8-11XD/37 BLU AC 110V-220V	578879
Illuminated selector	Blue, 3-position, latching on the left, self-return on the right, AC 110V-230V LED	1 NO+1NC	NP8-11XD/37 BLU AC110V-230V	667696
Illuminated selector	Yellow, 3-position, latching on the left, self-return on the right, AC/DC 24V LED	1 NO+1NC	NP8-11XD/37 YEL AC/DC 24V	578864
Illuminated selector	Yellow, 3-position, latching on the left, self-return on the right, AC 110V-220V LED	1 NO+1NC	NP8-11XD/37 YEL AC 110V-220V	578876
		1		

Pushbuttons | B.2 Pushbuttons & Indicator Lights & Buzzers (P- 424)

Туре	Color or Function	Contact	Model Description	Code
Illuminated selector	Yellow, 3-position, latching on the left, self-return on the right, AC 110V-230V LED	1 NO+1NC	NP8-11XD/37 YEL AC110V-230V	667693
Illuminated selector	Orange, 3-position, latching on the right, self-return on the left, AC/DC 24V LED	1 NO+1NC	NP8-11XD/38 ORG AC/DC 24V	578871
Illuminated selector	Orange, 3-position, latching on the right, self-return on the left, AC 110V-220V LED	1 NO+1NC	NP8-11XD/38 ORG AC 110V-220V	578883
Illuminated selector	White, 3-position, latching on the right, self-return on the left, AC/DC 24V LED	1 NO+1NC	NP8-11XD/38 WHT AC/DC 24V	578862
Illuminated selector	White, 3-position, latching on the right, self-return on the left, AC 110V-220V LED	1 NO+1NC	NP8-11XD/38 WHT AC 110V-220V	578874
Illuminated selector	White, 3-position, latching on the right, self-return on the left, AC 110V-230V LED	1 NO+1NC	NP8-11XD/38 WHT AC110V-230V	667691
Illuminated selector	Red, 3-position, latching on the right, self-return on the left, AC/DC 24V LED $% \left({{{\left({{\left({{\left({{\left({{\left({{\left({{\left$	1 NO+1NC	NP8-11XD/38 RED AC/DC 24V	578697
Illuminated selector	Red, 3-position, latching on the right, self-return on the left, AC 110V-220V LED	1 NO+1NC	NP8-11XD/38 RED AC 110V-220V	578725
Illuminated selector	Red, 3-position, latching on the right, self-return on the left, AC 110V-230V LED	1 NO+1NC	NP8-11XD/38 RED AC110V-230V	667661
Illuminated selector	Green, 3-position, latching on the right, self-return on the left, AC/DC 24V LED	1 NO+1NC	NP8-11XD/38 GRN AC/DC 24V	578694
Illuminated selector	Green, 3-position, latching on the right, self-return on the left, AC 110V-220V LED	1 NO+1NC	NP8-11XD/38 GRN AC 110V-220V	578722
Illuminated selector	Green, 3-position, latching on the right, self-return on the left, AC 110V-230V LED	1 NO+1NC	NP8-11XD/38 GRN AC110V-230V	667658
Illuminated selector	Blue, 3-position, latching on the right, self-return on the left, AC/DC 24V LED	1 NO+1NC	NP8-11XD/38 BLU AC/DC 24V	578868
Illuminated selector	Blue, 3-position, latching on the right, self-return on the left, AC 110V-220V LED	1 NO+1NC	NP8-11XD/38 BLU AC 110V-220V	578880
Illuminated selector	Blue, 3-position, latching on the right, self-return on the left, AC 110V-230V LED	1 NO+1NC	NP8-11XD/38 BLU AC110V-230V	667697
Illuminated selector	Yellow, 3-position, latching on the right, self-return on the left, AC/DC 24V LED	1 NO+1NC	NP8-11XD/38 YEL AC/DC 24V	578865
Illuminated selector	Yellow, 3-position, latching on the right, self-return on the left, AC 110V-220V LED	1 NO+1NC	NP8-11XD/38 YEL AC 110V-220V	578877
Illuminated selector	Yellow, 3-position, latching on the right, self-return on the left, AC 110V-230V LED	1 NO+1NC	NP8-11XD/38 YEL AC110V-230V	667694
Key selector	2-position, latching	1 NO+1NC	NP8-11Y/21	667180
Key selector	2-position, self-return	1 NO+1NC	NP8-11Y/22	578670
Key selector	3-position, latching	1 NO+1NC	NP8-11Y/31	667183
Key selector	3-position, self-return	1 NO+1NC	NP8-11Y/33	578673
Key selector	3-position, latching on the left, self-return on the right	1 NO+1NC	NP8-11Y/37	578674
		1 NO+1NC		578675
Key selector	3-position, latching on the right, self-return on the left			
Mushroom button	Red, Φ40mm, latching, turn release	1 NO+1NC	NP8-11ZS/1 RED	667129
Mushroom button	Red, Φ60mm, latching, turn release		NP8-11ZS/2 RED	667130
Mushroom button	Red, Ø30mm, latching, turn release	1 NO+1NC	NP8-11ZS/3 RED	667854
Flush button	White	1 NO+2NC	NP8-12BN WHT	368581
Flush button	Red	1 NO+2NC	NP8-12BN RED	368584
Flush button	Green	1 NO+2NC	NP8-12BN GRN	368583
Flush button	Blue	1 NO+2NC	NP8-12BN BLU	368586
Flush button	Yellow	1 NO+2NC	NP8-12BN YEL	368585
Flush button	Black	1 NO+2NC	NP8-12BN BLK	368582
Mushroom button	Red, Φ40mm	1 NO+2NC		667370
Mushroom button	Green, Φ40mm	1 NO+2NC	NP8-12M/1 GRN	667369
Flush button	White	2 NO	NP8-20BN WHT	667867
Flush button				
	Red	2 NO	NP8-20BN RED	667237
Flush button	Green	2 NO	NP8-20BN GRN	667236
Flush button	Blue	2 NO	NP8-20BN BLU	578932
Flush button	Yellow	2 NO	NP8-20BN YEL	667334
Flush button	Black	2 NO	NP8-20BN BLK	667868
Illuminated flush button	Orange, AC 110V-220V LED	2 NO	NP8-20BND ORG AC 110V-220V	578653
Illuminated flush button	Orange, AC/DC 24V LED	2 NO	NP8-20BND ORG AC/DC 24V	578650

(P- 425) B.2 Pushbuttons & Indicator Lights & Buzzers | Pushbuttons

Туре	Color or Function	Contact	Model Description	Code
Illuminated flush button	White, AC 110V-220V LED	2 NO	NP8-20BND WHT AC 110V-220V	578652
Illuminated flush button	White, AC 110V-230V LED	2 NO	NP8-20BND WHT AC 110V-230V	667642
Illuminated flush button	White, AC/DC 24V LED	2 NO	NP8-20BND WHT AC/DC 24V	578649
Illuminated flush button	Red, AC 110V-220V LED	2 NO	NP8-20BND RED AC 110V-220V	667259
Illuminated flush button	Red, AC 110V-230V LED	2 NO	NP8-20BND RED AC 110V-230V	667592
Illuminated flush button	Red, AC/DC 24V LED	2 NO	NP8-20BND RED AC/DC 24V	667245
Illuminated flush button	Green, AC 110V-220V LED	2 NO	NP8-20BND GRN AC 110V-220V	667258
Illuminated flush button	Green, AC 110V-230V LED	2 NO	NP8-20BND GRN AC 110V-230V	667591
Illuminated flush button	Green, AC/DC 24V LED	2 NO	NP8-20BND GRN AC/DC 24V	667244
Illuminated flush button	Blue, AC 110V-220V LED	2 NO	NP8-20BND BLU AC 110V-220V	578651
Illuminated flush button	Blue, AC 110V-230V LED	2 NO	NP8-20BND BLU AC 110V-230V	667641
Illuminated flush button	Blue, AC/DC 24V LED	2 NO	NP8-20BND BLU AC/DC 24V	578648
Illuminated flush button	Yellow, AC 110V-220V LED	2 NO	NP8-20BND YEL AC 110V-220V	667336
Illuminated flush button	Yellow, AC 110V-230V LED	2 NO	NP8-20BND YEL AC 110V-230V	667620
Illuminated flush button	Yellow, AC/DC 24V LED	2 NO	NP8-20BND YEL AC/DC 24V	667335
Projecting button	Red	2 NO	NP8-20GN RED	667297
Projecting button	Green	2 NO	NP8-20GN GRN	667296
Illuminated projecting button	Red, AC 110V-220V LED	2 NO	NP8-20GND RED AC 110V-220V	667317
Illuminated projecting button	Red, AC 110V-230V LED	2 NO	NP8-20GND RED AC 110V-230V	667612
Illuminated projecting button	Red, AC/DC 24V LED	2 NO	NP8-20GND RED AC/DC 24V	667307
Illuminated projecting button	Green, AC 110V-220V LED	2 NO	NP8-20GND GRN AC 110V-220V	667316
Illuminated projecting button	Green, AC 110V-230V LED	2 NO	NP8-20GND GRN AC 110V-230V	667611
Illuminated projecting button	Green, AC/DC 24V LED	2 NO	NP8-20GND GRN AC/DC 24V	667306
Mushroom button	Red, Φ40mm	2 NO	NP8-20M/1 RED	667269
Mushroom button	Green, Φ40mm	2 NO	NP8-20M/1 GRN	667268
Illuminated mushroom button	Red, Φ40mm, AC 110V-220V LED	2 NO	NP8-20MD/1 RED AC 110V-220V	667289
Illuminated mushroom button	Red, Φ40mm, AC 110V-230V LED	2 NO	NP8-20MD/1 RED AC 110V-230V	667602
Illuminated mushroom button	Red, Φ40mm, AC/DC 24V LED	2 NO	NP8-20MD/1 RED AC/DC 24V	667279
Illuminated mushroom button	Green, Φ40mm, AC 110V-220V LED	2 NO	NP8-20MD/1 GRN AC 110V-220V	667288
Illuminated mushroom button	Green, Φ40mm, AC 110V-230V LED	2 NO	NP8-20MD/1 GRN AC 110V-230V	667601
Illuminated mushroom button	Green, Φ40mm, AC/DC 24V LED	2 NO	NP8-20MD/1 GRN AC/DC 24V	667278
Illuminated mushroom button	Red, Φ60mm, AC 110V-220V LED	2 NO	NP8-20MD/2 RED AC 110V-220V	667364
Illuminated mushroom button	Red, Φ60mm, AC 110V-230V LED	2 NO	NP8-20MD/2 RED AC 110V-230V	667633
Illuminated mushroom button	Green, Φ60mm, AC 110V-220V LED	2 NO	NP8-20MD/2 GRN AC 110V-220V	667365
Illuminated mushroom button	Green, Φ60mm, AC 110V-230V LED	2 NO	NP8-20MD/2 GRN AC 110V-230V	667634
Double headed button	1 green and 1 red flush button	2 NO	NP8-20S	667319
Illuminated double headed button	1 green and 1 red flush button, 1 orange pilot light, AC 110V-220V LED	2 NO	NP8-20SD ORG AC 110V-220V	667345
Illuminated double headed button	1 green and 1 red flush button, 1 orange pilot light, AC/DC 24V LED	2 NO	NP8-20SD ORG AC/DC 24V	667339
Illuminated double headed button	1 green and 1 red flush button, 1 white pilot light, AC 110V-220V LED	2 NO	NP8-20SD WHT AC 110V-220V	667344
Illuminated double headed button	1 green and 1 red flush button, 1 white pilot light, AC 110V-230V LED	2 NO	NP8-20SD WHT AC 110V-230V	667621
Illuminated double headed button	1 green and 1 red flush button, 1 white pilot light, AC/ DC 24V LED	2 NO	NP8-20SD WHT AC/DC 24V	667338
Illuminated double headed button	1 green and 1 red flush button, 1 red pilot light, AC 110V-220V LED	2 NO	NP8-20SD RED AC 110V-220V	667346
Illuminated double headed button	1 green and 1 red flush button, 1 red pilot light, AC 110V-230V LED	2 NO	NP8-20SD RED AC 110V-230V	667622
Illuminated double headed button	1 green and 1 red flush button, 1 red pilot light, AC/DC 24V LED	2 NO	NP8-20SD RED AC/DC 24V	667340

Туре	Color or Function	Contact	Model Description	Code
Illuminated double headed button	1 green and 1 red flush button, 1 green pilot light, AC 110V-220V LED	2 NO	NP8-20SD GRN AC 110V-220V	667349
Illuminated double headed button	1 green and 1 red flush button, 1 green pilot light, AC 110V-230V LED	2 NO	NP8-20SD GRN AC 110V-230V	667625
Illuminated double headed button	1 green and 1 red flush button, 1 green pilot light, AC/DC 24V LED	2 NO	NP8-20SD GRN AC/DC 24V	667343
Illuminated double headed button	1 green and 1 red flush button, 1 blue pilot light, AC 110V-220V LED	2 NO	NP8-20SD BLU AC 110V-220V	667348
Illuminated double headed button	1 green and 1 red flush button, 1 blue pilot light, AC 110V-230V LED	2 NO	NP8-20SD BLU AC 110V-230V	667624
Illuminated double headed button	1 green and 1 red flush button, 1 blue pilot light, AC/DC 24V LED	2 NO	NP8-20SD BLU AC/DC 24V	667342
Illuminated double headed button	1 green and 1 red flush button, 1 yellow pilot light, AC 110V-220V LED	2 NO	NP8-20SD YEL AC 110V-220V	667347
Illuminated double headed button	1 green and 1 red flush button, 1 yellow pilot light, AC 110V-230V LED	2 NO	NP8-20SD YEL AC 110V-230V	667623
Illuminated double headed button	1 green and 1 red flush button, 1 yellow pilot light, AC/DC 24V LED	2 NO	NP8-20SD YEL AC/DC 24V	667341
Selector	White, 2-position, latching	2 NO	NP8-20X/21 WHT	578933
Selector	Red, 2-position, latching	2 NO	NP8-20X/21 RED	667225
Selector	Green, 2-position, latching	2 NO	NP8-20X/21 GRN	667224
Selector	Yellow, 2-position, latching	2 NO	NP8-20X/21 YEL	667721
Selector	Black, 2-position, latching	2 NO	NP8-20X/21 BLK	578937
Selector	White, 2-position, self-return	2 NO	NP8-20X/22 WHT	578786
Selector	Red, 2-position, self-return	2 NO	NP8-20X/22 RED	578747
Selector	Green, 2-position, self-return	2 NO	NP8-20X/22 GRN	578746
Selector	Blue, 2-position, self-return	2 NO	NP8-20X/22 BLU	578789
Selector	Yellow, 2-position, self-return	2 NO	NP8-20X/22 YEL	578788
Selector	Black, 2-position, self-return	2 NO	NP8-20X/22 BLK	578787
Selector	White, 3-position, latching	2 NO	NP8-20X/31 WHT	578934
Selector	Red, 3-position, latching	2 NO	NP8-20X/31 RED	667229
Selector	Green, 3-position, latching	2 NO	NP8-20X/31 GRN	667228
Selector	Blue, 3-position, latching	2 NO	NP8-20X/31 BLU	578939
Selector	Yellow, 3-position, latching	2 NO	NP8-20X/31 YEL	667368
Selector	Black, 3-position, latching	2 NO	NP8-20X/31 BLK	578131
Selector	White, 3-position, self-return	2 NO	NP8-20X/33 WHT	578851
Selector	Red, 3-position, self-return	2 NO	NP8-20X/33 RED	578763
Selector	Green, 3-position, self-return	2 NO	NP8-20X/33 GRN	578760
Selector	Blue, 3-position, self-return	2 NO	NP8-20X/33 BLU	578857
Selector	Yellow, 3-position, self-return	2 NO	NP8-20X/33 YEL	578854
Selector	Black, 3-position, self-return	2 NO	NP8-20X/33 BLK	578767
Selector	White, 3-position, latching on the left, self-return on the right	2 NO	NP8-20X/37 WHT	578852
Selector	Red, 3-position, latching on the left, self-return on the right	2 NO	NP8-20X/37 RED	578764
Selector	Green, 3-position, latching on the left, self-return on the right	2 NO	NP8-20X/37 GRN	578761
Selector	Blue, 3-position, latching on the left, self-return on the right	2 NO	NP8-20X/37 BLU	578858
Selector	Yellow, 3-position, latching on the left, self-return on the right	2 NO	NP8-20X/37 YEL	578855
Selector	Black, 3-position, latching on the left, self-return on the right	2 NO	NP8-20X/37 BLK	578768
Selector	White, 3-position, latching on the right, self-return on the left	2 NO	NP8-20X/38 WHT	578853
Selector	Red, 3-position, latching on the right, self-return on the left	2 NO	NP8-20X/38 RED	578765
Selector	Green, 3-position, latching on the right, self-return on the left	2 NO	NP8-20X/38 GRN	578762
Selector	Blue, 3-position, latching on the right, self-return on the left	2 NO	NP8-20X/38 BLU	578859
Selector	Yellow, 3-position, latching on the right, self-return on the left	2 NO	NP8-20X/38 YEL	578856
Selector	Black, 3-position, latching on the right, self-return on the left	2 NO	NP8-20X/38 BLK	578769

(P- 427) B.2 Pushbuttons & Indicator Lights & Buzzers | Pushbuttons

Туре	Color or Function	Contact	Model Description	Code
Illuminated selector	Red, 2-position, latching, AC 110V-220V LED	2 NO	NP8-20XD/21 RED AC 110V-220V	667205
Illuminated selector	Red, 2-position, latching, AC 110V-230V LED	2 NO	NP8-20XD/21 RED AC 110V-230V	667574
Illuminated selector	Red, 2-position, latching, AC/DC 24V LED	2 NO	NP8-20XD/21 RED AC/DC 24V	667193
Illuminated selector	Green, 2-position, latching, AC 110V-220V LED	2 NO	NP8-20XD/21 GRN AC 110V-220V	667204
Illuminated selector	Green, 2-position, latching, AC 110V-230V LED	2 NO	NP8-20XD/21 GRN AC 110V-230V	667573
Illuminated selector	Green, 2-position, latching, AC/DC 24V LED	2 NO	NP8-20XD/21 GRN AC/DC 24V	667192
Illuminated selector	Green, 2-position, latching, AC/DC 36V LED	2 NO	NP8-20XD/21 GRN AC/DC 36V	578955
Illuminated selector	Orange, 2-position, self-return, AC/DC 24V LED	2 NO	NP8-20XD/22 ORG AC/DC 24V	578825
Illuminated selector	Orange, 2-position, self-return, AC 110V-220V LED	2 NO	NP8-20XD/22 ORG AC 110V-220V	578829
Illuminated selector	White, 2-position, self-return, AC/DC 24V LED	2 NO	NP8-20XD/22 WHT AC/DC 24V	578822
Illuminated selector	White, 2-position, self-return, AC 110V-220V LED	2 NO	NP8-20XD/22 WHT AC 110V-220V	578826
Illuminated selector	White, 2-position, self-return, AC 110V-230V LED	2 NO	NP8-20XD/22 WHT AC110V-230V	667686
Illuminated selector	Red, 2-position, self-return, AC/DC 24V LED	2 NO	NP8-20XD/22 RED AC/DC 24V	578691
Illuminated selector	Red, 2-position, self-return, AC 110V-220V LED	2 NO	NP8-20XD/22 RED AC 110V-220V	578719
Illuminated selector	Red, 2-position, self-return, AC 110V-230V LED	2 NO	NP8-20XD/22 RED AC110V-230V	667655
Illuminated selector	Green, 2-position, self-return, AC/DC 24V LED	2 NO	NP8-20XD/22 GRN AC/DC 24V	578690
Illuminated selector	Green, 2-position, self-return, AC 110V-220V LED	2 NO	NP8-20XD/22 GRN AC 110V-220V	578718
Illuminated selector	Green, 2-position, self-return, AC 110V-230V LED	2 NO	NP8-20XD/22 GRN AC110V-230V	667654
Illuminated selector	Blue, 2-position, self-return, AC/DC 24V LED	2 NO	NP8-20XD/22 BLU AC/DC 24V	578824
Illuminated selector	Blue, 2-position, self-return, AC 110V-220V LED	2 NO	NP8-20XD/22 BLU AC 110V-220V	578828
Illuminated selector	Blue, 2-position, self-return, AC 110V-230V LED	2 NO	NP8-20XD/22 BLU AC110V-230V	667688
Illuminated selector	Yellow, 2-position, self-return, AC/DC 24V LED	2 NO	NP8-20XD/22 YEL AC/DC 24V	578823
Illuminated selector	Yellow, 2-position, self-return, AC 110V-220V LED	2 NO	NP8-20XD/22 YEL AC 110V-220V	578827
Illuminated selector	Yellow, 2-position, self-return, AC 110V-230V LED	2 NO	NP8-20XD/22 YEL AC110V-230V	667687
Illuminated selector	Orange, 3-position, latching, AC 110V-220V LED	2 NO	NP8-20XD/31 ORG AC 110V-220V	667325
Illuminated selector	Orange, 3-position, latching, AC/DC 24V LED	2 NO	NP8-20XD/31 ORG AC/DC 24V	667329
Illuminated selector	White, 3-position, latching, AC 110V-220V LED	2 NO	NP8-20XD/31 WHT AC 110V-220V	667322
Illuminated selector	White, 3-position, latching, AC 110V-230V LED	2 NO	NP8-20XD/31 WHT AC 110V-230V	667614
Illuminated selector	White, 3-position, latching, AC/DC 24V LED	2 NO	NP8-20XD/31 WHT AC/DC 24V	667326
Illuminated selector	Red, 3-position, latching, AC 110V-220V LED	2 NO	NP8-20XD/31 RED AC 110V-220V	667209
Illuminated selector	Red, 3-position, latching, AC 110V-230V LED	2 NO	NP8-20XD/31 RED AC 110V-230V	667578
Illuminated selector	Red, 3-position, latching, AC/DC 24V LED	2 NO	NP8-20XD/31 RED AC/DC 24V	667197
Illuminated selector	Green, 3-position, latching, AC 110V-220V LED	2 NO	NP8-20XD/31 GRN AC 110V-220V	667208
Illuminated selector	Green, 3-position, latching, AC 110V-230V LED	2 NO	NP8-20XD/31 GRN AC 110V-230V	667577
Illuminated selector	Green, 3-position, latching, AC/DC 24V LED	2 NO	NP8-20XD/31 GRN AC/DC 24V	667196
Illuminated selector	Green, 3-position, latching, AC/DC 36V LED	2 NO	NP8-20XD/31 GRN AC/DC 36V	578963
Illuminated selector	Blue, 3-position, latching, AC 110V-220V LED	2 NO	NP8-20XD/31 BLU AC 110V-220V	667324
Illuminated selector	Blue, 3-position, latching, AC 110V-230V LED	2 NO	NP8-20XD/31 BLU AC 110V-230V	667616
Illuminated selector	Blue, 3-position, latching, AC/DC 24V LED	2 NO	NP8-20XD/31 BLU AC/DC 24V	667328
Illuminated selector	Yellow, 3-position, latching, AC 110V-220V LED	2 NO	NP8-20XD/31 YEL AC 110V-220V	667323
Illuminated selector	Yellow, 3-position, latching, AC 110V-230V LED	2 NO	NP8-20XD/31 YEL AC 110V-230V	667615
Illuminated selector	Yellow, 3-position, latching, AC/DC 24V LED	2 NO	NP8-20XD/31 YEL AC/DC 24V	667327
Illuminated selector	Orange, 3-position, self-return, AC/DC 24V LED	2 NO	NP8-20XD/33 ORG AC/DC 24V	578917
Illuminated selector	Orange, 3-position, self-return, AC 110V-220V LED	2 NO	NP8-20XD/33 ORG AC 110V-220V	578929

Туре	Color or Function	Contact	Model Description	Code
Illuminated selector	White, 3-position, self-return, AC/DC 24V LED	2 NO	NP8-20XD/33 WHT AC/DC 24V	578908
Illuminated selector	White, 3-position, self-return, AC 110V-220V LED	2 NO	NP8-20XD/33 WHT AC 110V-220V	578920
Illuminated selector	White, 3-position, self-return, AC 110V-230V LED	2 NO	NP8-20XD/33 WHT AC110V-230V	667707
Illuminated selector	Red, 3-position, self-return, AC/DC 24V LED	2 NO	NP8-20XD/33 RED AC/DC 24V	578707
Illuminated selector	Red, 3-position, self-return, AC 110V-220V LED	2 NO	NP8-20XD/33 RED AC 110V-220V	578735
Illuminated selector	Red, 3-position, self-return, AC 110V-230V LED	2 NO	NP8-20XD/33 RED AC110V-230V	667671
Illuminated selector	Green, 3-position, self-return, AC/DC 24V LED	2 NO	NP8-20XD/33 GRN AC/DC 24V	578704
Illuminated selector	Green, 3-position, self-return, AC 110V-220V LED	2 NO	NP8-20XD/33 GRN AC 110V-220V	578732
Illuminated selector	Green, 3-position, self-return, AC 110V-230V LED	2 NO	NP8-20XD/33 GRN AC110V-230V	667668
Illuminated selector	Blue, 3-position, self-return, AC/DC 24V LED	2 NO	NP8-20XD/33 BLU AC/DC 24V	578914
Illuminated selector	Blue, 3-position, self-return, AC 110V-220V LED	2 NO	NP8-20XD/33 BLU AC 110V-220V	578926
Illuminated selector	Blue, 3-position, self-return, AC 110V-230V LED	2 NO	NP8-20XD/33 BLU AC110V-230V	667713
Illuminated selector	Yellow, 3-position, self-return, AC/DC 24V LED	2 NO	NP8-20XD/33 YEL AC/DC 24V	578911
Illuminated selector	Yellow, 3-position, self-return, AC 110V-220V LED	2 NO	NP8-20XD/33 YEL AC 110V-220V	578923
Illuminated selector	Yellow, 3-position, self-return, AC 110V-230V LED	2 NO	NP8-20XD/33 YEL AC110V-230V	667710
Illuminated selector	Orange, 3-position, latching on the left, self-return on the right, AC/DC 24V LED	2 NO	NP8-20XD/37 ORG AC/DC 24V	578918
Illuminated selector	Orange, 3-position, latching on the left, self-return on the right, AC 110V-220V LED	2 NO	NP8-20XD/37 ORG AC 110V-220V	578930
Illuminated selector	White, 3-position, latching on the left, self-return on the right, AC/DC 24V LED	2 NO	NP8-20XD/37 WHT AC/DC 24V	578909
Illuminated selector	White, 3-position, latching on the left, self-return on the right, AC 110V-220V LED	2 NO	NP8-20XD/37 WHT AC 110V-220V	578921
Illuminated selector	White, 3-position, latching on the left, self-return on the right, AC 110V-230V LED	2 NO	NP8-20XD/37 WHT AC110V-230V	667708
Illuminated selector	Red, 3-position, latching on the left, self-return on the right, AC/DC 24V LED	2 NO	NP8-20XD/37 RED AC/DC 24V	578708
Illuminated selector	Red, 3-position, latching on the left, self-return on the right, AC 110V-220V LED	2 NO	NP8-20XD/37 RED AC 110V-220V	578736
Illuminated selector	Red, 3-position, latching on the left, self-return on the right, AC 110V-230V LED	2 NO	NP8-20XD/37 RED AC110V-230V	667672
Illuminated selector	Green, 3-position, latching on the left, self-return on the right, AC/DC 24V LED	2 NO	NP8-20XD/37 GRN AC/DC 24V	578705
Illuminated selector	Green, 3-position, latching on the left, self-return on the right, AC 110V-220V LED	2 NO	NP8-20XD/37 GRN AC 110V-220V	578733
Illuminated selector	Green, 3-position, latching on the left, self-return on the right, AC 110V-230V LED	2 NO	NP8-20XD/37 GRN AC110V-230V	667669
Illuminated selector	Blue, 3-position, latching on the left, self-return on the right, AC/DC 24V LED	2 NO	NP8-20XD/37 BLU AC/DC 24V	578915
Illuminated selector	Blue, 3-position, latching on the left, self-return on the right, AC 110V-220V LED	2 NO	NP8-20XD/37 BLU AC 110V-220V	578927
Illuminated selector	Blue, 3-position, latching on the left, self-return on the right, AC 110V-230V LED	2 NO	NP8-20XD/37 BLU AC110V-230V	667714
Illuminated selector	Yellow, 3-position, latching on the left, self-return on the right, AC/DC 24V LED	2 NO	NP8-20XD/37 YEL AC/DC 24V	578912
Illuminated selector	Yellow, 3-position, latching on the left, self-return on the right, AC 110V-220V LED	2 NO	NP8-20XD/37 YEL AC 110V-220V	578924
Illuminated selector	Yellow, 3-position, latching on the left, self-return on the right, AC 110V-230V LED	2 NO	NP8-20XD/37 YEL AC110V-230V	667711
Illuminated selector	Orange, 3-position, latching on the right, self-return on the left, AC/DC 24V LED	2 NO	NP8-20XD/38 ORG AC/DC 24V	578919
Illuminated selector	Orange, 3-position, latching on the right, self-return on the left, AC 110V-220V LED	2 NO	NP8-20XD/38 ORG AC 110V-220V	578931
Illuminated selector	White, 3-position, latching on the right, self-return on the left, AC/DC 24V LED	2 NO	NP8-20XD/38 WHT AC/DC 24V	578910
Illuminated selector	White, 3-position, latching on the right, self-return on the left, AC 110V-220V LED	2 NO	NP8-20XD/38 WHT AC 110V-220V	578922
Illuminated selector	White, 3-position, latching on the right, self-return on the left, AC 110V-230V LED	2 NO	NP8-20XD/38 WHT AC110V-230V	667709

(P- 429) B.2 Pushbuttons & Indicator Lights & Buzzers | Pushbuttons

Туре	Color or Function	Contact	Model Description	Code
Illuminated selector	Red, 3-position, latching on the right, self-return on the left, AC/DC 24V LED	2 NO	NP8-20XD/38 RED AC/DC 24V	578709
Illuminated selector	Red, 3-position, latching on the right, self-return on the left, AC 110V-220V LED	2 NO	NP8-20XD/38 RED AC 110V-220V	578737
Illuminated selector	Red, 3-position, latching on the right, self-return on the left, AC 110V-230V LED	2 NO	NP8-20XD/38 RED AC110V-230V	667673
Illuminated selector	Green, 3-position, latching on the right, self-return on the left, AC/DC 24V LED	2 NO	NP8-20XD/38 GRN AC/DC 24V	578706
Illuminated selector	Green, 3-position, latching on the right, self-return on the left, AC 110V-220V LED	2 NO	NP8-20XD/38 GRN AC 110V-220V	578734
Illuminated selector	Green, 3-position, latching on the right, self-return on the left, AC 110V-230V LED	2 NO	NP8-20XD/38 GRN AC110V-230V	667670
Illuminated selector	Blue, 3-position, latching on the right, self-return on the left, AC/DC 24V LED	2 NO	NP8-20XD/38 BLU AC/DC 24V	578916
Illuminated selector	Blue, 3-position, latching on the right, self-return on the left, AC 110V-220V LED	2 NO	NP8-20XD/38 BLU AC 110V-220V	578928
Illuminated selector	Blue, 3-position, latching on the right, self-return on the left, AC 110V-230V LED	2 NO	NP8-20XD/38 BLU AC110V-230V	667715
Illuminated selector	Yellow, 3-position, latching on the right, self-return on the left, AC/DC 24V LED	2 NO	NP8-20XD/38 YEL AC/DC 24V	578913
Illuminated selector	Yellow, 3-position, latching on the right, self-return on the left, AC 110V-220V LED	2 NO	NP8-20XD/38 YEL AC 110V-220V	578925
Illuminated selector	Yellow, 3-position, latching on the right, self-return on the left, AC 110V-230V LED	2 NO	NP8-20XD/38 YEL AC110V-230V	667712
Key selector	2-position, latching	2 NO	NP8-20Y/21	667182
Key selector	2-position, self-return	2 NO	NP8-20Y/22	578672
Key selector	3-position, latching	2 NO	NP8-20Y/31	667185
Key selector	3-position, self-return	2 NO	NP8-20Y/33	578679
Key selector	3-position, latching on the left, self-return on the right	2 NO	NP8-20Y/37	578680
Key selector	3-position, latching on the right, self-return on the left	2 NO	NP8-20Y/38	578681
Mushroom button	Red, Φ40mm, latching, turn release	2 NO	NP8-20ZS/1 RED	667216
Mushroom button	Red, Φ60mm, latching, turn release	2 NO	NP8-20ZS/2 RED	667217
Mushroom button	Red, Ф30mm, latching, turn release	2 NO	NP8-20ZS/3 RED	667852
Flush button	White	2 NO+1NC	NP8-21BN WHT	368587
Flush button	Red	2 NO+1NC	NP8-21BN RED	667722
Flush button	Green	2 NO+1NC	NP8-21BN GRN	667723
Flush button	Blue	2 NO+1NC	NP8-21BN BLU	368589
Flush button	Yellow	2 NO+1NC	NP8-21BN YEL	667724
Flush button	Black	2 NO+1NC	NP8-21BN BLK	368588
Flush button	White	3NO	NP8-30BN WHT	368570
Flush button	Red	3NO	NP8-30BN RED	368573
Flush button	Green	3NO	NP8-30BN GRN	368572
Flush button	Blue	3NO	NP8-30BN BLU	368575
Flush button	Yellow	3NO	NP8-30BN YEL	368574
Flush button	Black	3NO	NP8-30BN BLK	368571